# **HITACHI**

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.

FOR MESSRS:	DATE: Jan. 27 <sup>th</sup> 2010

## **CUSTOMER'S ACCEPTANCE SPECIFICATIONS**

# TX20D26VM0APA

## Contents

No.	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701-TX20D26VM0APA-2	1-1/1
2	RECORD OF REVISION	7B64PS 2702-TX20D26VM0APA-2	2-1/1
3	GENERAL DATA	7B64PS 2703-TX20D26VM0APA-2	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704-TX20D26VM0APA-2	4-1/1
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705-TX20D26VM0APA-2	5-1/1
6	OPTICAL CHARACTERISTICS	7B64PS 2706-TX20D26VM0APA-2	6-1/2~2/2
7	BLOCK DIAGRAME	7B64PS 2707-TX20D26VM0APA-2	7-1/1
8	RELIABILITY TESTS	7B64PS 2708-TX20D26VM0APA-2	8-1/1
9	LCD INTERFACE	7B64PS 2709-TX20D26VM0APA-2	9-1/5~5/5
10	OUTLINE DIMENSIONS	7B63PS 2710-TX20D26VM0APA-2	10-1/3~3/3
11	TOUCH PANEL	7B64PS 2711-TX20D26VM0APA-2	11-1/2~2/2
12	APPEARANCE STANDARD	7B64PS 2712-TX20D26VM0APA-2	12-1/4~4/4
13	PRECAUTIONS	7B64PS 2713-TX20D26VM0APA-2	13-1/2~2/2
14	DESIGNATION OF LOT MARK	7B64PS 2714-TX20D26VM0APA-2	14-1/1~1/1

ACCEPTED BY:	PROPOSED BY:	Kenthen
--------------	--------------	---------

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2701-TX20D26VM0APA-2	PAGE	1-1/1
--	--------------	-----------------------------	------	-------

# 2. RECORD OF REVISION

DATE	SHEET No.				SUMMARY				
Jan.25,'10	7B64PS 2703 –		DISPLAY FEATURE	S					
	TX20D26VM0APA-2	Cha	anged		T				
	Page 3 – 1/1		Power Supply Volt	age	3.3V for LCD; 26.6	6V for Backlight			
			Power Consumption	on	1.32 W for LCD; 1	0.6W for backlight			
			Viewing Direction		Super Wide Version	on			
					<b>↓</b>				
			Power Supply Volt	age	3.3V for LCD; 21.7	7V for Backlight			
			Power Consumption	on	1.32 W for LCD; 8	.68W for backlight			
			Viewing Direction		Super Wide Version	on (In Plane Switching)			
	7B64PS 2705 –	5.2	BACKLIGHT CHARA	ACTE	RISTICS				
	TX20D26VM0APA-2		anged	TOTE	NOTICO				
	Page 5 – 1/1		904		Item T	ур.			
				IF	O Input Voltage	<del>-</del>			
					J Input Voltage				
					Item T	ур.			
				LEC		21.7			
				LLL	7 Input Voltage   2				
	7B64PS 2708 –		RELIABILITY TESTS						
	TX20D26VM0APA-2 Page 8 – 1/1	Add	led Note 3						
	7B64PS 2710 –	10	. Dimension Outline						
	TX20D26VM0APA-2		Position changed of Touch Panel.						
	Page 10 – 1/3	Add new traits of upper frame and PCB cover.							
	-								

## 3. GENERAL DATA

## 3.1 DISPLAY FEATURES

This module is a 8" WVGA of 16:9 format amorphous silicon TFT. The pixel format is vertical stripe and sub pixels are arranged as R(red), G(green), B(blue) sequentially. This display is RoHS compliant, and COG (chip on glass) technology and LED backlight are applied on this display.

Part Name	TX20D26VM0APA
Module Dimensions	190.0(W) mm x 121.26(H) mm x 14.3(D) mm typ.(Excluding Fixing Parts)
LCD Active Area	174.0(W) mm x 104.4(H) mm
Dot Pitch	0.0725(W) mm x 3(R, G, B)(W) x 0.2175(H) mm
Resolution	800 x 3(RGB)(W) x 480(H) dots
Color Pixel Arrangement	R, G, B Vertical stripe
LCD Type	Transmissive Color TFT; Normally Black
Display Type	Active Matrix
Number of Colors	262k Colors
Backlight	7 LEDs parallel x 4 serial (28 LEDs in total)
Weight	440 g (typ.)
Interface	C-MOS; 6-bit RGB; 40 pins
Power Supply Voltage	3.3V for LCD; 21.7V for Backlight
Power Consumption	1.32 W for LCD; 8.68W for backlight
Viewing Direction	Super Wide Version (In Plane Switching)
Touch Panel	Resistive type ; Film on Glass ; 4-wire type ; Antiglare Surface

## 4. ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit	Remarks
Supply Voltage	VDD	-0.3	4.0	<b>V</b>	-
Input Voltage of Logic	VI	-0.3	VDD+0.3	V	Note 1
Operating Temperature	Тор	-20	70	°C	Note 2
Storage Temperature	Tst	-30	80	°C	Note 2
Backlight Input Voltage	VLED	-	26.6	٧	-
	ILED	-	180	mA	-

- Note 1: The rating is defined for the signal voltages of the interface such as DE, DCLK and RGB data bus.
- Note 2: The maximum rating is defined as above based on the temperature on the panel surface, which might be different from ambient temperature after assembling the panel into the application. Moreover, some temperature-related phenomenon as below needed to be noticed:
  - Background color, contrast and response time would be different in temperatures other than  $25\,^{\circ}\mathrm{C}\,.$
  - Operating under high temperature will shorten LED lifetime.

## 5. ELECTRICAL CHARACTERISTICS

### 5.1 LCD CHARACTERISTICS

 $T_a = 25 \, ^{\circ}C, \, \text{VSS} = 0\text{V}$ 

Item	Symbol	Condition	Min.	Тур.	Max.	Unit	Remarks
Power Supply Voltage	VDD	-	2.97	3.3	3.6	V	-
Input Voltage of Logic	\ /I	"H" level	0.7VDD	-	VDD+0.3		Note 1
	VI	"L" level	VSS-0.3	-	0.3VDD	V	
Power Supply Current	IDD	VDD=3.3V	-	400	500	mA	Note 2
Vsync Frequency	$f_{v}$	-	47	60	75	Hz	-
Hsync Frequency	$f_{\scriptscriptstyle H}$	-	16.7	31.5	41.7	KHz	-
CLK Frequency	$f_{\it CLK}$	-	25.00	33.26	36.00	MHz	-

Note 1: The rating is defined for the signal voltages of the interface such as DE, DCLK and RGB data bus.

Note 2: An all black check pattern is used when measuring IDD.  $f_v$  is set to 60 Hz.

#### 5.2 BACKLIGHT CHARACTERISTICS

 $T_a=25~^{\circ}C$ 

Item	Symbol	Condition	Min.	Тур.	Max.	Unit	Remarks
LED Input Voltage	VLED	Per Series	-	21.7	26.6	V	Note 1
LED Input Current	ILED	Per Series	-	100	110	mA	-
LED Lifetime	-	400mA	-	70K	-	hrs	Note 2

Note 1: Fig. 5.1 shows the LED backlight circuit. The circuit has 28 LEDs in total. Please keep pin8 $\sim$  pin10 open electrically, Hitachi test use only.

Note 2: The estimated lifetime is specified as the time to reduce 50% brightness by applying 400mA at  $25\,^{\circ}\mathrm{C}$  .




Fig. 5.1

### 6. OPTICAL CHARACTERISTICS

The optical characteristics are measured based on the conditions as below:

- Supplying the signals and voltages defined in the section of electrical characteristics.

 $\phi = 270^{\circ}$ , CR  $\geq 10$ 

- The backlight unit needs to be turned on for 15 minutes.

 $\theta y'$ 

- The ambient temperature is 25°C.

Red

- In the dark room around 500~1000 lx, the equipment has been set for the measurements as shown in Fig 6.1.

Item	Symbol	Condition	Min.	Тур.	Max.	Unit	Remarks
Brightness of White	-	$\phi = 0^{\circ}$ , $\theta = 0^{\circ}$ ,	300	480	-	cd/m <sup>2</sup>	Note 1
Brightness Uniformity	-	ILED= 100	60	70	-	%	Note 2
Contrast Ratio	CR	mA/series	400	600	-	-	Note 3
Response Time (Rising + Falling)	$T_r + T_f$	$\phi = 0^{\circ}, \theta = 0^{\circ}$	-	26		ms	Note 4
	$\theta$ x	$\phi = 0^{\circ}, CR \ge 10$	-	85	-		
Viewing Angle	$\theta x'$	$\phi = 180^{\circ}, CR \ge 10$	-	85	-	Desires	Note 5
	$\theta$ y	$\phi = 90^{\circ}, CR \ge 10$	-	85	-	Degree	Note 5

0.560

85 0.610

0.660


Color Chromaticity		Y		0.270	0.320	0.370		
	Green	X		0.290 0.340 0.390				
		Y	$\phi = 0^{\circ}, \theta = 0^{\circ}$	0.500	0.550	0.600	-	Nata 0
	Blue	X		0.100	0.150	0.200		Note 6
		Υ		0.060	0.110	0.160		
	White	X		0.260	0.310	0.360		
		Y		0.260	0.310	0.360		


Note 1: The brightness is measured from the panel center point, P3 in Fig. 6.2, for the typical value.

Note 2: The brightness uniformity is calculated by the equation as below:

$$Brightness\ uniformity = \frac{Min.\ Brightness}{Max.\ Brightness} \times 100\%$$

, which is based on the brightness values of the 5 points measured by BM-5 as shown in Fig. 6.2.





 $T_a = 25 \, ^{\circ}C, f_v = 60 \, \text{Hz}, \text{VDD} = 3.3 \text{V}$ 

: measuring points

Fig. 6.1 Fig. 6.2

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2706-TX20D26VM0APA-2	PAGE	6-1/2	
--	--------------	-----------------------------	------	-------	--

Note 3: The Contrast Ratio is measured from the center point of the panel, P3, and defined as the following equation:

$$CR = \frac{Brightness of White}{Brightness of Black}$$

Note 4: The definition of response time is shown in Fig. 6.3. The rising time is the period from 10% brightness to 90% brightness when the data is from black to white. Oppositely, falling time is the period from 90% brightness rising to 10% brightness.




Fig 6.3

Note 5: The definition of viewing angle is shown in Fig. 6.4. Angle  $\phi$  is used to represent viewing directions, for instance,  $\phi = 270^{\circ}$  means 6 o'clock, and  $\phi = 0^{\circ}$  means 3 o'clock. Moreover, angle  $\theta$  is used to represent viewing angles from axis Z toward plane XY.

The display is super wide viewing angle version, so that the best optical performance can be obtained from every viewing direction.


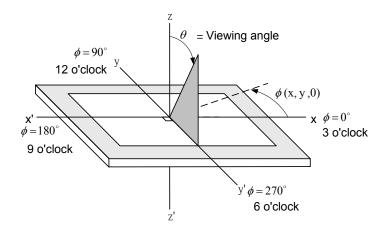


Fig 6.4

Note 6: The color chromaticity is measured from the center point of the panel, P3, as shown in Fig. 6.2.

## 7 BLOCK DIAGRAM

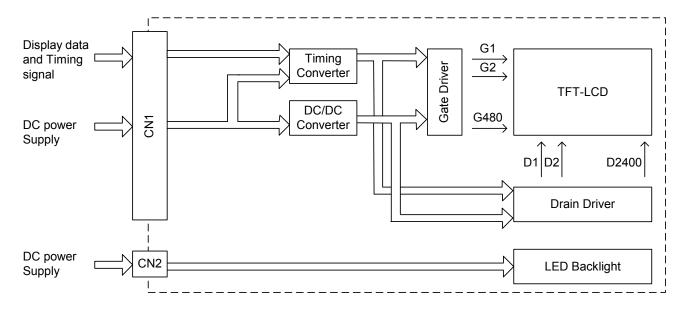

## 8. RELIABILITY TESTS

Test Item	Condition			
High Temperature	1) Operating 2) $70 ^{\circ}\mathrm{C}$	240 hrs		
Low Temperature	1) Operating 2) -20 °C	240 hrs		
High Temperature	1) Storage 2) 80 °C	240 hrs		
Low Temperature	1) Storage 2) -30 °C	240 hrs		
Heat Cycle	1) Operating 2) -20 °C ~70 °C 3) 3hrs~1hr~3hrs	240 hrs		
Thermal Shock	1) Non-Operating mal Shock 2) -35 ° C ↔ 85 ° C 3) 0.5 hr ↔ 0.5 hr			
High Temperature & Humidity	1) Operating 2) 40 °C & 85%RH 3) Without condensation 4) Note 4	240 hrs		
Vibration	1) Non-Operating 2) 20~200 Hz 3) 2G 4) X, Y, and Z directions	1hr for each direction		
Mechanical Shock	1) Non-Operating			
ESD	1) Operating 2) Tip: 200 pF, 250 $\Omega$ 3) Air discharge for glass: $\pm$ 8KV 4) Contact discharge for metal frame: $\pm$ 8KV	1) Glass: 9 points 2) Metal frame: 8 points 3) Note 3		

- Note 1: Display functionalities are inspected under the conditions defined in the specification after the reliability tests.
- Note 2: The display is not guaranteed for use in corrosive gas environments.
- Note 3: All pins of LCD interface (CN1) have been tested by  $\pm$  100V contact discharge of ESD under non-operating condition.
- Note 4: Under the condition of high temperature & humidity, if the temperature is higher than  $40\,^{\circ}\text{C}$ , the humidity needs to be reduced as Fig. 8.1 shown.




Fig. 8.1

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2708-TX20D26VM0APA-2	PAGE	8-1/1	
--	--------------	-----------------------------	------	-------	--

## 9. LCD INTERFACE

### 9.1 INTERFACE PIN CONNECTIONS

The display interface connector is 40FLZ-SM2-R-GB-TB(LF)(SN) made by JST (Thickness:  $0.3\pm0.05$ mm; Pitch:  $0.5\pm0.05$ mm) and more details of the connector are shown in the section of outline dimension.

Pin assignment of LCD interface is as below:

Pin No.	Signal	Function	Pin No.	Signal	Function			
1	VSS	GND	21	В3				
2	DCLK	Dot Clock	22	B4	Blue Data			
3	VSS	GND	23	B5				
4	R0		24	VSS	GND			
5	R1		25	NC	No Connection			
6	R2	Red Data	26	DE	Data Enable			
7	R3	Red Data	27	NC	No Connection			
8	R4		28	VSS	GND			
9	R5		29	NC				
10	VSS	GND	30	NC	No Connection			
11	G0		31	NC	No Connection			
12	G1		32	NC				
13	G2		33	VSS	GND			
14	G3	Green Data	34	VSS	GND			
15	G4		35	Reset	Reset of timing controller			
10	O <del>4</del>		33	110301	(Low=Reset)			
16	G5		36	VDD				
17	VSS	GND	37	VDD	Power Supply for Logic			
18	В0		38	VDD				
19	B1	Blue Data	39	VSS	GND			
20	B2		40	VSS	GIND			

Note 1: All VDD pins shall be connected to +3.3V, and VSS pins shall be grounded.


The backlight connector (CN2) is 10pin-0.5mm pitch and pin assignment is as below:

Pin No.	Symbol	Description
1	VLA	Anode Chain1(+)
2	VLA	Anode Chain2(+)
3	VLA	Anode Chain3(+)
4	VLC1	Cathode Chain1(-)
5	VLC2	Cathode Chain2(-)
6	VLC3	Cathode Chain3(-)
7	VLC4	Cathode Chain4(-)
8	(IC)	Note 1
9	(IC)	Note 1
10	(IC)	Note 1

Note 1: Please keep open electrically, Hitachi test use only.

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2709-TX20D26VM0APA-2	PAGE	9-1/5	
--	--------------	-----------------------------	------	-------	--

## 9.2 TIMING CHART

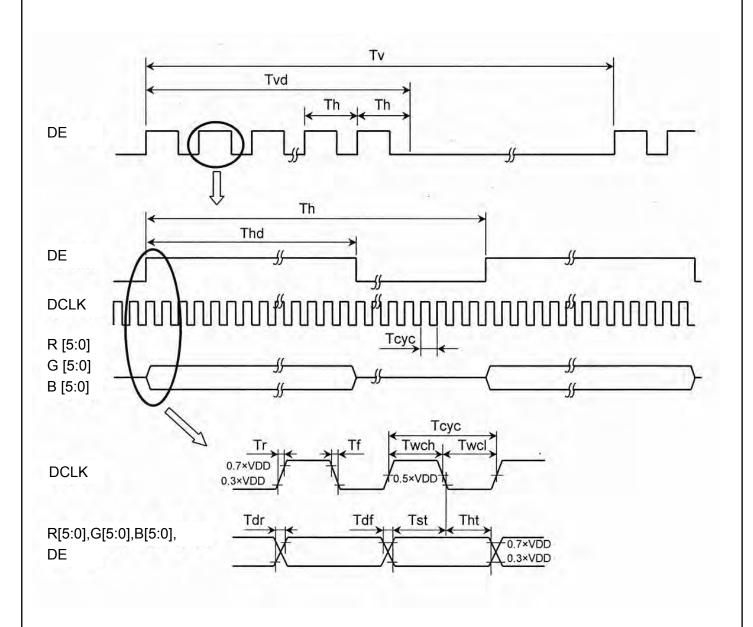

### 9.3 INTERFACE TIMING SPECIFICATIONS

The parameter sets including minimum, typical, and maximum column as below are based on frame frequency (Vsync) = 60 Hz and 50Hz to adjust timing. In order to obtain better optical performance,  $47\sim75 \text{ Hz}$  for Vsync should be applied at least by other parameter combination if 60 Hz and 50Hz are not the aim to set.


### AC characteristic(60Hz)

Item		Symbol	Min.	Тур.	Max.	Unit
	Frequency	1/Tcyc	30.00	33.26	36.00	M Hz
	High Width	Twch	8	-	-	
DCLK	Low Width	Twcl	8	1	-	
DCLK	Rise Time	Tr	-	1	4	ns
	Fall Time	Tf	-	1	4	
	Duty(D=Twcl / Twch)	D	0.45	0.50	0.55	-
	Set Up Time	Tst	4	1	-	
	Hold Time	Tht	4	1	-	
	Rise Time	Tdr	-	1	4	ns
R,G,B	Fall Time	Tdf	-	-	4	
DE	Horizontal Cycle Time	Th	840	1,056	1,500	Tours
	Horizontal Active Width	Thd	800	800	800	Тсус
	Vertical Cycle Time	Tv	482	525	640	Th
	Vertical Active Width	Tvd	480	480	480	Th

## AC characteristic(50Hz)

	Item	Symbol	Min.	Тур.	Max.	Unit
	Frequency	1/Tcyc	25.00	33.00	36.00	M Hz
	High Width	Twch	8	-	-	
DCLK	Low Width	Twcl	8	-	-	20
DCLK	Rise Time	Tr	-	-	4	ns
	Fall Time	Tf	-	-	4	
	Duty(D=Twcl / Twch)	D	0.45	0.50	0.55	-
	Set Up Time	Tst	4	-	-	
	Hold Time	Tht	4	-	-	
	Rise Time	Tdr	-	-	4	ns
R,G,B	Fall Time	Tdf	-	-	4	
DE	Horizontal Cycle Time	Th	840	1,056	1,500	Tayra
	Horizontal Active Width	Thd	800	800	800	Тсус
	Vertical Cycle Time	Tv	482	525	640	Th
	Vertical Active Width	Tvd	480	480	480	Th

### 9.4 POWER SEQUENCE

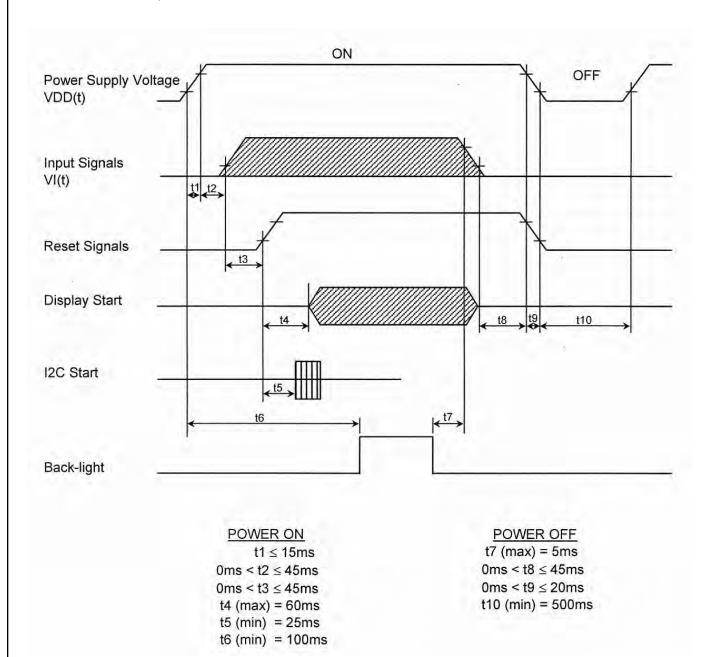


Note 1: Set 0V  $\leq$ VI (t)  $\leq$ VDD (t)


Here, VI(t), VDD(t) indicate the transitional state of VI, VDD when power supply is turned ON or OFF.

Note 2: Do not keep interface signal high-impedance when power on.


## 9.5 DATA INPUT for DISPLAY COLOR

	COLOR & Gray Scale								Ι	Data	Signa	al							
	Gray Scale	R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	В3	B2	B1	B0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (0)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green (0)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Basic	Blue (0)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Color	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (62)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red (61)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
Red	•		• •	• •	٠.		:	:	• •	:	• •		• •	• •	:	:	•	:	:
	:		:	:	:	:	:	:	:	:		:		:		:	:	:	:
	Red (1)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (0)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (62)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Green (61)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
Green	•	:		:	• •	:	:	:	:	:	:	:	:	• •	:	:	:	:	:
	•	:	• •	:	• •	:	:	:	• •	:	:	:	:	• •	:	:	:	:	:
	Green (1)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	Green (0)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue (62)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue (61)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Blue	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue (1)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue (0)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

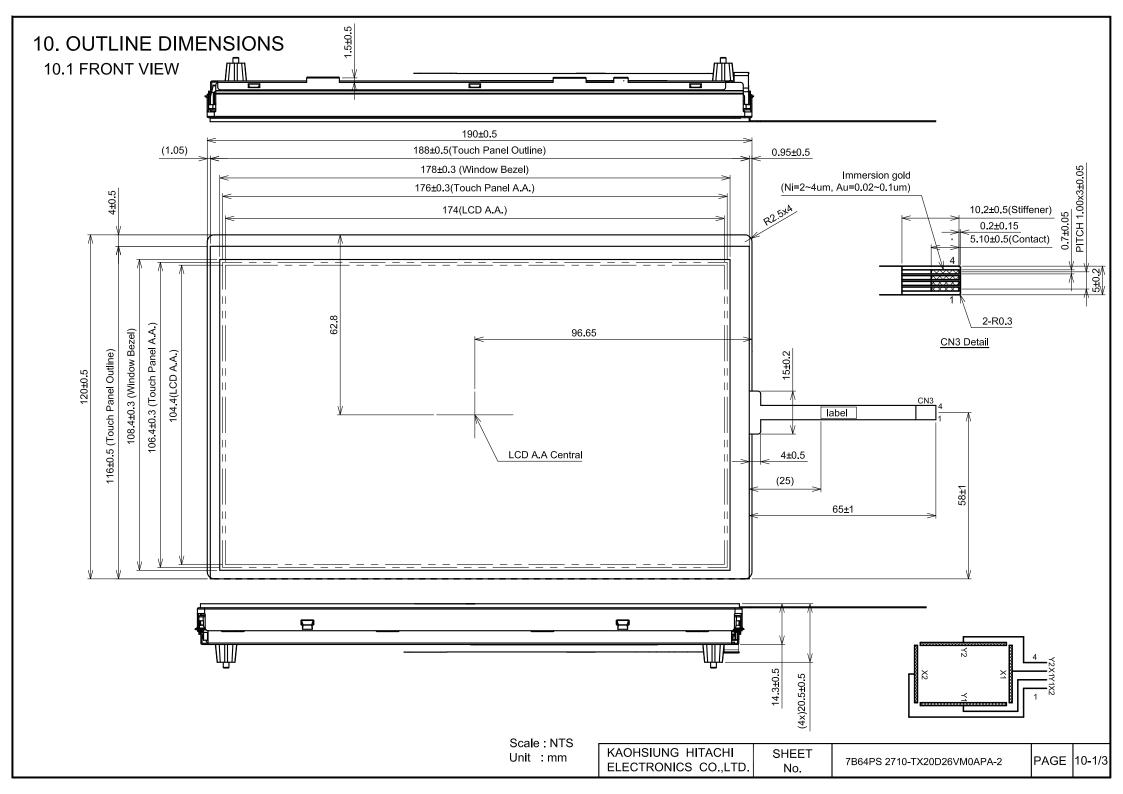

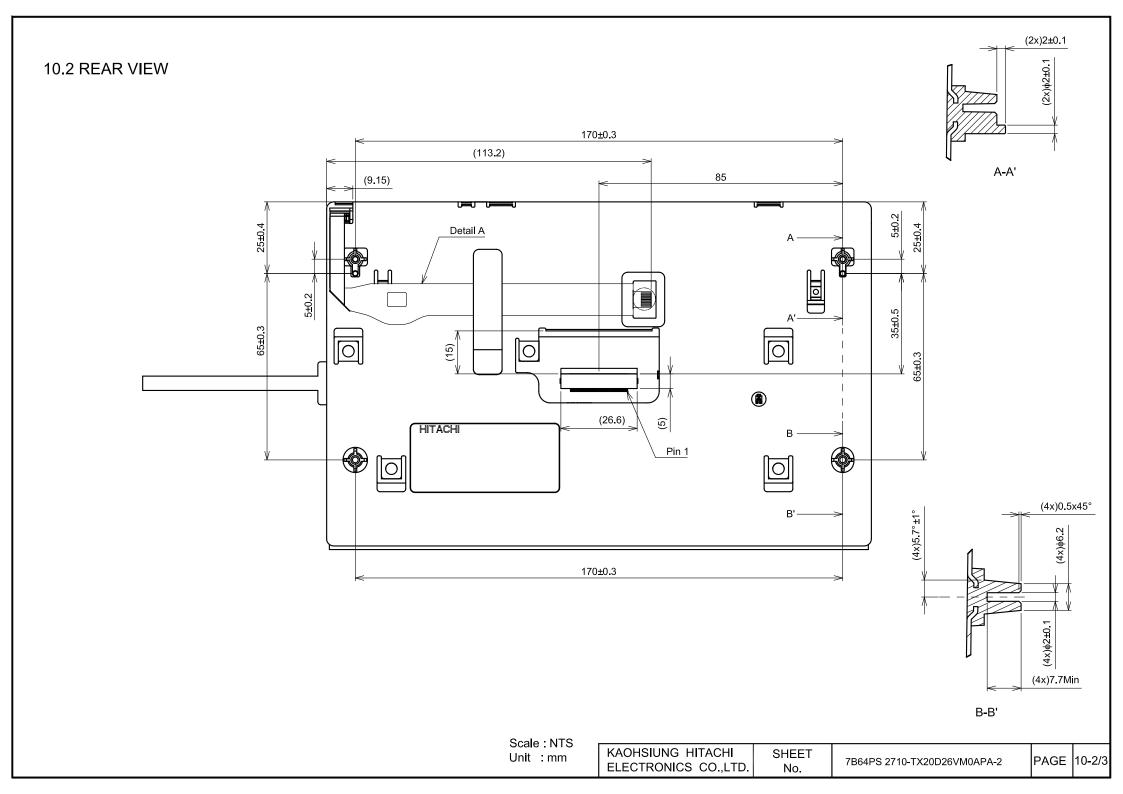



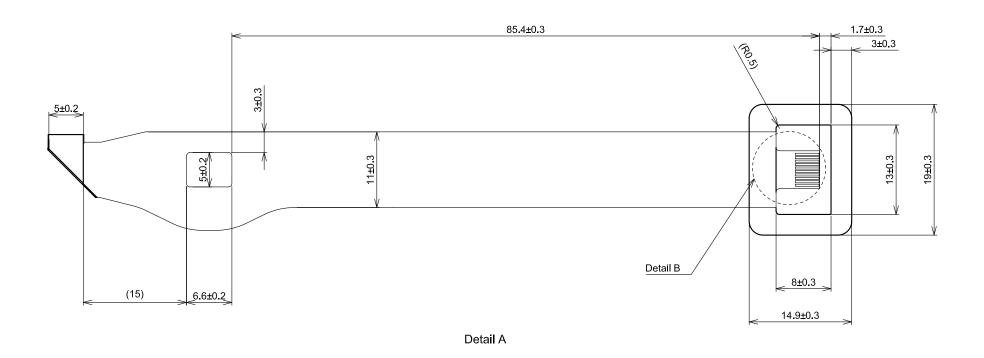

Scale : NTS Unit : mm

KAOHSIUNG HITACHI ELECTRONICS CO.,LTD. SHEET No.

7B64PS 2710-TX20D26VM0APA-2

PAGE 10-3/3

## 11. TOUCH PANEL

The type of touch panel used on this display is resistive, analog, 4-wire and film on glass, and more characteristics are shown as below:

#### 11.1 OPERATING CONDITIONS

Item	Specification	Remarks
Operating Voltage	5VDC	-

#### 11.2 ELECTRICAL CHARACTERISTICS

Item		Specification	Remarks
Resistance	X1-X2	<b>380~1010</b> Ω	
Between Terminal	Y1-Y2	<b>180~520</b> Ω	_
Insulation Resistance	X-Y	<b>20M</b> $\Omega$ min.	At 25V DC
Lincovity	X	±1.5% max.	Note 4
Linearity	Y	±1.5% max.	Note 1
Chattering		10ms max.	-

Note 1: The test conditions and equipments of linearity are as below:

- Material of pen: poly-acetal resin

- End shape: R 0.8 mm

- Test force: 150 gf

- Pitch: 10 mm

- Test area is shown in Fig. 11.1




Fig. 11.1




Fig. 11.2

As shown in Fig. 11.2, applying voltage meter to measure Va, Vb and Vxm, where Va is the maximum voltage in the active area; Vb is the minimum voltage in the active area; Vxm is the measured voltage of point x selected by random. Afterwards, the linearity can be calculated by following equation:

$$Linearity = \frac{\left| Vxi - Vxm \right|}{Va - Vb} \times 100\%,$$

where Vxi is the idea voltage of point x.

The method to measure the linearity of Y-axis is the same as above.

KAOHSIUNG HITACHI	SHEET			
ELECTRONICS CO., LTD.	NO.	7B64PS 2711-TX20D26VM0APA-2	PAGE	11-1/2
			!	

#### 11.3 MECHANICAL CHARACTERISTICS

Item	Specification	Remarks
Pen Input Pressure	5 ~ 80gf	R0.8, Polyacetal Pen
Finger	5 ~ 80gf	R8.0, Silicon Rubber
Surface Hardness	3H min.	JIS K 5400

#### 11.4 OPTICAL CHARACTERISTICS

Item	Specification	Remarks	
Transmittance	80% min.	<del>-</del>	

### 11.5 SAFETY AND ATTENTIONS

- 1) Do not put heavy shock or stress on the touch panel.
- 2) Please use soft cloth or absorbent cotton with ethanol to clean the touch panel by gently wiping. Moreover, please wipe it by horizontal or vertical direction instead of circling to prevent leaving scars on the touch panel's surface.
- 3) Do not use any harmful chemicals such as acetone, toluene, and isopropyl alcohol to clean the display's surface.

## 12. APPEARANCE STANDARD

The appearance inspection is performed in a dark room around 2000 lx based on the conditions as below:

- The distance between inspector's eyes and display is 30 cm.
- The viewing zone is defined with angle  $\theta$  shown in Fig. 12.1 The inspection should be performed within 45° when display is shut down. The inspection should be performed within 5° when display is power on.




Fig 12.1

#### 12.1 THE DEFINITION OF LCD ZONE

LCD panel is divided into 3 areas as shown in Fig.12.2 for appearance specification in next section. A zone is the LCD active area (dot area); B zone is the area, which extended 1 mm out from LCD active area; C zone is the area between B zone and metal frame.

In terms of housing design, B zone is the recommended window area customers' housing should be located in.

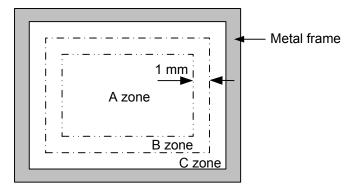



Fig 12.2

## 12.2 LCD APPEARANCE SPECIFICATION

The specification as below is defined as the amount of unexpected phenomenon or material in different zones of LCD panel. The definitions of length, width and average diameter using in the table are shown in Fig. 12.3 and Fig. 12.4.


Item	Criteria				Applied zone			
	Length (mm)	Width	/idth (mm) Maximum nu		ımber	Minimum space		
	Ignored	W≦	<u>0.01</u>	Ignored	d	-		
	L≦40	W≦	<u>0.02</u>	10		-		
Caratabaa	L≦20	W≦	<u>0.04</u>	10		-	۸	
Scratches			Round ([	Oot Shape)			Α	
	Average diameter (n	nm)	Maxim	Maximum number		nimum space		
	D≦0.2		I	gnore	nore -			
	D≦0.4			10	-			
Dent		Se	erious one	is not allowed			Α	
Wrinkles in polarizer		Se	erious one	is not allowed			Α	
	Average diame	ter (m	nm)	Мах	imum n	ıumber		
Bubbles on polarizer	D≦0.3				Ignore	ed	Α	
Dubbles on polarizer	D≦0.5				10		^	
	D≦1.0				5			
		Fila	amentous	(Line shape)				
	Length (mm)		Widt	th (mm) Max		imum number		
	Ignored		W≦	<b>_0.02</b>	Ignored		Α	
	L≦2.0		W≦	<b>6</b> 0.03	10			
1) Stains	L≦1.0		W≦0.06		10			
2) Foreign Materials	Round (Dot shape)							
3) Dark Spot	Average diameter (mr	diameter (mm) Max		m number	Min	imum Space		
o Bark opot	D≦0.22		lgr	ored	-			
	D≦0.33			5		-	Α	
	D>0.33			0		-		
	In total			Filamentous +				
	Т	hose	wiped out e	easily are accept	able			
			Т	ype	Max	imum number		
				dot		4		
Dot-Defect (Note 1)	Bright dot-defect		2 adjacent dot		1		A	
			3 adjacent dot or above		ve Not allowed			
			Density		2(φ 20mm)			
			In total		5			
	Dark dot-defect		1 dot		5		,,	
			2 adjacent dot		2			
			3 adjacent dot or above		Not allowed			
			Density		3(φ 20mm)			
			In total		5			
	In total 10				10			

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2712-TX20D26VM0APA-2	PAGE	12-2/4	
--	--------------	-----------------------------	------	--------	--



Note 1: The defi nitions of dot defect are as below:

- The defect area of the dot must be bigger than half of a dot.
- For bright dot-defect, showing black pattern, the dot's brightness must be over 30% brighter than others.
- For dark dot-defect, showing white pattern, the dot's brightness must be under 70% darker than others.
- The definition of 1-dot-defect is the defect-dot, which is isolated and no adjacent defect-dot.
- The definition of adjacent dot is shown as Fig. 12.5.
- The Density of dot defect is defined in the area within diameter  $\phi$  =20mm.



## 12.3 TOUCH PANEL APPEARANCE SPECIFICATION

The specification as below is defined by the amount of unexpected material in different zones of touch panel.

Item	Criteria			Applied zone		
	Width (mm)	Length	n (mm)	Maximum number		
Scratches	W>0.1	L≧	<sub>≧</sub> 10	Not allowed	A	
Scratches	$0.10 \ge W > 0.05$	L<	〔10	4 pcs max.		
	0.05≧W	L<	〔10	Ignored		
	Fi	ilamentous	(Line shap	e)		
	Width (mm)	Length (mm)		Maximum number	A	
	$0.10 \ge W > 0.05$	3 <l< td=""><td>Not allowed</td><td colspan="2">^</td></l<>		Not allowed	^	
	0.05≧W	L≦3		Ignored		
Foreign Materials		Round (D	ot shape)			
Foreign waterials	Average diameter	(mm)	Maximum number			
	D>0.3		Not allowed		А	
$ \begin{array}{c c} 0.3 \ge D > 0.2 \\ \hline 0.2 \ge D > 0.1 \end{array} $		2		3 pcs max.		
		5		5 pcs max.		
	0.1≧D		Ignored			
	D≦0.5mm			Ignored	В	

The limitation of glass flaw occurred on touch panel is defined in the table as below.

Item	Specifications		
Edge flaw	X	$X \le 3.0 \text{ mm}$ $Y \le 3.0 \text{ mm}$ $Z \le \text{Thickness}$	
Corner flaw	Z Z Z Z	$X \leq 3.0 \text{ mm}$ $Y \leq 3.0 \text{ mm}$ $Z \leq \text{Thickness}$	
Progressive flaw		Not allowed	

## 13. PRECAUTIONS

#### 13.1 PRECAUTIONS of MOUNTING

- 1) Please refer to Fig. 13.1 for housing the display with touch panel into applications. The Fig. 13.1 shows some points as below:
- The cushion needs to be designed between housing and touch panel in order to avoid unexpected pressure to cause any wrong reactions, and the cushion should be located in the insulated area.
- The housing should not cover the active area of touch panel as the figure shown.

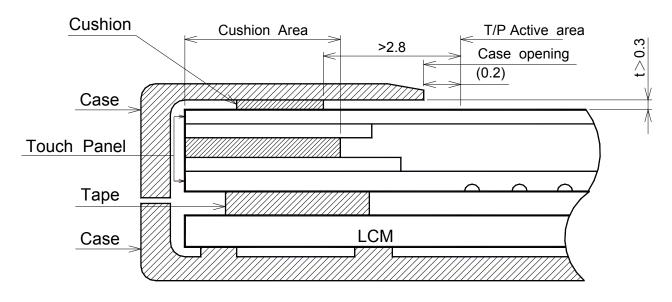


Fig 13.1

#### 13.2 PRECAUTIONS of ESD

- 1) Before handling the display, please ensure your body has been connected to ground to avoid any damages by ESD. Also, do not touch display's interface directly when assembling.
- 2) Please remove the protection film very slowly before turning on the display to avoid generating ESD.

### 13.3 PRECAUTIONS of HANDLING

- 1) In order to keep the appearance of display in good condition, please do not rub any surfaces of the displays by sharp tools harder than 3H, especially touch panel, metal frame and polarizer.
- 2) Please do not pile the displays in order to avoid any scars leaving on the display. In order to avoid any injuries, please pay more attention for the edges of glasses and metal frame, and wear finger cots to protect yourself and the display before working on it.
- 3) Touching the display area or the terminal pins with bare hand is prohibited. This is because it will stain the display area and cause poor insulation between terminal pins, and might affect display's electrical characteristics furthermore.
- 4) Do not use any harmful chemicals such as acetone, toluene, and isopropyl alcohol to clean display's surfaces.
- 5) Please use soft cloth or absorbent cotton with ethanol to clean the display by gently wiping. Moreover, when wiping the display, please wipe it by horizontal or vertical direction instead of circling to prevent leaving scars on the display's surface, especially polarizer.

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2713-TX20D26VM0APA-2	PAGE	13-1/2
--	--------------	-----------------------------	------	--------

- 6) Please wipe any unknown liquids immediately such as saliva, water or dew on the display to avoid color fading or any permanently damages.
- 7) Maximum pressure to the surface of the display must be less than  $1.96 \times 10^4$  Pa. If the area of adding pressure is less than  $1 \text{ cm}^2$ , the maximum pressure must be less than 1.96N.

#### 13.4 PRECAUTIONS OF OPERATING

- 1) Please input signals and voltages to the displays according to the values defined in the section of electrical characteristics to obtain the best performance. Any voltages over than absolute maximum rating will cause permanent damages to this display. Also, any timing of the signals out of this specification would cause unexpected performance.
- 2) When the display is operating at significant low temperature, the response time will be slower than it at 25 °C. In high temperature, the color will be slightly dark and blue compared to original pattern. However, these are temperature-related phenomenon of LCD and it will not cause permanent damages to the display when used within the operating temperature.
- 3) The use of screen saver or sleep mode is recommended when static images are likely for long periods of time. This is to avoid the possibility of image sticking.
- 4) Spike noise can cause malfunction of the circuit. The recommended limitation of spike noise is no bigger than  $\pm 100$  mV.


#### 13.5 PRECAUTIONS of STORAGE

If the displays are going to be stored for years, please be aware the following notices.

- 1) Please store the displays in a dark room to avoid any damages from sunlight and other sources of UV light.
- 2) The recommended long term storage temperature is between 10 °C ~35 °C and 55%~75% humidity to avoid causing bubbles between polarizer and LCD glasses, and polarizer peeling from LCD glasses.
- 3) It would be better to keep the displays in the container, which is shipped from Hitachi, and do not unpack it.
- 4) Please do not stick any labels on the display surface for a long time, especially on the polarizer.

## 14. DESIGNATION of LOT MARK

1) The lot mark is showing in Fig.14.3. First 4 digits are used to represent production lot, T represented made in Taiwan, and the last 5 digits are the serial number.

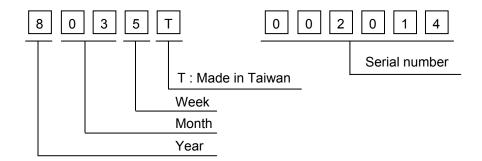

2) The tables as below are showing what the first 4 digits of lot mark are shorted for.

Year	Mark
2009	9
2010	0
2011	1
2012	2
2013	3

Month	Mark	Month	Mark
1	01	7	07
2	02	8	80
3	03	9	09
4	04	10	10
5	05	11	11
6	06	12	12

Week (Days)	Mark
1~7	1
8~14	2
15~21	3
22~28	4
29~31	5

- 3) Except letters I and O, revision number will be showen on lot mark and following letters A to Z.
- 4) The location of the lot mark is on the back of the display shown in Fig. 14.3.



Fig 14.3