

SPEC

Spec No.	TQ3C-8EA00-E1BYD02-01
Date	July 10, 2009

TYPE : KTP150AGAC-C00
< Touch panel >

CONTENTS

1. Application
2. Construction and outline
3. Mechanical specifications
4. Absolute maximum ratings
5. Electrical characteristics
6. Interface signals
7. Design guidance for analog touch-panel
8. Lot number identification
9. Warranty
10. Precautions for use
11. Reliability test data
12. Outline drawing

Prototype

Issued
Date: Jul 10, 2009
 **KYOCERA**
Hayato LCD Division

KYOCERA CORPORATION
KAGOSHIMA HAYATO PLANT
LCD DIVISION

This specification is subject to change without notice.
Consult Kyocera before ordering.

Original Issue Date	Designed by: Engineering dept.			Confirmed by: QA dept.	
	Prepared	Checked	Approved	Checked	Approved
June 24, 2009	<i>S. Ohtaka</i>	<i>W. Yano</i>	<i>M. Fujitani</i>	<i>J. Sakaguchi</i>	<i>To. Itoh</i>

Warning

1. This Kyocera touch panel has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the touch panel in such applications.
2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs, and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera touch panels in applications.

Caution

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera touch panels for which no Purchase Orders have been received from the Customer in a two-year period.

Spec No. TQ3C-8EA00-E1BYD02-01	Part No. KTP150AGAC-C00	Page -
-----------------------------------	----------------------------	-----------

Revision record

Date		Designed by : Engineering dept.			Confirmed by : QA dept.	
		Prepared	Checked	Approved	Checked	Approved
Jul. 10, 2009		<i>S. Ohtaka</i>	<i>W. Yamao</i>	<i>M. Fujitani</i>	<i>J. Sakaguchi</i>	<i>Zo. Iida</i>
Rev.No.	Date	Page	Descriptions			
01	Jul. 10, 2009	1	3-1. Mechanical specifications of touch panel ~Change "Outline dimensions"			
		8	12. Outline drawing ~Change drawing "121A5099700" → "121A5099700-1"			

1. Application

This document defines the specification of KTP150AGAC-C00. (RoHS Compliant)

2. Construction and outline

Touch panel : Analog type(Glass/Glass)
 Surface film : Glare Anti-finger print treatment

3. Mechanical specifications

3-1. Mechanical specifications of touch panel

Item		Specification	Unit
Outline dimensions	1)	319.5 (W)× 243.5 (H) × 2.14 (D)	mm
Active area		305.9 (W) × 229.7 (H)	mm
Viewing area		307.9 (W) × 231.7 (H)	mm
Mass		TBD	g
Input		Radius-0.8 stylus or Finger	-
Actuation Force		0.1~2.0	N
Operating life	Striking(Finger-input) 2)	1 million	hits
	Sliding(Stylus-input) 3)	100 thousand	characters
Transmittance		Typ.80 (at full wavelength)	%
Reflectance		Typ.15(550nm)	%
Surface hardness		2H or more(Pencil hardness)	-

1) Please refer to outline drawing for details.

2) Striking test condition

Testing rod : Silicon rubber (Hardness:60°),Tip : R = 4.0,
 Testing location : In active area
 Input voltage : DC5V
 Load : 2.94N
 Cycle : 5hits/sec
 Judgment : No defect in function
 : No appearance defect which causes trouble to use.
 *Dents, blurs and marks on surface film : neglected

3) Sliding test condition

Testing rod : Polyacetal resin, Tip : R = 0.8
 Testing location : In active area
 Input voltage : DC5V
 Load : 2.45N
 Input length : 10mm
 Input speed : 50mm/sec
 Sliding times : 10mm sliding (back and forth)counts as 2 times.
 Judgment : No defect in function
 : No appearance defect which causes trouble to use.
 *Dents, blurs and marks on surface film : neglected

4. Absolute maximum ratings

4-1. Electrical absolute maximum ratings

Item	Symbol	Min.	Max.	Unit
Supply voltage for touch panel	V _{TP}	0	6.0	V
Input current of touch panel	I _{TP}	0	0.5	V

4-2. Environmental absolute maximum ratings

Item	Symbol	Min.	Max.	Unit
Operating temperature	T _{OP}	-30	85	°C
Storage temperature	T _{STO}	-40	95	°C
Operating humidity 1)	H _{OP}	10	2)	%RH
Storage humidity 1)	H _{STO}	10	2)	%RH
Vibration	-	3)	3)	-
Shock	-	4)	4)	-

1) Non-condensing.

2) Temp. ≤ 40°C, 85%RH Max.

Temp. > 40°C, Absolute humidity shall be less than 85%RH at 40°C.

3) The touch panel is installed on the LCD using two sided tape.

Frequency	10~55 Hz	Acceleration value (0.3~9 m/s ²)
Vibration width	0.15mm	
Interval	10-55-10 Hz	1 minutes

2 hours in each direction X, Y, Z (6 hours total)

EIAJ ED-2531

4) The touch panel is installed on the LCD using two sided tape.

Acceleration: 490 m/s², Pulse width: 11 ms

3 times in each direction: ±X, ±Y, ±Z


EIAJ ED-2531

5. Electrical characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage for touch panel	V_{TP}	-	-	5.0	-	V
Terminal resistance 1)	xL-xR	-	TBD	-	TBD	Ω
	yU-yL	-	TBD	-	TBD	Ω
Linearity 2)	-	-	less than (± 2.5)			%
Insulation resistance 3)	-	DC25V	50	-	-	M Ω
Chattering 4)	-	at ON/OFF	Less than 10			ms


1) Resistance between terminal xL and xR, or between yU and yL

2) Apply 5VDC to the terminal xL-xR, and measure the output voltage at terminal y when a random input is applied in the active area. Measure the difference between the output and theoretical voltages. (Measure the actual voltage at the terminal using the same method.)

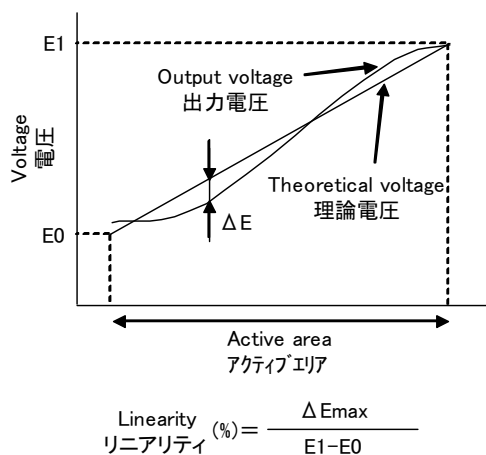

3) Resistance between the upper and lower terminals.

4) Apply 5VDC to the terminal xL-xR, and measure the oscillation at terminal y when applying a random input in the active area. (Measure the oscillation at terminal x using the same method.)

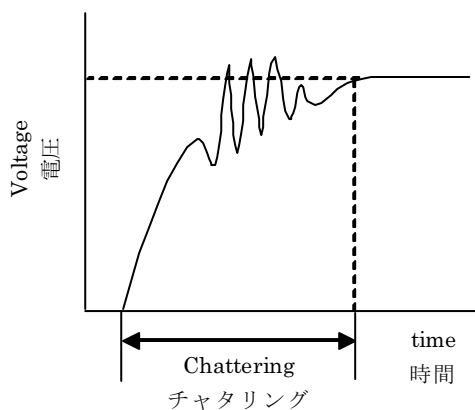

8. Lot number identification

The lot number shall be indicated on the FPC tale.

KTP150AGAC-C00 - □□□□□□□□ □□□

↓ ↓
 1 2

No1. – No2. above indicate
 1. Lot No. 9 digits
 2. Serial 3 digits

9. Warranty

9-1. Incoming inspection

Please inspect the touch panel within one month after your receipt.

9-2. Production warranty

Kyocera warrants its touch panel's for a period of 12 months from the ship date. Kyocera shall, by mutual agreement, replace or re-work defective touch panel's that are shown to be Kyocera's responsibility

Spec No. TQ3C-8EA00-E1BYD02-01	Part No. KTP150AGAC-C00	Page 6
-----------------------------------	----------------------------	-----------

10. Precautions for use

10-1. Usage

- 1) **DO NOT** store in a high humidity environment for extended periods. Surface film degradation bubbles, and/or peeling off of the surface film may result.
- 2) Do not push or rub the touch panel's surface with hard to sharp objects such as knives, or the touch panel may be scratched.
- 3) When the touch panel is dirty, gently wipe the surface with a soft cloth, sometimes moistened by mild detergent or alcohol. If a hazardous chemical is dropped on the touch panel by mistake, wipe it off right away to prevent human contact.
- 4) Touch panel edges are sharp. Handle the touch panel with enough care to prevent cuts.
- 5) Always keep the touch panel free from condensation during testing. Condensation may permanently spot or stain the surface film.
- 6) Do not pull the touch panel FPC and do not bend the root of the wires. Housing should be designed to protect touch panel FPC from external stress.
- 7) This Kyocera touch panel has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the touch panel is supposed to be used in a special environment, evaluate the touch panel thoroughly beforehand and do not expose the touch panel to chemicals such as an active gas.
- 8) The touch panel is made of glass. It may break when dropped, hit, or vibrated excessively. Please handle with care.

10-2. Installation of the touch panel

- 1) The touch panel shall be installed flat, without twisting or bending.
- 2) Please design the housing window so that its edges are between the active area and the effective area of the touch screen. Must maintain a gap between inside of bezel and touch panel to avoid malfunction or electrode damage of touch panel.
- 3) A transparent protection sheet is attached to the touch panel. Please remove the protection film slowly before use, paying attention to static electricity.
- 4) Do not scratch, or put any stress outside the active area of the touch panel when you install it on to an LCD, or it may damage the ITO pattern of the touch panel.

10-3. Operation

- 1) The touch panel shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.
- 2) Do not use the touch panel in environments conducive to the formation of condensation.


10-4. Storage

- 1) The touch panel shall be stored within the temperature and humidity limits specified. Store in a dark area, and protect the touch panel from direct sunlight or fluorescent light.
- 2) Always store the touch panel so that it is free from external pressure onto it. This will prevent the formation of Newton rings.




11. Reliability test data

Test item	Test condition	Test time	Judgement
High temp. atmosphere	(95)°C	240h	Touch panel function : No defect Touch panel quality : No defect Current consumption : No defect
Low temp. atmosphere	(-40)°C	240h	Touch panel function : No defect Touch panel quality : No defect Current consumption : No defect
High temp. humidity atmosphere	(40)°C (90)% RH	240h	Touch panel function : No defect Touch panel quality : No defect Current consumption : No defect
Temp. cycle	(-40)°C 0.5h R.T. 0.5h (95)°C 0.5h	10cycles	Touch panel function : No defect Touch panel quality : No defect Current consumption : No defect
High temp. operation	(85)°C	500h	Touch panel function : No defect Touch panel quality : No defect Current consumption : No defect
Point activation	Silicon rubber R4, Hardness 60° Hitting force 2.9N Hitting speed 5 time/s	one million times	Touch panel function : No defect Terminal resistance : No defect Insulation resistance : No defect Linearity : No defect Actuation Force : No defect No appearance defect which affects touch panel function. 2)
Sliding	Polyacetal resin, Tip : R = 0.8 Hitting force 2.9N Hitting speed 5 time/s	one million times	Touch panel function : No defect Terminal resistance : No defect Insulation resistance : No defect Linearity : No defect Actuation Force : No defect No appearance defect which affects touch panel function. 2)

- 1) Test in active area.
- 2) Dents, blurs and marks on surface film: neglected.
- 3) 10mm sliding (back and forth) counts as 2 times.
- 4) Each test item uses a test touch panel only once. The tested touch panel is not used in any other tests.
- 5) The touch panel is tested in circumstances in which there is no condensation.
- 6) Temp. cycle test (Heat shock included): the LCD shall be tested after leaving it stabilize at room temperature for 2 hours after the last cycle.
- 7) An operational test was performed after the following conditions. First, the touch panel was left for a certain time under 5V voltages applied (without touch), Then it was left at room temperature (No VDC applied) for 2 hours.
- 8) The reliability test is not an out-going inspection.
- 9) The result of the reliability test is for your reference purpose only. The reliability test is conducted only to examine the touch panel's capability.

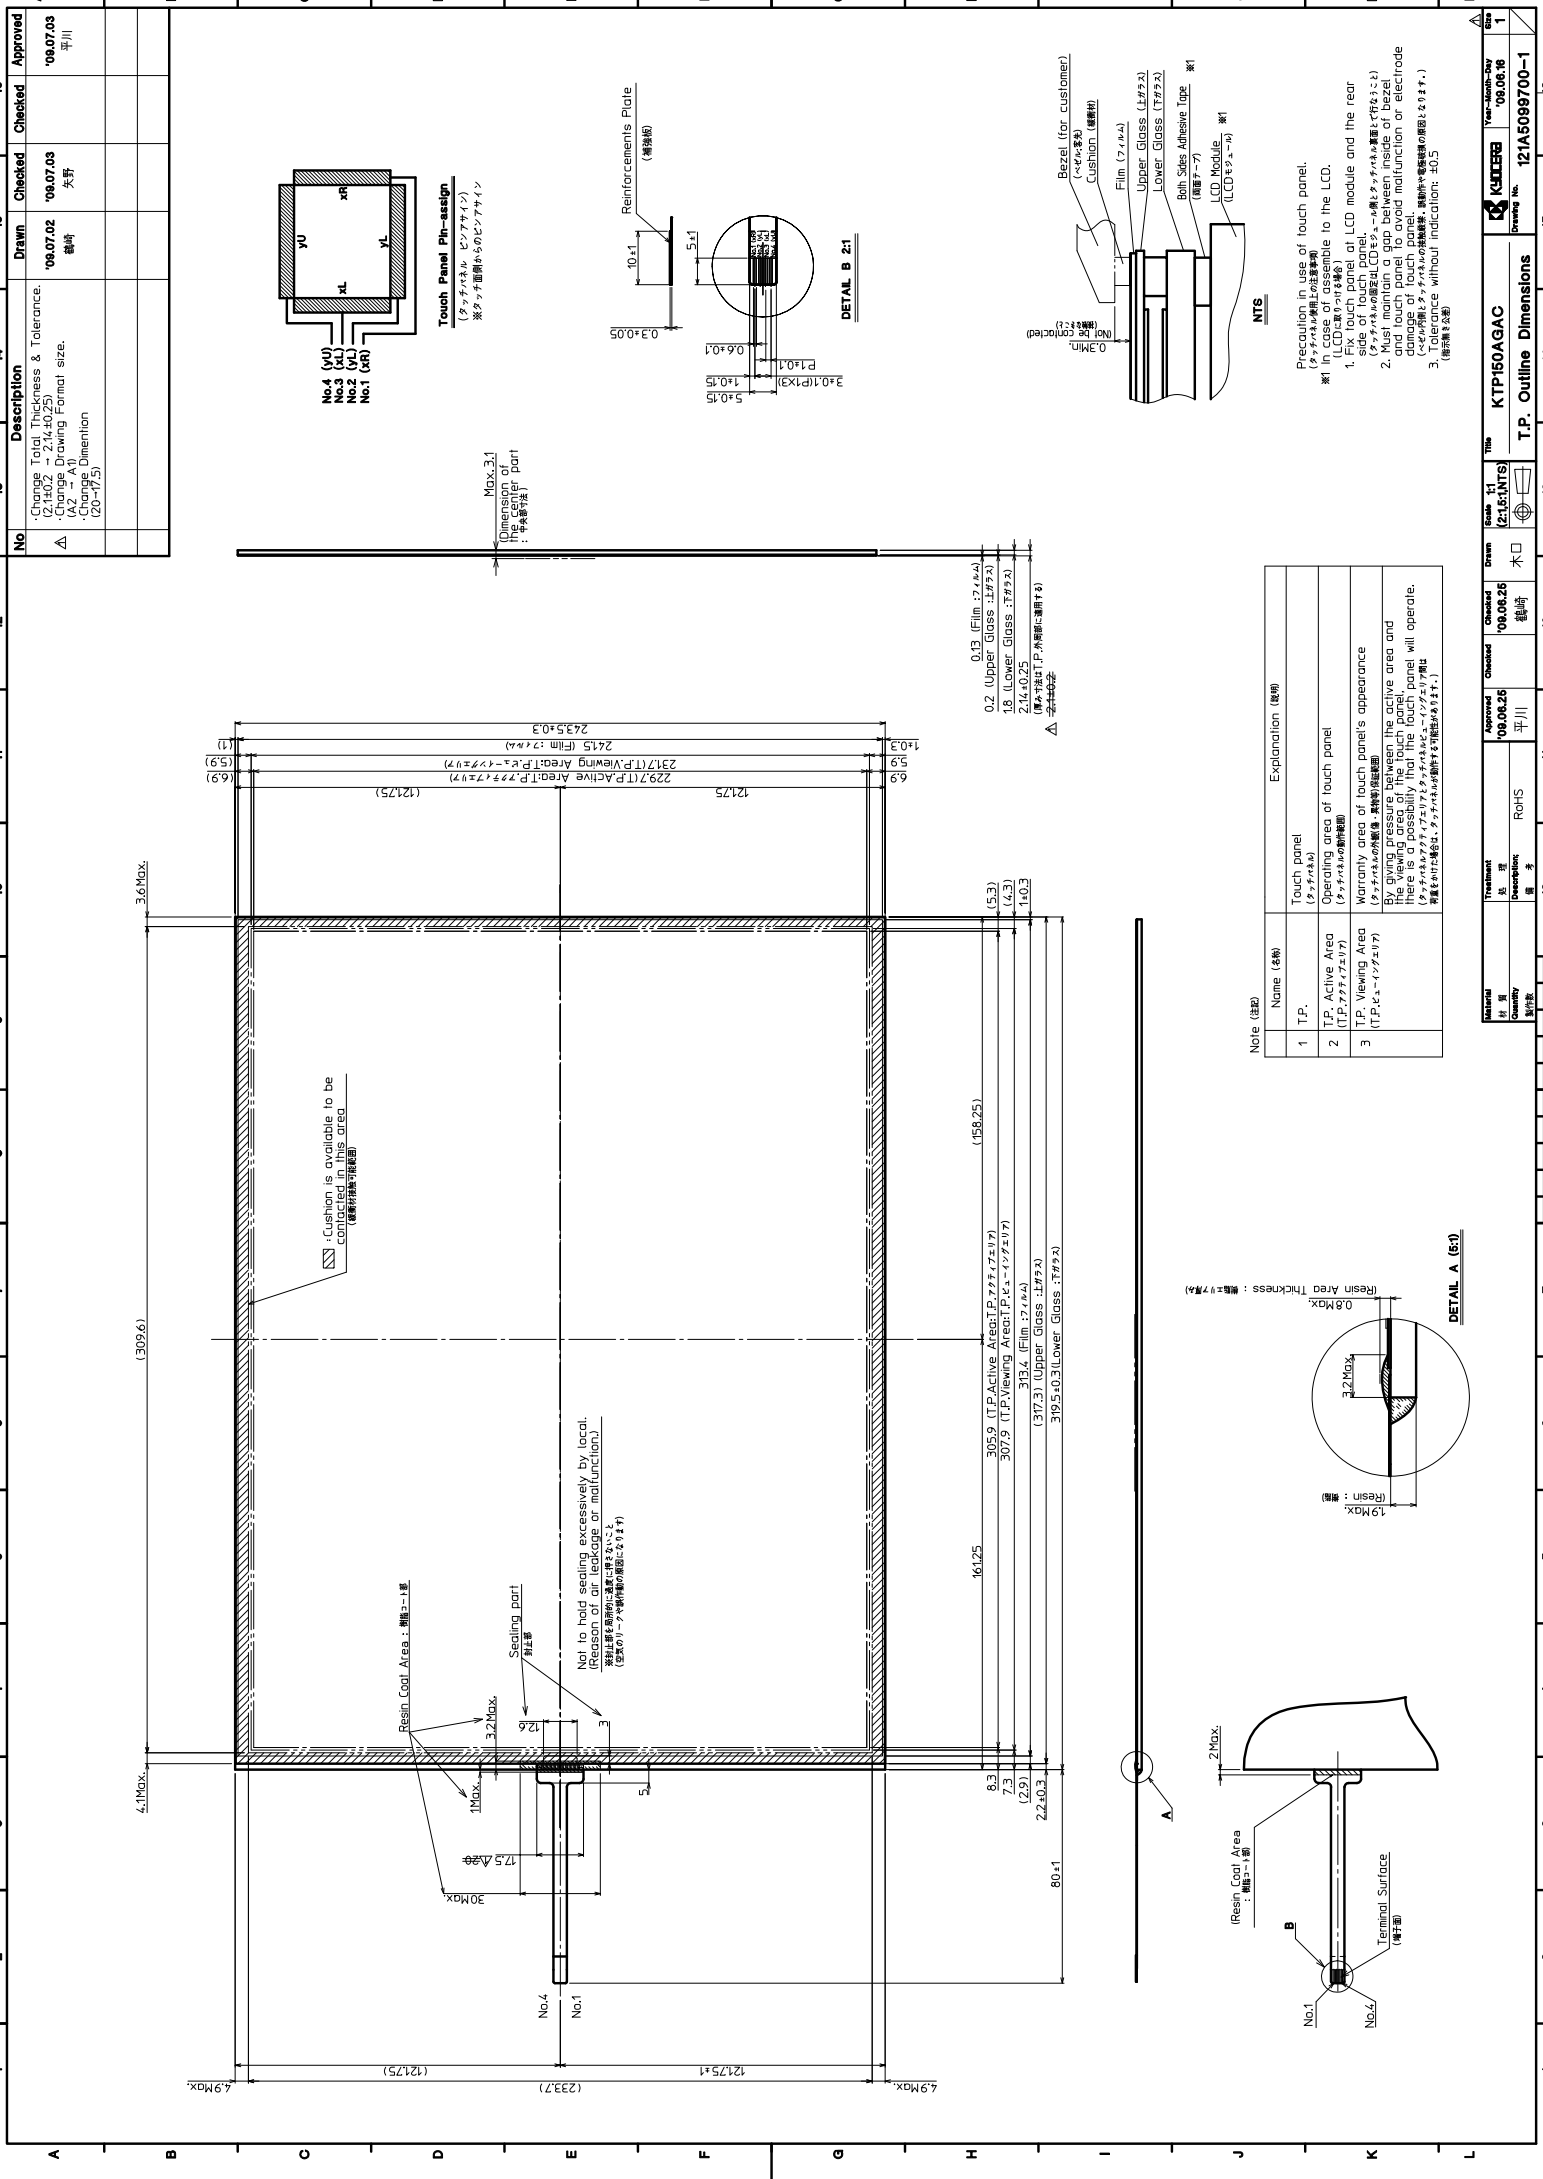

No.	Description	Drawn	Checked	Checked	Approved
△	-Change Total Thickness & Tolerance. (2140.2 → 2144.0±0.25) -Change Drawing Formal size. (A4 → A3) -Change Dimension (20→17.5)	06.07.02 魏崎	06.07.03 矢野	06.07.03 平川	06.07.03 平川

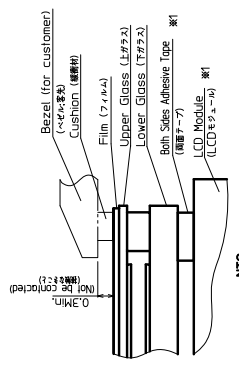

Precaution in use of touch panel.
※1 In case of assembly to the LCD.
(LCDへの組み立て時)
1. Fix touch panel at LCD module and the rear side of bezel.
2. Must maintain a gap between inside of bezel and touch panel to avoid malfunction or electrode damage of touch panel.
3. Tolerance without indication: ±0.5
(無指示公差)

No.	Name (名称)	Explanation (説明)
1	T.P.	Touch panel (タッチパネル)
2	T.P. Active Area (T.P. 有効領域)	Operating area of touch panel (タッチパネルの操作領域)
3	T.P. Viewing Area (T.P. 見出し領域)	Warranty area of touch panel's appearance (タッチパネルの外観保証領域) By giving pressure between the active area and the viewing area of the touch panel, there is a possibility that the touch panel will operate. (有効領域と見出し領域の間を押し付けると、タッチパネルが誤動作する可能性があります。)

Company Name (会社名)	SHIBER
Product Name (製品名)	KTP160AGAC
Version (バージョン)	06.06.16
Drawn (描画)	魏崎
Checked (チェック)	平川
Approved (承認)	平川
Part No. (部品番号)	121A5089700-1

Material (材質)	TP (TP)
Country (国産)	RoHS
Revision (改訂)	06.06.25
Drawn (描画)	魏崎
Checked (チェック)	平川
Approved (承認)	平川
Part No. (部品番号)	121A5089700-1