

**(P) Preliminary Specifications****(V) Final Specifications**

<b>Module</b>	<b>11.6"(11.57") HD 16:9 Color TFT-LCD with LED Backlight design</b>
<b>Model Name</b>	B116XTN04.0 (H/W:1A)
<b>Note</b> (  )	<b><i>LED Backlight with driving circuit design</i></b>

<b>Customer</b>	<b>Date</b>	<b>Approved by</b>	<b>Date</b>
		<u>Kevin Shen</u>	<u>7/15/2013</u>
<b>Checked &amp; Approved by</b>	<b>Date</b>	<b>Prepared by</b>	<b>Date</b>
		<u>Stone SYS</u>	<u>7/15/2013</u>
<b>Note:</b> This Specification is subject to change without notice.		<b>NBBU Marketing Division AU Optronics corporation</b>	



# Product Specification

AU Optronics Corporation

## Contents

<b>1. Handling Precautions .....</b>	<b>4</b>
<b>2. General Description.....</b>	<b>5</b>
2.1 General Specification.....	5
2.2 Optical Characteristics .....	6
<b>3. Functional Block Diagram .....</b>	<b>11</b>
<b>4. Absolute Maximum Ratings .....</b>	<b>12</b>
4.1 Absolute Ratings of TFT LCD Module .....	12
4.2 Absolute Ratings of Environment.....	12
<b>5. Electrical Characteristics.....</b>	<b>13</b>
5.1 TFT LCD Module .....	13
5.2 Backlight Unit.....	15
<b>6. Signal Interface Characteristic .....</b>	<b>16</b>
6.1 Pixel Format Image.....	16
6.2 The Input Data Format.....	17
6.3 Integration Interface Requirement .....	18
6.4 Interface Timing .....	20
<b>7. Panel Reliability Test .....</b>	<b>22</b>
7.1 Vibration Test .....	22
7.2 Shock Test .....	22
7.3 Reliability Test.....	22
<b>8. Mechanical Characteristics .....</b>	<b>23</b>
8.1 LCM Outline Dimension.....	23
<b>9. Shipping and Package .....</b>	<b>25</b>
9.1 Shipping Label Format.....	25
9.2 Carton Package .....	26
9.3 Shipping Package of Palletizing Sequence .....	27
<b>10. Appendix: EDID Description .....</b>	<b>27</b>



# Product Specification

AU Optronics Corporation

## Record of Revision

Version and Date	Page	Old description	New Description	Remark
0.1 2013/04/18	All	First Edition for Customer		-
1.0 2013/07/15			Final Edition for Customer	



# Product Specification

AU Optronics Corporation

## 1. Handling Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open nor modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) After installation of the TFT Module into an enclosure (Notebook PC Bezel, for example), do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Disconnecting power supply before handling LCD modules, it can prevent electric shock, DO NOT TOUCH the electrode parts, cables, connectors and LED circuit part of TFT module that a LED light bar build in as a light source of back light unit. It can prevent electrostatic breakdown.



# Product Specification

AU Optronics Corporation

## 2. General Description

B116XTN04.0 is a Color Active Matrix Liquid Crystal Display composed of a TFT LCD panel, a driver circuit, and LED backlight system. The screen format is intended to support the 16:9 HD, 1366(H) x768(V) screen and 262k colors (RGB 6-bits data driver) with LED backlight driving circuit. All input signals are LVDS interface compatible.

B116XTN04.0 is designed for a display unit of notebook style personal computer and industrial machine.

### 2.1 General Specification

The following items are characteristics summary on the table at 25 °C condition:

Items	Unit	Specifications		
Screen Diagonal	[mm]	293.8		
Active Area	[mm]	256.125 X 144.0		
Pixels H x V		1366x3(RGB) x 768		
Pixel Pitch	[mm]	0.1875 x 0.1875		
Pixel Format		R.G.B. Vertical Stripe		
Display Mode		Normally White		
White Luminance ( $I_{LED}=20mA$ ) <i>(Note: ILED is LED current)</i>	[cd/m <sup>2</sup> ]	200 typ. (5 points average) 170 min. (5 points average)		
Luminance Uniformity		1.25 max. (5 points)		
Contrast Ratio		400 typ		
Response Time	[ms]	8 typ / 16 Max		
Nominal Input Voltage VDD	[Volt]	+3.3 typ.		
Power Consumption	[Watt]	2.65 max. (Include Logic and BLU power)		
Weight	[Grams]	235 max.		
Physical Size <b>Include bracket</b>	[mm]	Min.	Typ.	Max.
		Length	277.5	278.0
		Width	167.5	168.0
		Thickness	-	3.6
Electrical Interface		1 channel LVDS		
Glass Thickness	[mm]	0.5		
Surface Treatment		Anti-Glare, Hardness 3H		
Support Color		262K colors ( RGB 6-bit )		


Temperature Range Operating Storage (Non-Operating)	[°C] [°C]	0 to +50 -20 to +60
RoHS Compliance		RoHS Compliance

## 2.2 Optical Characteristics


The optical characteristics are measured under stable conditions at 25°C (Room Temperature) :

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit	Note
<b>White Luminance</b> $I_{LED}=20mA$		<b>5 points average</b>	170	200	-	$cd/m^2$	1, 4, 5.
<b>Viewing Angle</b>	$\theta_R$	Horizontal (Right) CR = 10 (Left)	40	45	-	degree	4, 9
	$\theta_L$	40	45	-			
<b>Luminance Uniformity</b>	$\phi_H$	Vertical (Upper) CR = 10 (Lower)	10	15	-		
	$\phi_L$	30	35	-			
<b>Luminance Uniformity</b>	$\delta_{5P}$	<b>5 Points</b>	-	-	<b>1.25</b>		1, 3, 4
<b>Luminance Uniformity</b>	$\delta_{13P}$	<b>13 Points</b>	-	-	<b>1.60</b>		2, 3, 4
<b>Contrast Ratio</b>	<b>CR</b>		300	400	-		4, 6
<b>Cross talk</b>	%				<b>4</b>		4, 7
<b>Response Time</b>	$T_{RT}$	<b>Rising + Falling</b>	-	<b>8</b>	<b>16</b>	<b>msec</b>	4, 8
<b>Color / Chromaticity Coordinates</b>	<b>Red</b>	<b>Rx</b>		<b>0.550</b>	<b>0.580</b>	<b>0.610</b>	4
		<b>Ry</b>		<b>0.315</b>	<b>0.345</b>	<b>0.375</b>	
		<b>Gx</b>		<b>0.295</b>	<b>0.325</b>	<b>0.355</b>	
		<b>Gy</b>		<b>0.520</b>	<b>0.550</b>	<b>0.580</b>	
		<b>Bx</b>		<b>0.125</b>	<b>0.155</b>	<b>0.185</b>	
		<b>By</b>		<b>0.110</b>	<b>0.140</b>	<b>0.170</b>	
		<b>Wx</b>		<b>0.283</b>	<b>0.313</b>	<b>0.343</b>	
		<b>Wy</b>		<b>0.299</b>	<b>0.329</b>	<b>0.359</b>	
<b>NTSC</b>	%		-	<b>45</b>	-		

**Note 1:** 5 points position (Ref: Active area)

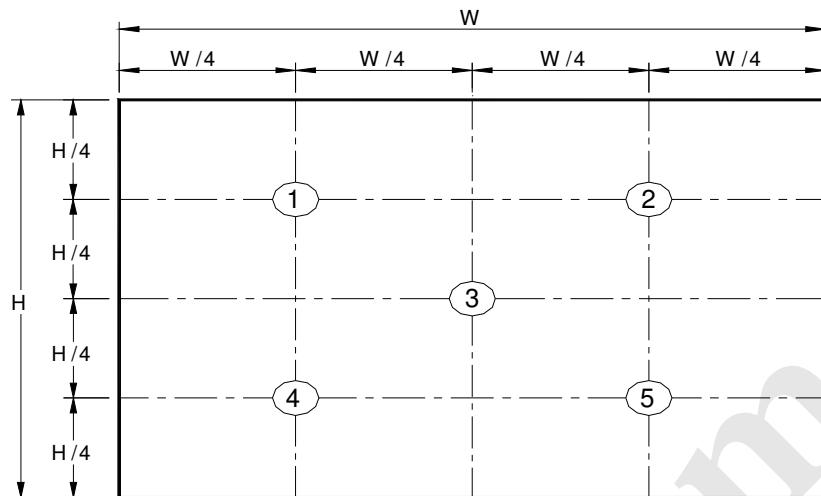

**Note 2:** 13 points position (Ref: Active area)

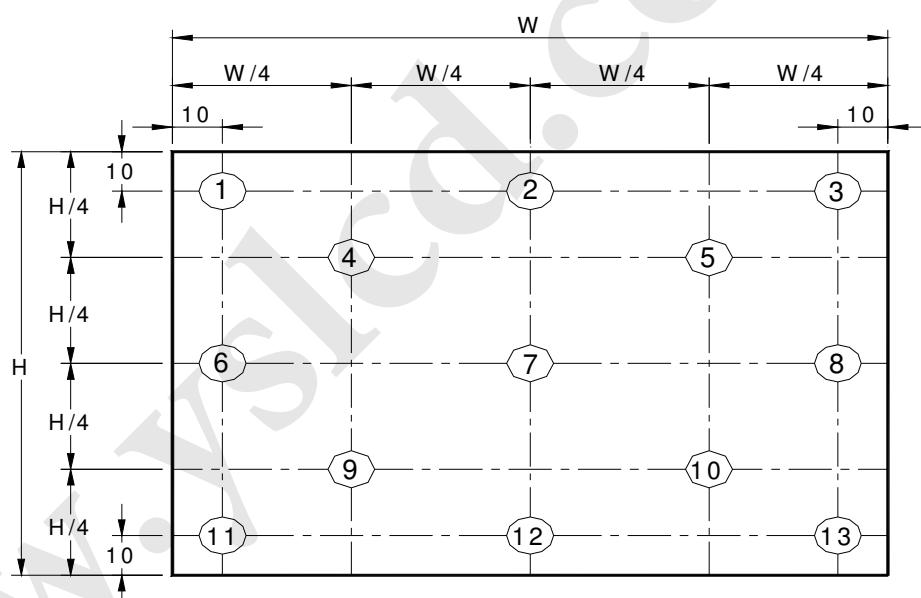

**Note 3:** The luminance uniformity of 5 or 13 points is defined by dividing the maximum luminance values by the minimum test point luminance


$$\delta_{W5} = \frac{\text{Maximum Brightness of five points}}{\text{Minimum Brightness of five points}}$$

$$\delta_{W13} = \frac{\text{Maximum Brightness of thirteen points}}{\text{Minimum Brightness of thirteen points}}$$

**Note 4:** Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room, measurement should be executed in the center of

screen unless otherwise noted.

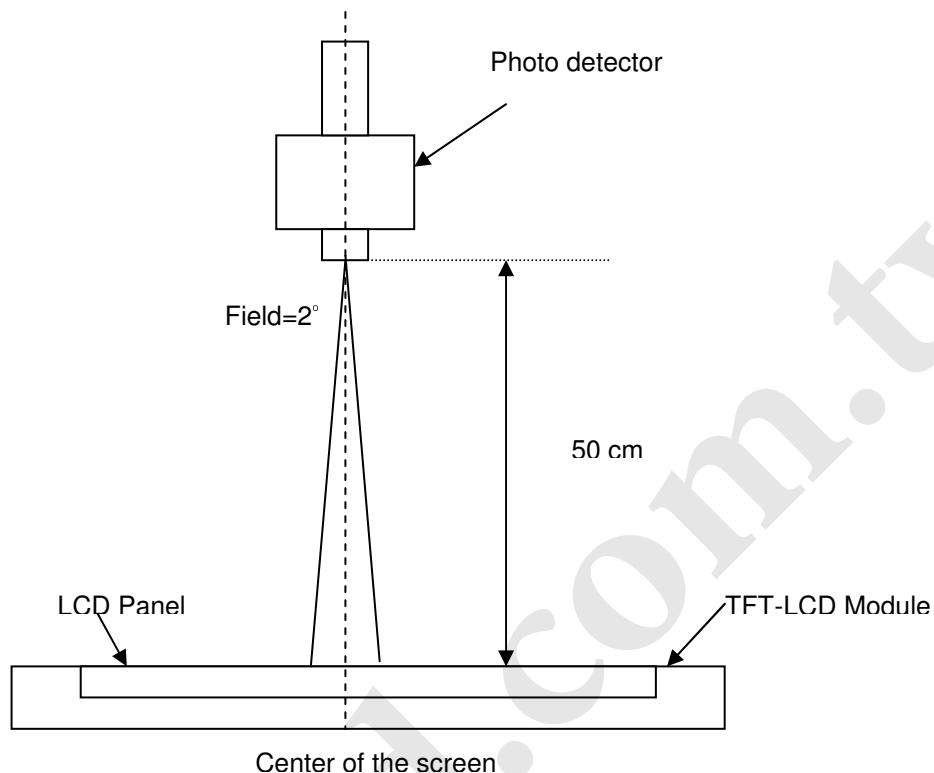

**Note 5 :** Definition of Average Luminance of White ( $Y_L$ ):

Measure the luminance of gray level 63 at 5 points ,  $Y_L = [L(1)+L(2)+L(3)+L(4)+L(5)] / 5$

$L(x)$  is corresponding to the luminance of the point X at Figure in Note (1).

**Note 6 :** Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$


**Note 7 :** Definition of Cross Talk (CT)

$$CT = |Y_B - Y_A| / Y_A \times 100 (\%)$$


Where

$Y_A$  = Luminance of measured location without gray level 0 pattern ( $\text{cd}/\text{m}^2$ )

$Y_B$  = Luminance of measured location with gray level 0 pattern ( $\text{cd}/\text{m}^2$ )

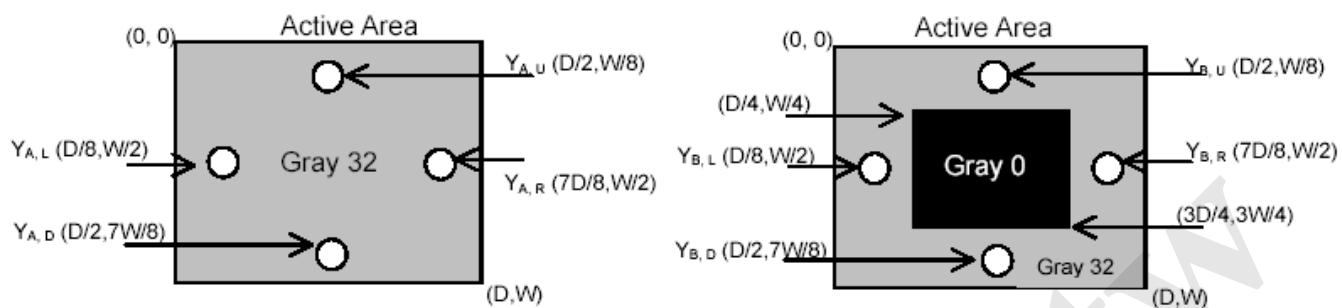
**Note 8:** Definition of response time:

The output signals of BM-7 or equivalent are measured when the input signals are changed from "Black" to "White" (falling time) and from "White" to "Black" (rising time), respectively. The response time is interval between the 10% and 90% of amplitudes. Refer to figure as below.

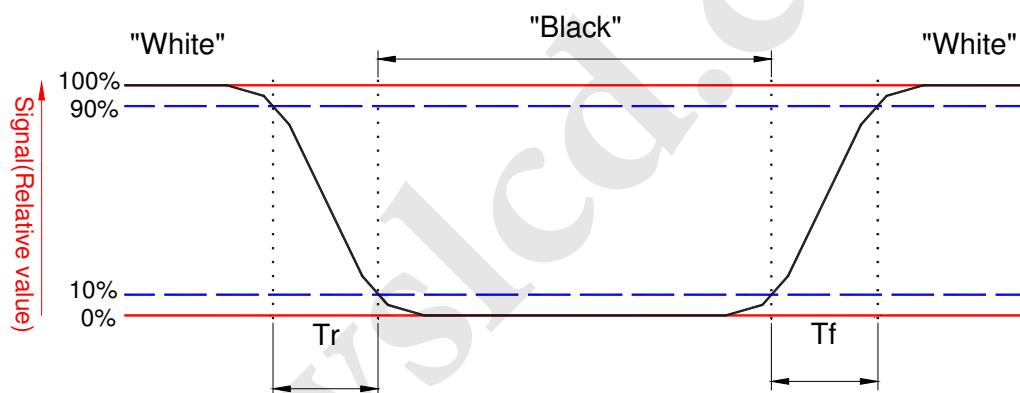


**Note 9.** Definition of viewing angle

Viewing angle is the measurement of contrast ratio  $\geq 10$ , at the screen center, over a  $180^\circ$  horizontal and  $180^\circ$  vertical range (off-normal viewing angles). The  $180^\circ$  viewing angle range is broken down as follows;  $90^\circ$  ( $\theta$ ) horizontal left and right and  $90^\circ$  ( $\phi$ ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

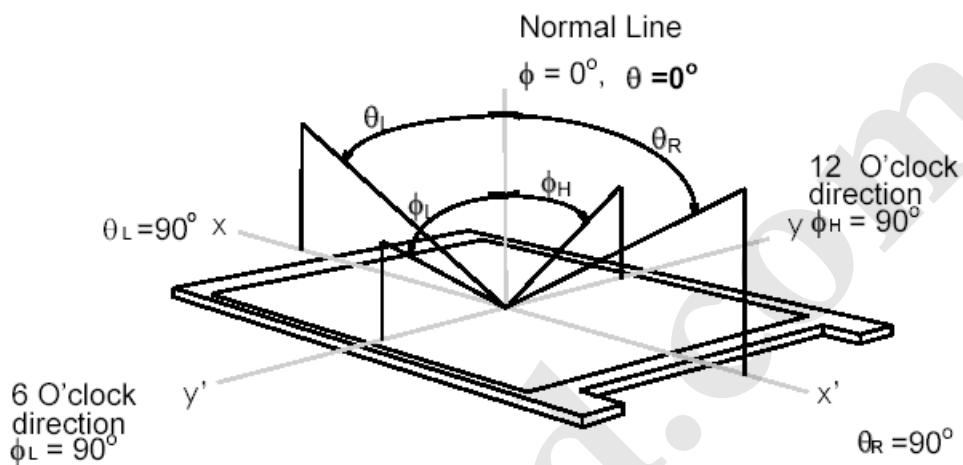

### 3. Functional Block Diagram

The following diagram shows the functional block of the 11.6 inches wide Color TFT/LCD 40 Pin one channel Module

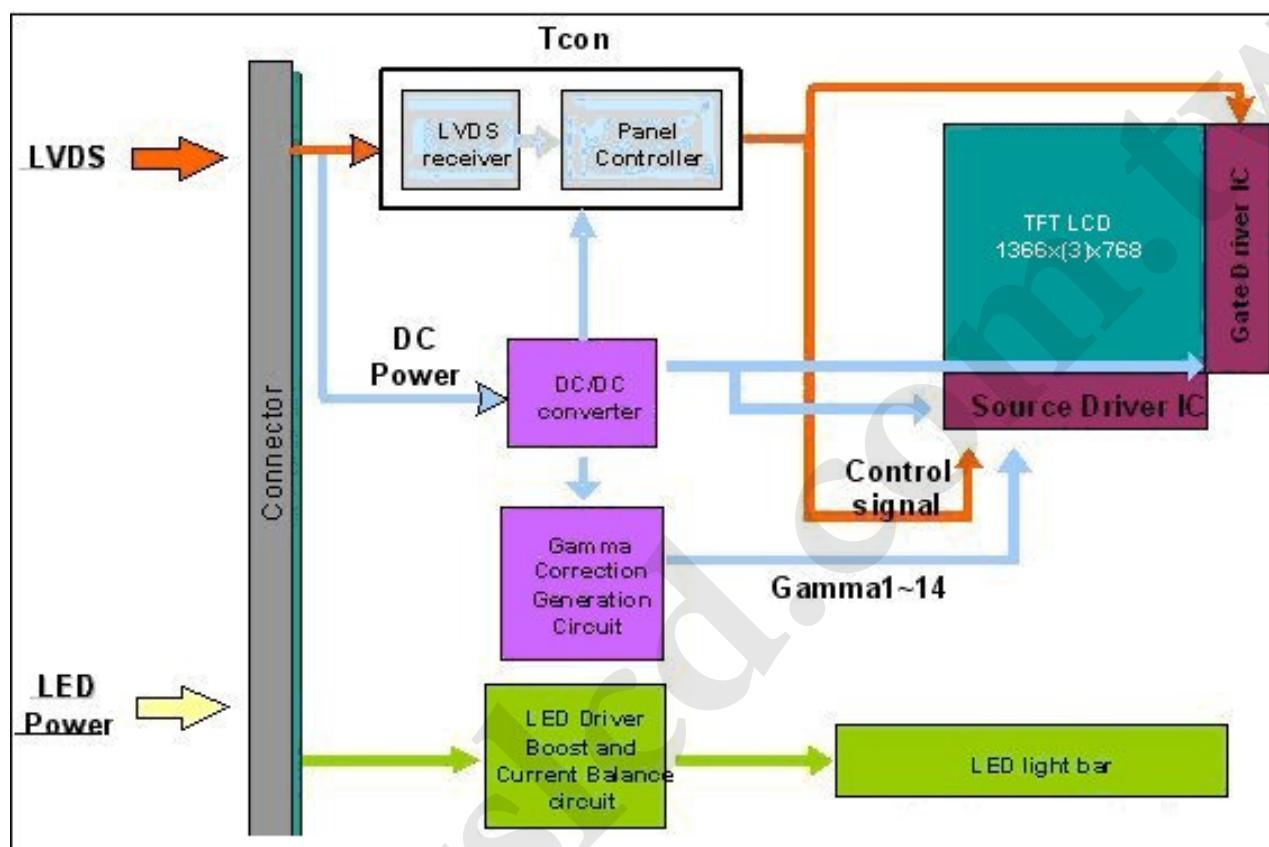

## 4. Absolute Maximum Ratings

An absolute maximum rating of the module is as following:

### 4.1 Absolute Ratings of TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	V <sub>in</sub>	-0.3	+4.0	[Volt]	Note 1,2

### 4.2 Absolute Ratings of Environment


Item	Symbol	Min	Max	Unit	Conditions
Operating Temperature	TOP	0	+50	[°C]	Note 4
Operation Humidity	HOP	5	95	[%RH]	Note 4
Storage Temperature	TST	-20	+60	[°C]	Note 4
Storage Humidity	HST	5	95	[%RH]	Note 4

Note 1: At Ta (25°C )

Note 2: Permanent damage to the device may occur if exceed maximum values

Note 3: LED specification refer to section 5.2

Note 4: For quality performance, please refer to AUO IIS (Incoming Inspection Standard).

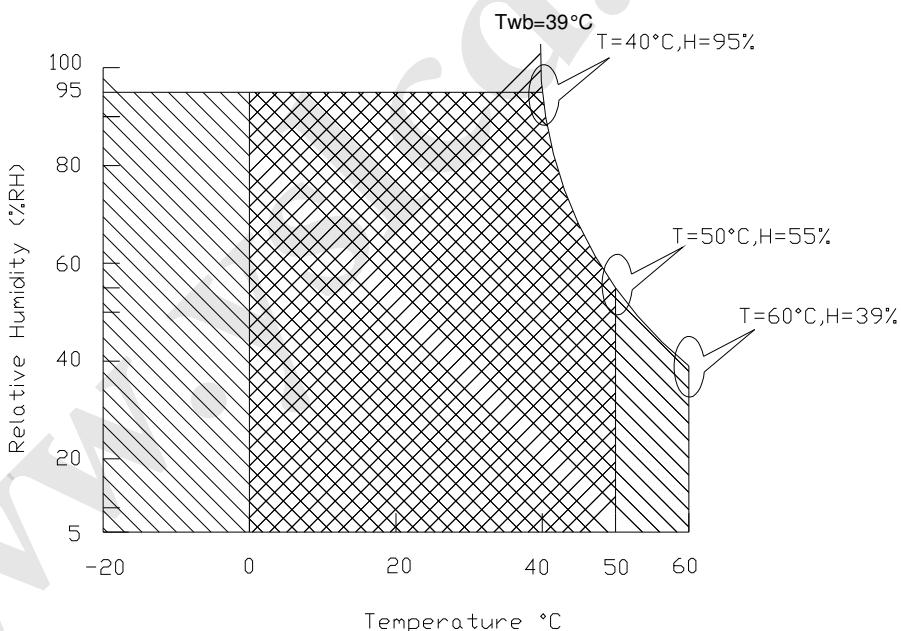

Operating Range

Storage Range

+

## 5. Electrical Characteristics

### 5.1 TFT LCD Module

#### 5.1.1 Power Specification


Input power specifications are as follows;

The power specification are measured under 25°C and frame frequency under 60Hz

Symbol	Parameter	Min	Typ	Max	Units	Note
VDD	Logic/LCD Drive Voltage	3.0	3.3	3.6	[Volt]	
PDD	VDD Power	-	-	0.8	[Watt]	Note 1
IDD	IDD Current	-	-	242	[mA]	Note 1
IRush	Inrush Current	-	-	2000	[mA]	Note 2
VDDRp	Allowable Logic/LCD Drive Ripple Voltage	-	-	100	[mV] p-p	

Note 1 : Maximum Measurement Condition : Black Pattern at 3.3V driving voltage. ( $P_{max}=V_{3.3} \times I_{black}$ )

Note 2 : Measure Condition

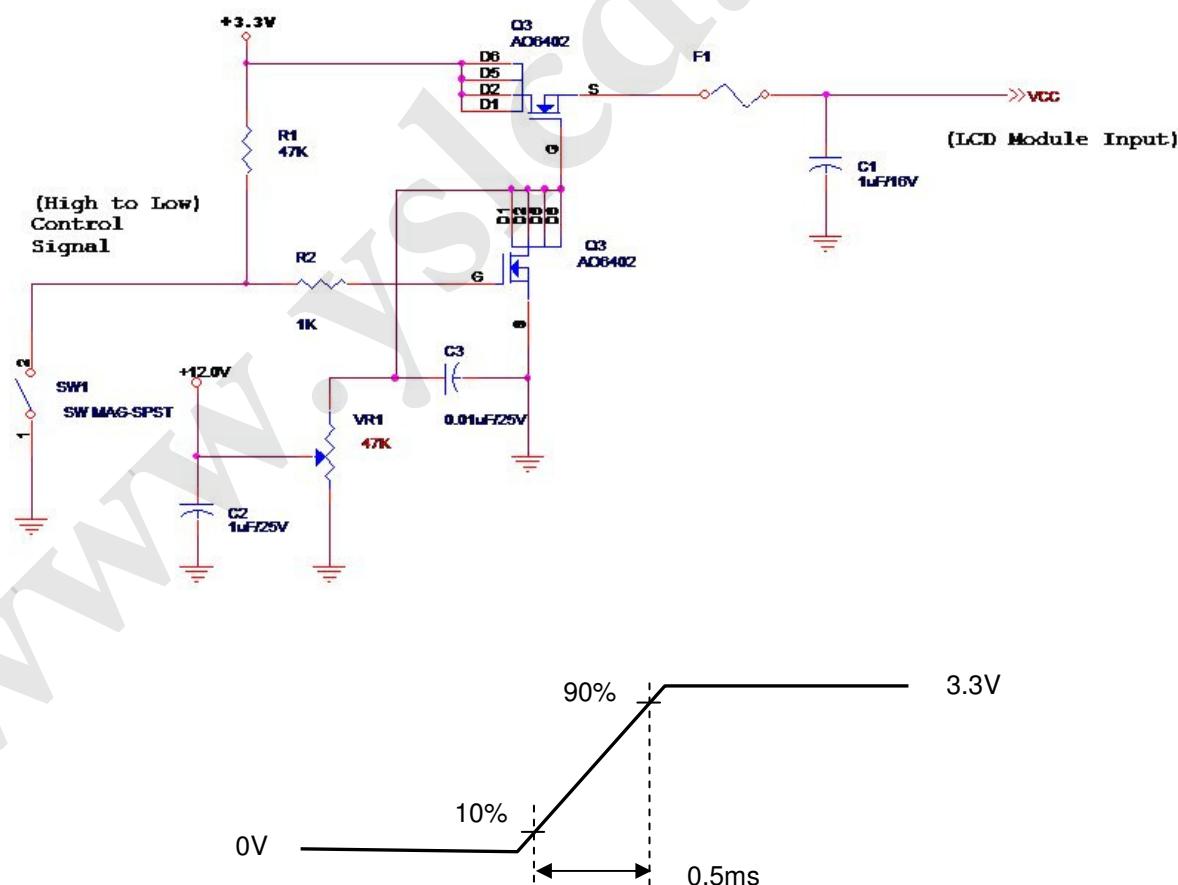


### 5.1.2 Signal Electrical Characteristics

Input signals shall be low or High-impedance state when VDD is off.

Signal electrical characteristics are as follows;

Parameter	Condition	Min	Max	Unit
$V_{th}$	Differential Input High Threshold ( $V_{cm}=+1.2V$ )		100	[mV]
$V_{tl}$	Differential Input Low Threshold ( $V_{cm}=+1.2V$ )	-100	-	[mV]
$V_{ID}$	Differential Input Voltage	100	600	[mV]
$V_{cm}$	Differential Input Common Mode Voltage	1.125	1.375	[V]

Note: LVDS Signal Waveform

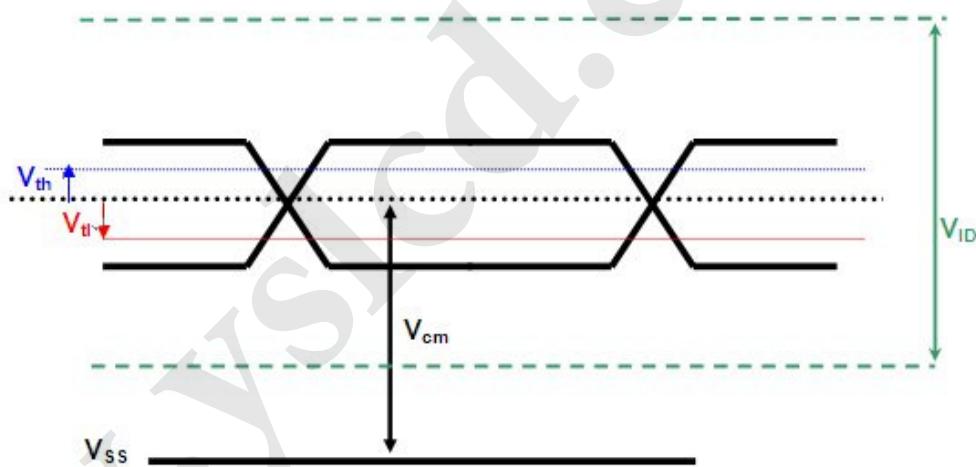



# Product Specification

AU Optronics Corporation

## 5.2 Backlight Unit

### 5.2.1 LED characteristics

Parameter	Symbol	Min	Typ	Max	Units	Condition
Backlight Power Consumption	P <sub>LED</sub>	-	-	1.9	[Watt]	(Ta=25°C), Note 1 Vin =12V
LED Life-Time	N/A	10,000	-	-	Hour	(Ta=25°C), Note 2 I <sub>F</sub> =20 mA

**Note 1:** Calculator value for reference  $P_{LED} = V_F \text{ (Normal Distribution)} * I_F \text{ (Normal Distribution)} / \text{Efficiency}$ , and P<sub>LED</sub> include driving circuit loss.

**Note 2:** The LED life-time define as the estimated time to 50% degradation of initial luminous.

### 5.2.2 Backlight input signal characteristics

Parameter	Symbol	Min	Typ	Max	Units	Remark
LED Power Supply	V <sub>LED</sub>	6.0	12.0	21.0	[Volt]	
LED Enable Input High Level	V <sub>LED_EN</sub>	2.0	-	5.5	[Volt]	Define as Connector Interface (Ta=25°C)
LED Enable Input Low Level		-	-	0.8	[Volt]	
PWM Logic Input High Level	V <sub>PWM_EN</sub>	2.0	-	5.5	[Volt]	
PWM Logic Input Low Level		-	-	0.8	[Volt]	
PWM Input Frequency	F <sub>PWM</sub>	180	1K	10K	Hz	
PWM Duty Ratio	Duty	1	--	100	%	


**Note 1:** Recommend system pull up/down resistor no bigger than 10kohm

**Note 2:** Minimum PWM Duty Ratio (Duty) is 1%, when F<sub>PWM</sub> is low Hz er than 5KHz. Otherwise, minimum PWM duty ratio (duty) is limited to 5%


## 6. Signal Interface Characteristic

### 6.1 Pixel Format Image

Following figure shows the relationship of the input signals and LCD pixel format.

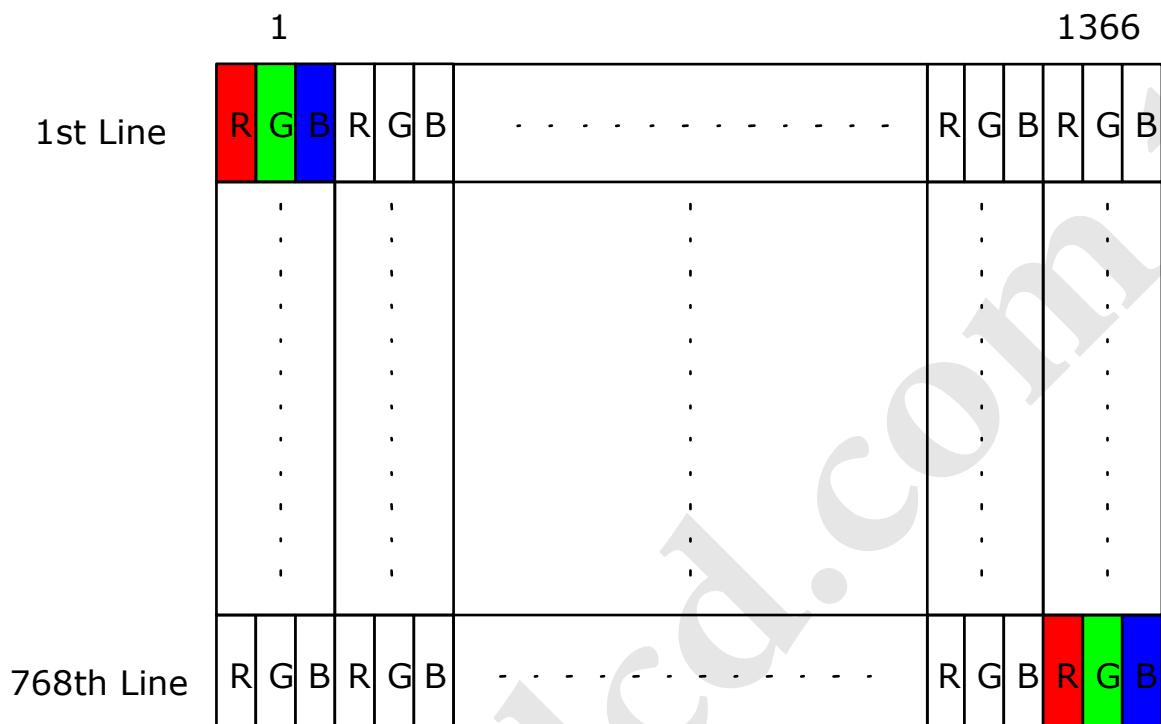

## 6.2 The Input Data Format

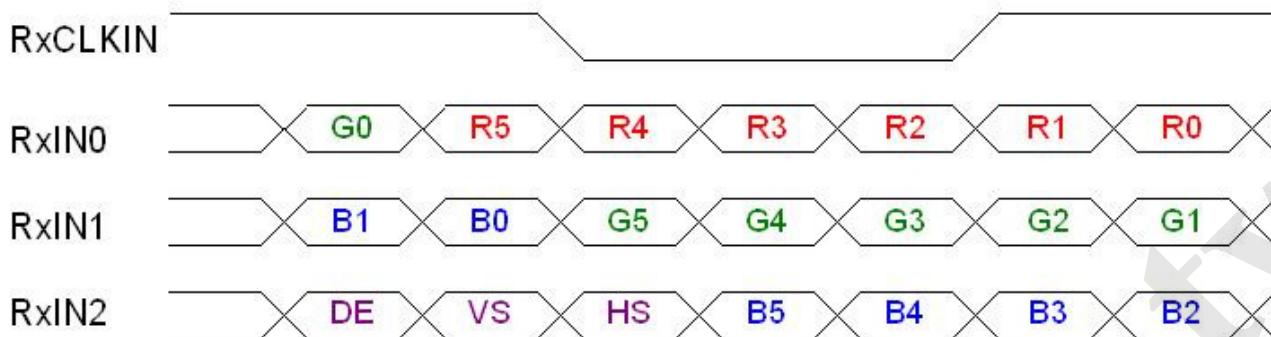

Signal Name	Description	
R5 R4 R3 R2 R1 R0	Red Data 5 (MSB) Red Data 4 Red Data 3 Red Data 2 Red Data 1 Red Data 0 (LSB) Red-pixel Data	Red-pixel Data Each red pixel's brightness data consists of these 6 bits pixel data.
G5 G4 G3 G2 G1 G0	Green Data 5 (MSB) Green Data 4 Green Data 3 Green Data 2 Green Data 1 Green Data 0 (LSB) Green-pixel Data	Green-pixel Data Each green pixel's brightness data consists of these 6 bits pixel data.
B5 B4 B3 B2 B1 B0	Blue Data 5 (MSB) Blue Data 4 Blue Data 3 Blue Data 2 Blue Data 1 Blue Data 0 (LSB) Blue-pixel Data	Blue-pixel Data Each blue pixel's brightness data consists of these 6 bits pixel data.
RxCLKIN	Data Clock	The signal is used to strobe the pixel data and DE signals. All pixel data shall be valid at the falling edge when the DE signal is high.
DE	Display Timing	This signal is strobed at the falling edge of RxCLKIN. When the signal is high, the pixel data shall be valid to be displayed.
VS	Vertical Sync	The signal is synchronized to RxCLKIN .
HS	Horizontal Sync	The signal is synchronized to RxCLKIN .

Note: Output signals from any system shall be low or High-impedance state when VDD is off.



# Product Specification

AU Optronics Corporation

## 6.3 Integration Interface Requirement

### 6.3.1 Connector Description

Physical interface is described as for the connector on module.

These connectors are capable of accommodating the following signals and will be following components.


Connector Name / Designation	For Signal Connector
Manufacturer	STM or compatible
Type / Part Number	STM MSAK24025P40 or compatible
Mating Housing/Part Number	IPEX 20453-040T-11 or compatible

### 6.3.2 Pin Assignment

LVDS is a differential signal technology for LCD interface and high speed data transfer device.

PIN#	Signal Name	Description
1	NC	No Connection (Reserve)
2	VDD	Power Supply +3.3V
3	VDD	Power Supply +3.3V
4	VEDID	EDID 3.3V Power
5	BIST	Panel self test
6	CLK_EDID	EDID Clock Input
7	DAT_EDID	EDID Data Input
8	RxOIN0-	-LVDS Differential Data INPUT(Odd R0-R5,G0)
9	RxOIN0+	+LVDS Differential Data INPUT(Odd R0-R5,G0)
10	VSS	Ground
11	RxOIN1-	-LVDS Differential Data INPUT(Odd G1-G5,B0-B1)
12	RxOIN1+	+LVDS Differential Data INPUT(Odd G1-G5,B0-B1)
13	VSS	Ground
14	RxOIN2-	-LVDS Differential Data INPUT(Odd B2-B5,HS,VS,DE)
15	RxOIN2+	+LVDS Differential Data INPUT(Odd B2-B5,HS,VS,DE)
16	VSS	Ground
17	RxOCKIN-	-LVDS Odd Differential Clock INPUT
18	RxOCKIN+	+LVDS Odd Differential Clock INPUT
19	NC	No connection (Disable)
20	NC	No connection
21	NC	No connection
22	VSS	Ground

23	NC	No connection
24	NC	No connection
25	VSS	Ground
26	NC	No connection
27	NC	No connection
28	VSS	Ground
29	NC	No connection
30	NC	No connection
31	VLED_GND	LED Ground
32	VLED_GND	LED Ground
33	VLED_GND	LED Ground
34	NC	No Connection (Reserve)
35	PWM_IN	PWM logic input level
36	VLED_EN	LED enable input level
37	DCR_EN	DCR function enable
38	VLED	LED Power Supply
39	VLED	LED Power Supply
40	VLED	LED Power Supply

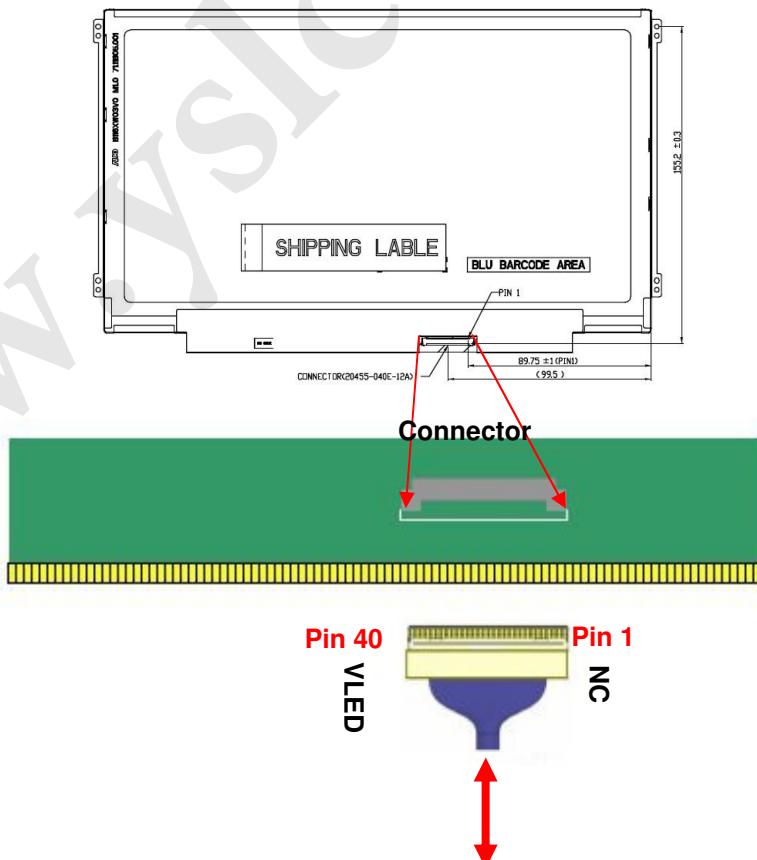

Note1: Input signals shall be low or High-impedance state when VDD is off.

## 6.4 Interface Timing

### 6.4.1 Timing Characteristics

Basically, interface timings should match the 1366x768 /60Hz manufacturing guide line timing.


Parameter	Symbol	Min.	Typ.	Max.	Unit
Frame Rate	-	40	60	-	Hz
Clock frequency	$1/T_{Clock}$	65	70.5	80	MHz
Vertical Section	Period	$T_V$	776	793	1000
	Active	$T_{VD}$	768		
	Blanking	$T_{VB}$	8	25	180
Horizontal Section	Period	$T_H$	1396	1456	2000
	Active	$T_{HD}$	1366		
	Blanking	$T_{HB}$	30	90	634

**Note1:** The above is as optimized setting

**Note2:** DE mode only


The maximum clock frequency =  $(1366+B)*(768+A)*60 < 80\text{MHz}$

### 6.4.2 Timing diagram

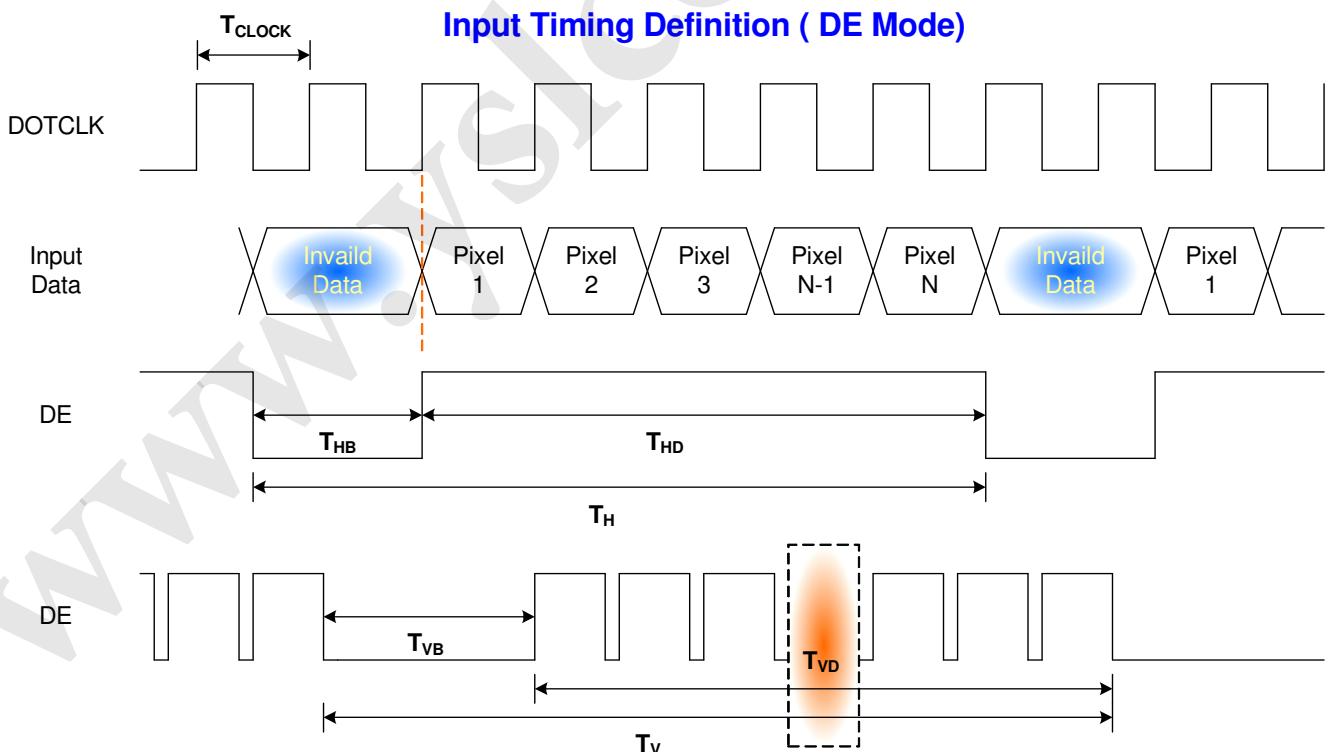


## 6.5 Power ON/OFF Sequence

Power on/off sequence is as follows. Interface signals and LED on/off sequence are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off

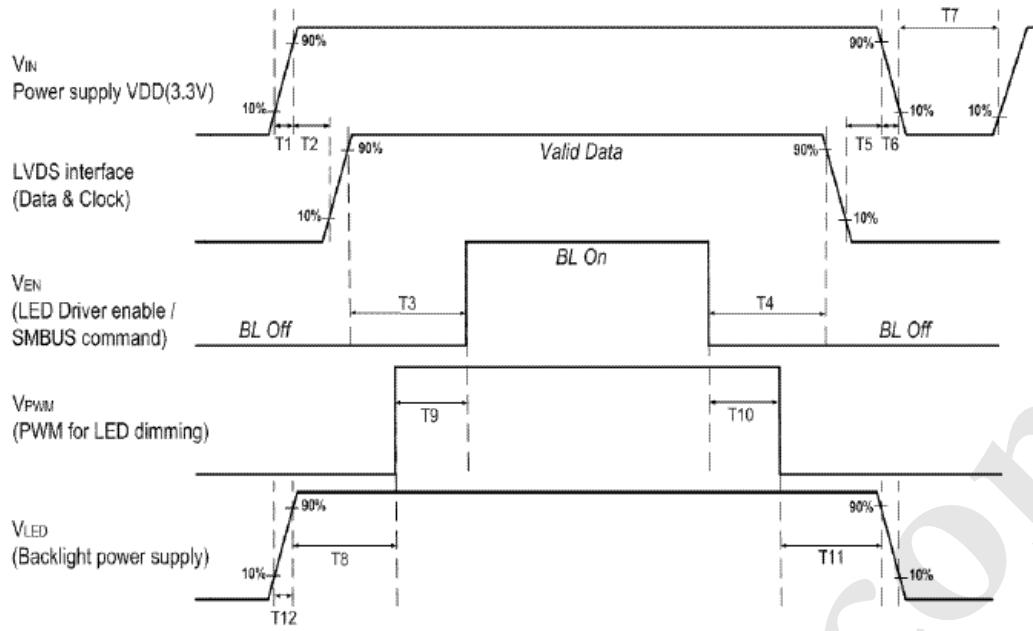

	Min (ms)	Max (ms)
T1	0.5	10
T2	0	50
T3	200	-
T4	200	-
T5	0	50
T6	0	10
T7	500	-
T8	10	-
T9	10	-
T10	10	-
T11	10	-
T12	0.5	10
T13	1*	-
T14	1*	-

Note : When the adapter is hot plugged, the backlight power supply sequence is shown as below.

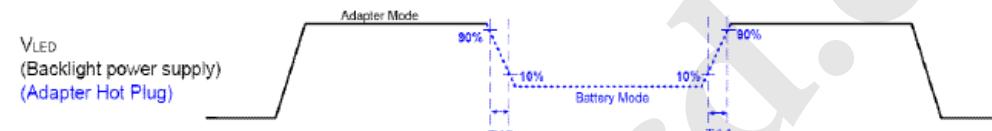

Note 1 : If T3<200ms, the display garbage may occur. (T3>200ms is recommended)

Note 2 : If T1 or T12<0.5ms, the inrush current may cause the damage of fuse. If T1 or T12<0.5ms, the inrush current  $I^2t$  is under typical melt of fuse Spec, there is no mentioned problem.

Seamless change:  $T_{13}/T_{14} = 5 \times T_{PWM}$ \*

\* $T_{PWM} = 1/\text{PWM Frequency}$

## 7. Panel Reliability Test

### 7.1 Vibration Test

**Test Spec:**

- Test method: Non-Operation
- Acceleration: 1.5 G
- Frequency: 10 - 500Hz Random
- Sweep: 30 Minutes each Axis (X, Y, Z)

### 7.2 Shock Test

**Test Spec:**

- Test method: Non-Operation
- Acceleration: 220 G , Half sine wave
- Active time: 2 ms
- Pulse: X,Y,Z .one time for each side

### 7.3 Reliability Test

Items	Required Condition	Note
Temperature Humidity Bias	Ta= 40°C, 90%RH, 300h	
High Temperature Operation	Ta= 50°C, Dry, 300h	
Low Temperature Operation	Ta= 0°C, 300h	
High Temperature Storage	Ta= 60°C, 35%RH, 300h	
Low Temperature Storage	Ta= -20°C, 50%RH, 250h	
Thermal Shock Test	Ta=-20°C to 60°C, Duration at 30 min, 100 cycles	
ESD	Contact : ±8 KV Air : ±15 KV	Note 1


**Note1:** According to EN 61000-4-2 , ESD class B: Some performance degradation allowed. No data lost

. Self-recoverable. No hardware failures.

**Remark:** MTBF (Excluding the LED): 30,000 hours with a confidence level 90%

## **8. Mechanical Characteristics**


## 8.1 LCM Outline Dimension

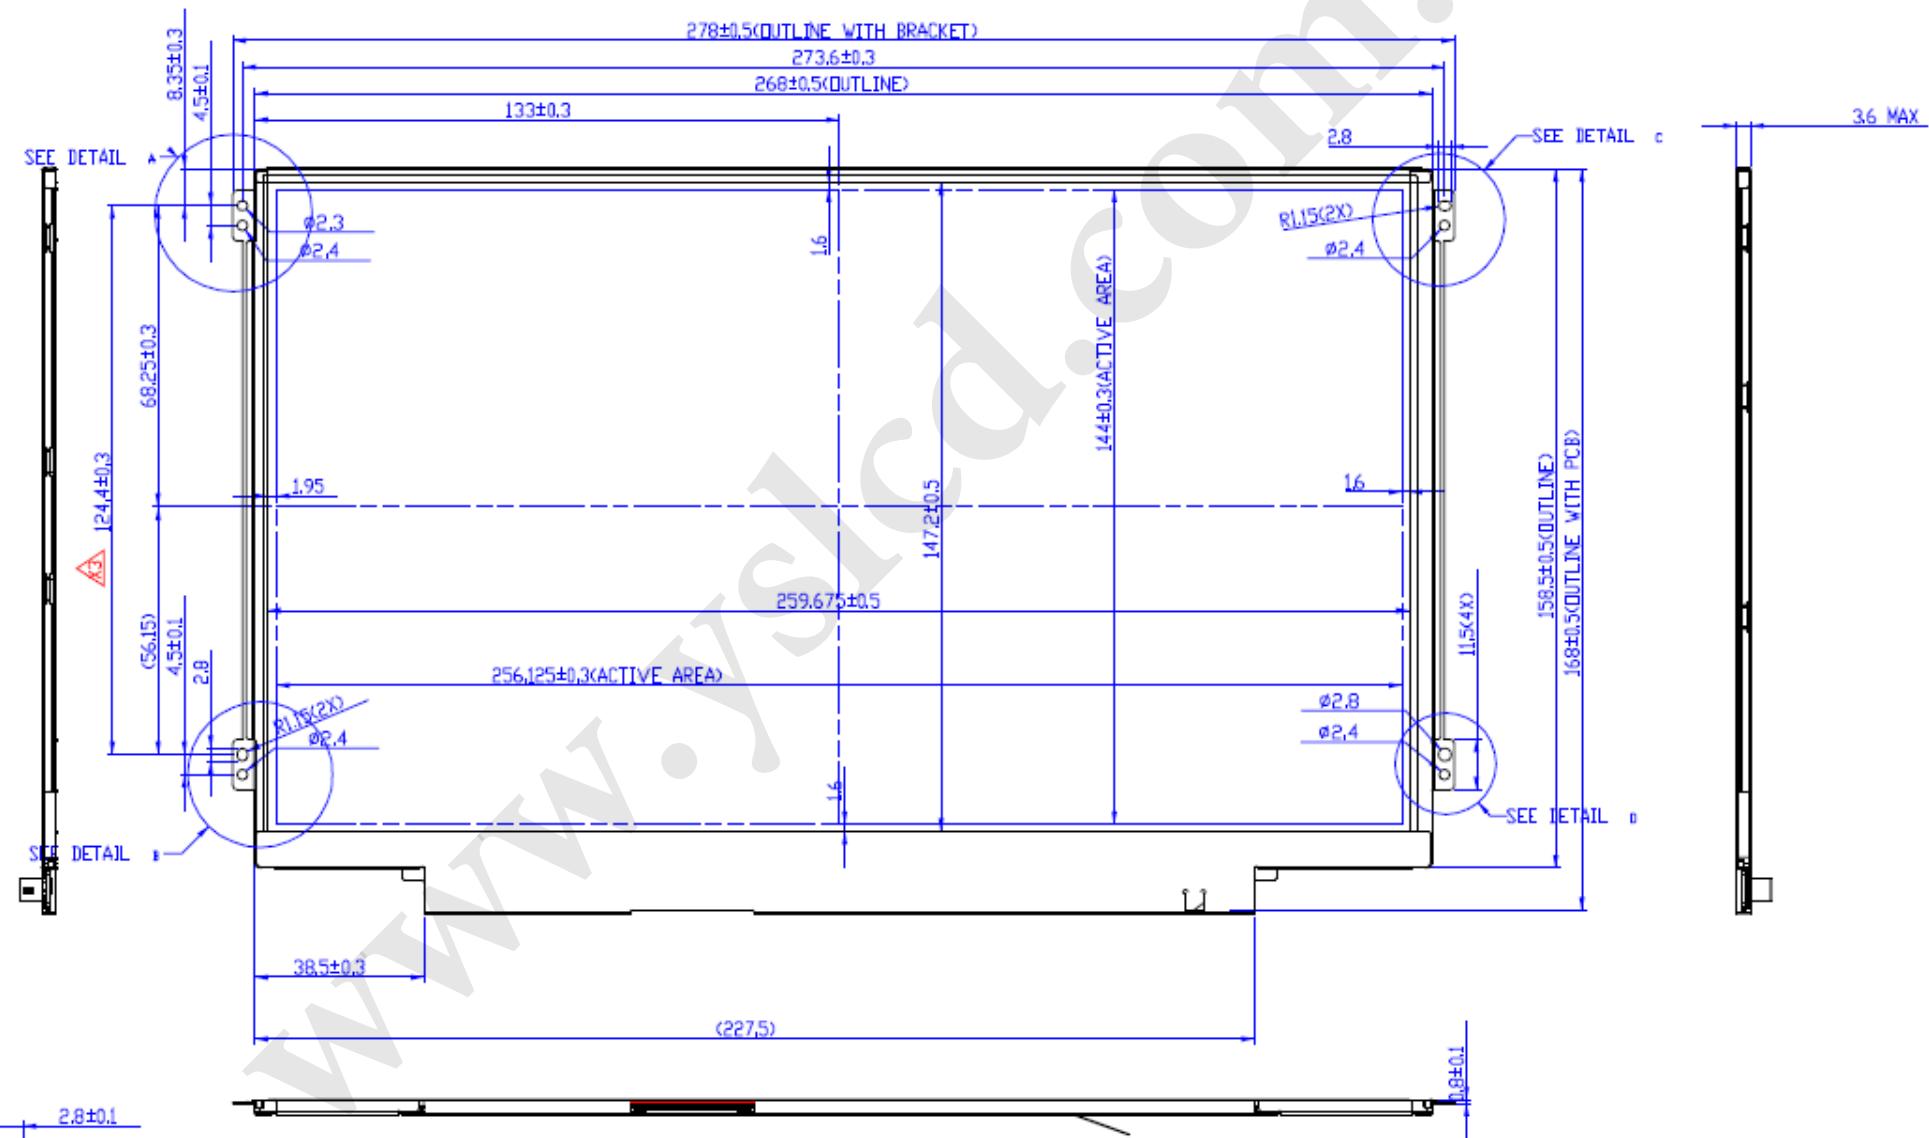



# Product Specification

AU Optronics Corporation

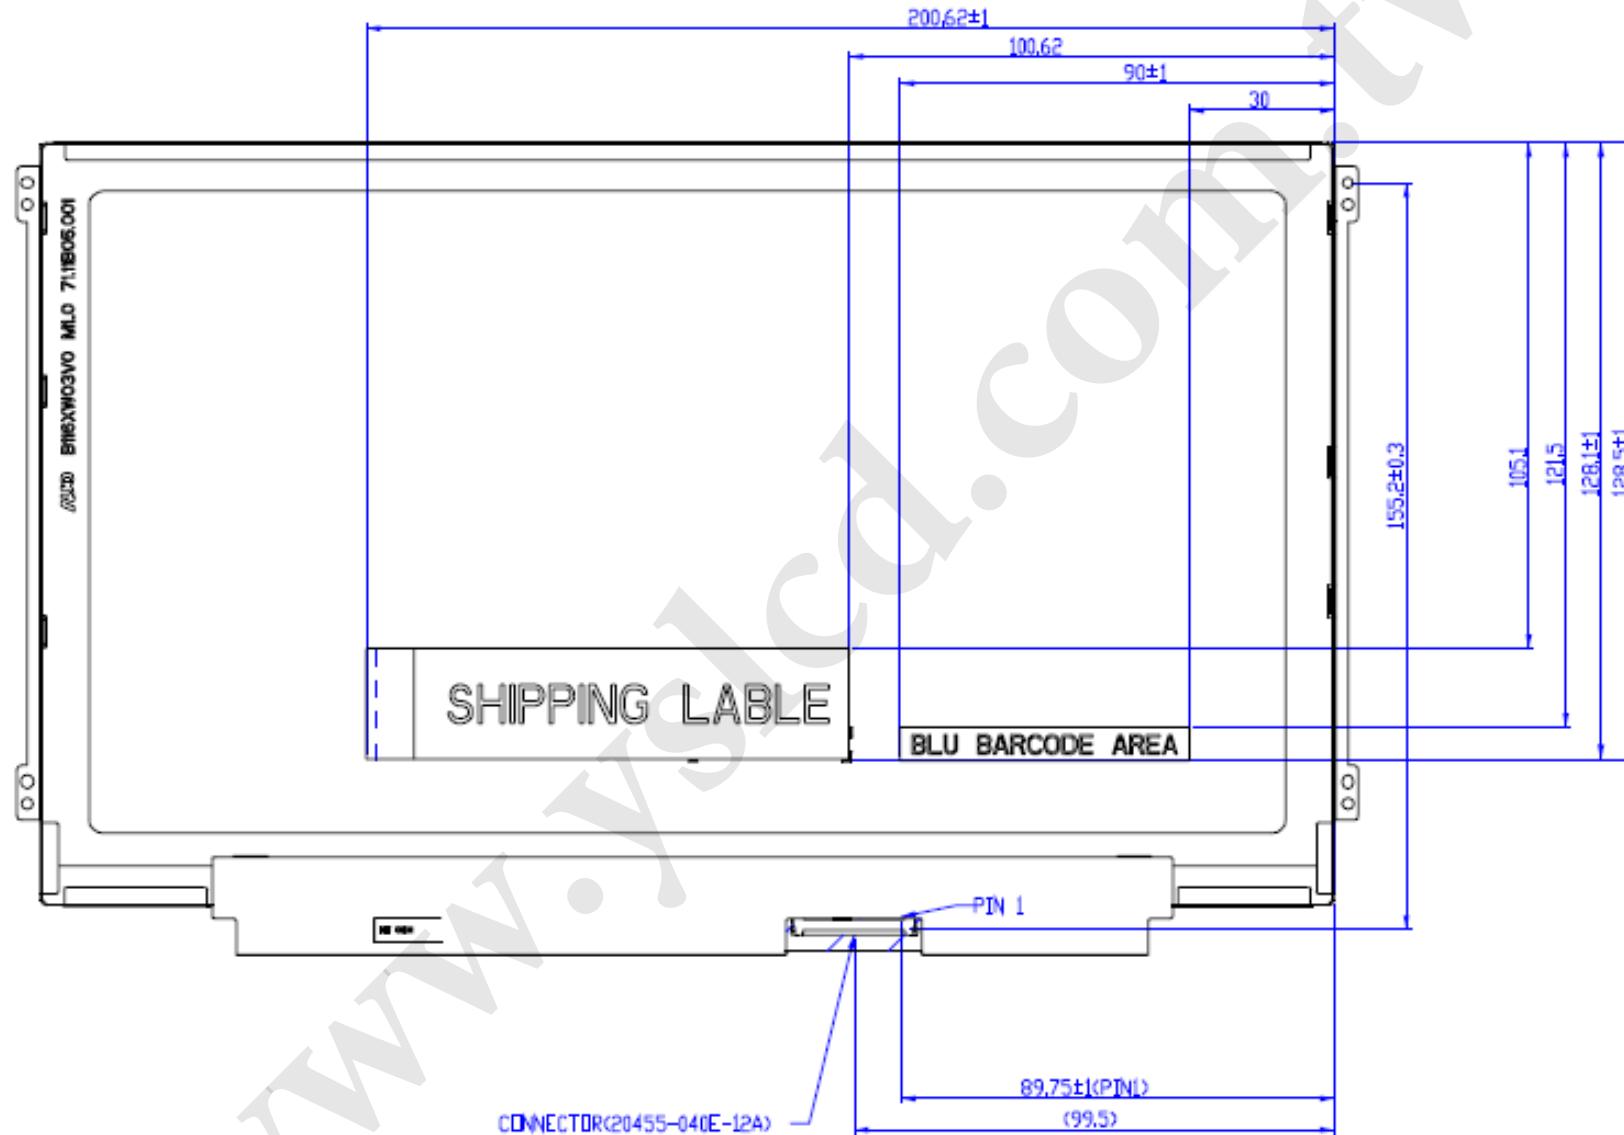

Note: Prevention IC damage, IC positions not allowed any overlap over these areas.



# Product Specification

AU OPTRONICS CORPORATION

## 9. Shipping and Package


### 9.1 Shipping Label Format

[Z30]




## 9.2 Carton Package

The outside dimension of carton is 553(L)mm\* 275(W)mm\* 379(H)mm

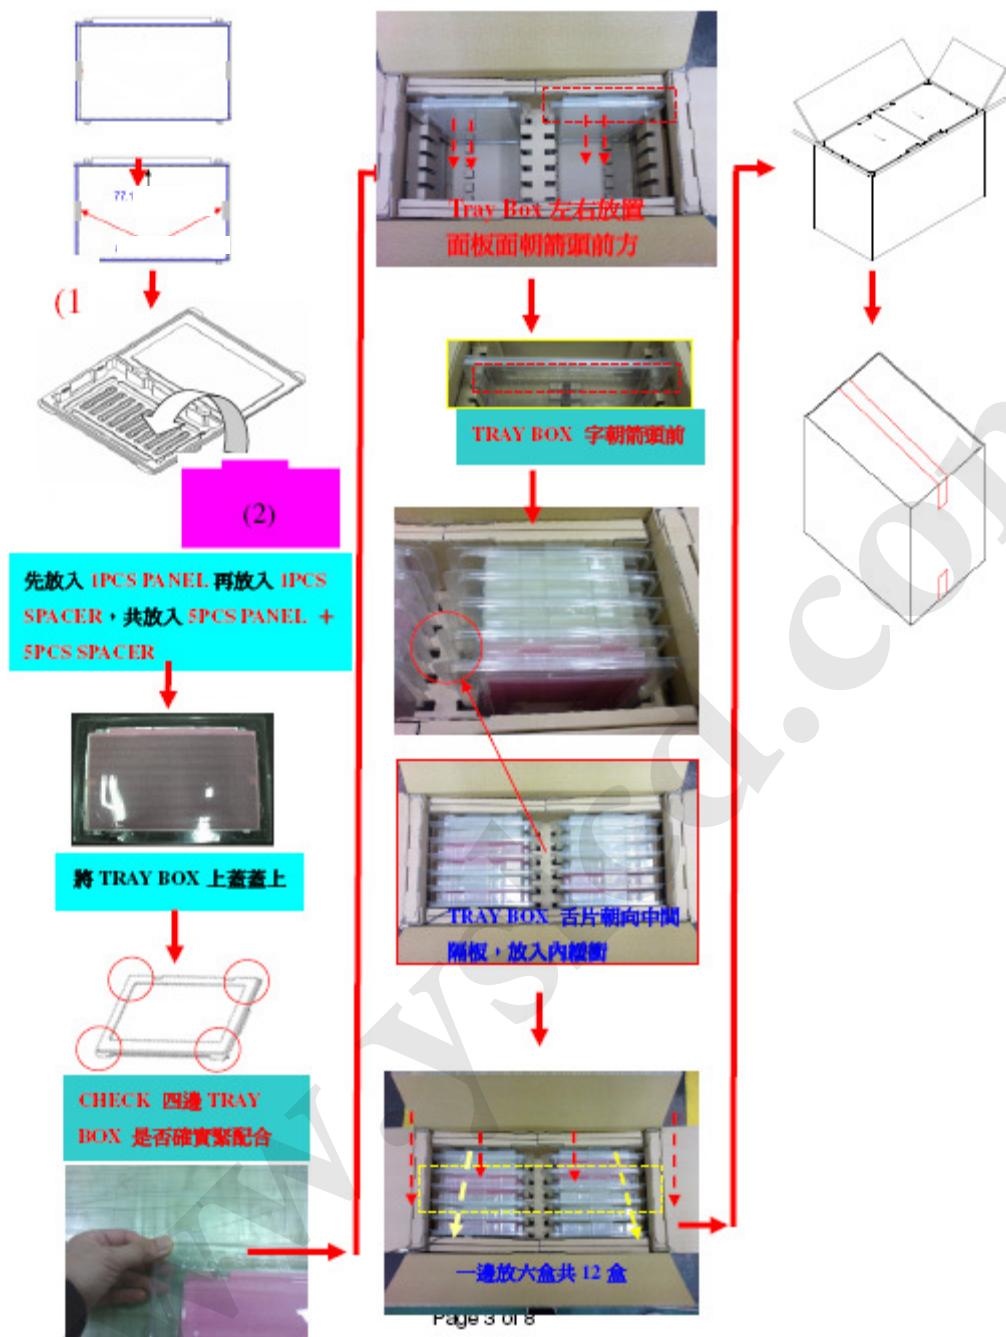

### 9.3 Shipping Package of Palletizing Sequence

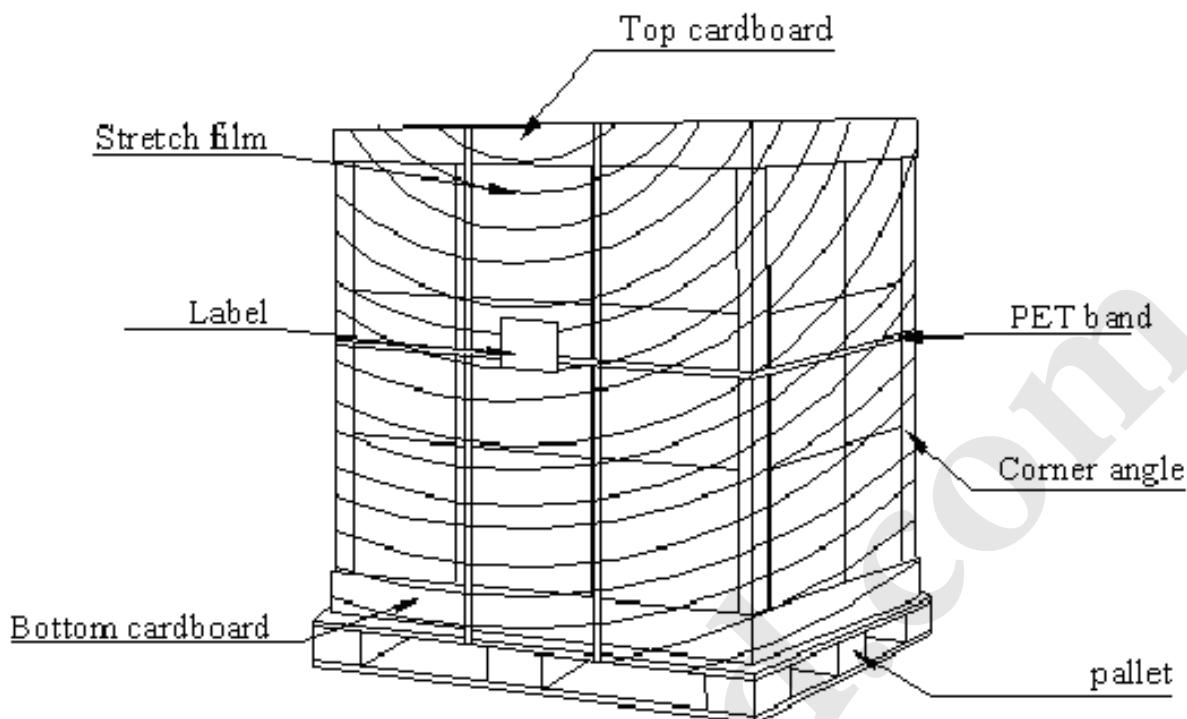

### 10. Appendix: EDID Description

	Byte (hex)	Field Name and Comments	Value (hex)	Value (binary)	Value (DEC)
Header	0	Header	00	00000000	0
	1	Header	FF	11111111	255
	2	Header	FF	11111111	255
	3	Header	FF	11111111	255
	4	Header	FF	11111111	255
	5	Header	FF	11111111	255
	6	Header	FF	11111111	255
	7	Header	00	00000000	0
Vendor / Product EDID Version	8	EISA manufacture code = 3 Character ID	06	00000110	6
	9	EISA manufacture code (Compressed ASCII)	AF	10101111	175
	0A	Panel Supplier Reserved – Product Code	5C	01011100	92
	0B	Panel Supplier Reserved – Product Code	40	01000000	64
	0C	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000	0
	0D	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000	0
	0E	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000	0
	0F	LCD module Serial No - Preferred but Optional ("0" if not used)	00	00000000	0
	10	Week of manufacture	00	00000000	0



# Product Specification

AU OPTRONICS CORPORATION

	11	Year of manufacture	17	00010111	23
	12	EDID structure version # = 1	01	00000001	1
	13	EDID revision # = 4	04	00000100	4
Display Parameters	14	Video I/P definition	90	10010000	144
	15	Max H image size = 25.6 cm(Rounded to cm)	1A	00011010	26
	16	Max V image size = 14.4 cm(Rounded to cm)	0E	00001110	14
	17	Display gamma = (gamma × 100)-100 = Example: ( 2.2×100 ) - 100 = 120	78	01111000	120
	18	Feature support	02	00000010	2
	19	Red/Green Low bit (RxRy/GxGy)	99	10011001	153
Panel Color Coordinates	1A	Blue/White Low bit (BxBy/WxWy)	85	10000101	133
	1B	Red X Rx = 0.584	95	10010101	149
	1C	Red Y Ry = 0.333	55	01010101	85
	1D	Green X Rx = 0.338	56	01010110	86
	1E	Green Y Ry = 0.571	92	10010010	146
	1F	Blue X Rx = 0.158	28	00101000	40
	20	Blue Y Ry = 0.133	22	00100010	34
	21	White X Rx = 0.313	50	01010000	80
	22	White Y Ry = 0.329	54	01010100	84
	23	Established timings 1 (00h if not used)	00	00000000	0
Established Timings	24	Established timings 2 (00h if not used)	00	00000000	0
	25	Manufacturer's timings (00h if not used)	00	00000000	0
	26	Standard timing ID1 (01h if not used)	01	00000001	1
Standard Timing ID	27	Standard timing ID1 (01h if not used)	01	00000001	1
	28	Standard timing ID2 (01h if not used)	01	00000001	1
	29	Standard timing ID2 (01h if not used)	01	00000001	1
	2A	Standard timing ID3 (01h if not used)	01	00000001	1
	2B	Standard timing ID3 (01h if not used)	01	00000001	1
	2C	Standard timing ID4 (01h if not used)	01	00000001	1
	2D	Standard timing ID4 (01h if not used)	01	00000001	1
	2E	Standard timing ID5 (01h if not used)	01	00000001	1
	2F	Standard timing ID5 (01h if not used)	01	00000001	1
	30	Standard timing ID6 (01h if not used)	01	00000001	1
	31	Standard timing ID6 (01h if not used)	01	00000001	1
	32	Standard timing ID7 (01h if not used)	01	00000001	1
	33	Standard timing ID7 (01h if not used)	01	00000001	1
	34	Standard timing ID8 (01h if not used)	01	00000001	1
	35	Standard timing ID8 (01h if not used)	01	00000001	1
Timing Descriptor #1	36	Pixel Clock/10,000 (LSB)	70	01110000	112
	37	Pixel Clock/10,000 (MSB)	1C	00011100	28
	38	Horizontal Active = 1366 pixels (lower 8 bits)	56	01010110	86



# Product Specification

AU OPTRONICS CORPORATION

	39	Horizontal Blanking (Thbp) = 320 pixels (lower 8 bits)	A2	10100010	162
	3A	Horizontal Active/Horizontal blanking (Thbp) (upper4:4 bits)	50	01010000	80
	3B	Vertical Active = 768 lines	00	00000000	0
	3C	Vertical Blanking (Tvbp) = 25 lines (DE Blanking typ. for DE only panels)	19	00011001	25
	3D	Vertical Active : Vertical Blanking (Tvbp) (upper4:4 bits)	30	00110000	48
	3E	Horizontal Sync, Offset (Thfp) = 48 pixels	30	00110000	48
	3F	Horizontal Sync, Pulse Width = 32 pixels	20	00100000	32
	40	Vertical Sync, Offset (Tvfp) = 3 lines Sync Width = 6 lines	36	00110110	54
	41	Horizontal Vertical Sync Offset/Width upper 2 bits	00	00000000	0
	42	Horizontal Image Size = 256 mm	00	00000000	0
	43	Vertical image Size = 144 mm	90	10010000	144
	44	Horizontal Image Size / Vertical image size	10	00010000	16
	45	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000	0
	46	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000	0
	47	Bit[7] 0: Non-interlace, 1: Interlace Bit[6:5] 00: Normal display, no stereo, see VESA EDID Spec 1.3 Bit[4:3] 00: Analog composite, 01: Bipolar analog composite, 10: Digital composite, 11: Digital separate Bit[2:1] : The interpretation of bits 2 and 1 is dependent on the decode of bits 4 and 3 - see VESA EDID Spec 1.3 Bit[0] : See VESA EDID Spec 1.3 ==> fix=1A	1A	00011010	26
Timing Descriptor #2 (=Timing Descriptor #1)	48	Pixel Clock/10,000 (LSB)	20	00100000	32
	49	Pixel Clock/10,000 (MSB)	17	00010111	23
	4A	Horizontal Active = 1366 pixels (lower 8 bits)	56	01010110	86
	4B	Horizontal Blanking (Thbp) = 188 pixels (lower 8 bits)	BC	10111100	188
	4C	Horizontal Active/Horizontal blanking (Thbp) (upper4:4 bits)	50	01010000	80
	4D	Vertical Active = 768 lines	00	00000000	0
	4E	Vertical Blanking (Tvbp) = 25 lines (DE Blanking typ. for DE only panels)	19	00011001	25
	4F	Vertical Active : Vertical Blanking (Tvbp) (upper4:4 bits)	30	00110000	48
	50	Horizontal Sync, Offset (Thfp) = 48 pixels	30	00110000	48
	51	Horizontal Sync, Pulse Width = 32 pixels	20	00100000	32
	52	Vertical Sync, Offset (Tvfp) = 3 lines Sync Width = 6 lines	36	00110110	54
	53	Horizontal Vertical Sync Offset/Width upper 2 bits	00	00000000	0
	54	Horizontal Image Size = 256 mm	00	00000000	0
	55	Vertical image Size = 144 mm	90	10010000	144
	56	Horizontal Image Size / Vertical image size	10	00010000	16
	57	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000	0
	58	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000	0



# Product Specification

AU OPTRONICS CORPORATION

		Bit[7] 0: Non-interlace, 1: Interlace Bit[6:5] 00: Normal display, no stereo, see VESA EDID Spec 1.3 Bit[4:3] 00: Analog composite, 01: Bipolar analog composite, 10: Digital Bit[2:1] : The interpretation of bits 2 and 1 is dependent on the decode of Bit[0] : See VESA EDID Spec 1.3 ==> fix=1A			
	59		1A	00011010	26
Timing Descriptor #3 Dell specific information	5A	Flag	00	00000000	0
	5B	Flag	00	00000000	0
	5C	Flag	00	00000000	0
	5D	Data Type Tag: Alphanumeric Data String (ASCII) ==> fix=FE	FE	11111110	254
	5E	Flag	00	00000000	0
	5F	Dell P/N 1 <sup>st</sup> Character	30	00110000	48
	60	Dell P/N 2 <sup>nd</sup> Character	4D	01001101	77
	61	Dell P/N 3 <sup>rd</sup> Character	4D	01001101	77
	62	Dell P/N 4 <sup>th</sup> Character	57	01010111	87
	63	Dell P/N 5 <sup>th</sup> Character	4E	01001110	78
	64	<b>EDID Revision</b> <b>Bit[6:0] See charts below</b> <b>Bit[7] 0: X-rev, 1: A-rev</b>	80	10000000	128
	65	Manufacturer P/N	42	01000010	66
	66	Manufacturer P/N	31	00110001	49
	67	Manufacturer P/N	31	00110001	49
	68	Manufacturer P/N	36	00110110	54
Timing Descriptor #4	69	Manufacturer P/N	58	01011000	88
	6A	Manufacturer P/N	54	01010100	84
	6B	Manufacturer P/N (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)	4E	01001110	78
	6C	Flag	00	00000000	0
	6D	Flag	00	00000000	0
	6E	Flag	00	00000000	0
	6F	Data Type Tag: Manufacturer Specified Data 00 ==> fix=00	00	00000000	0
	70	Flag	00	00000000	0
	71	Color Management	00	00000000	0
	72	Panel Structure	41	01000001	65
	73	Frame Rate	02	00000010	2
	74	Light Controller Interface and Luminance	97	10010111	151
	75	Outdoor Features	00	00000000	0
	76	Multi-Media Features	10	00010000	16
	77	Multi-Media Features	00	00000000	0
	78	Special Features #1	00	00000000	0



# Product Specification

AU OPTRONICS CORPORATION

Checksum	79	Special Features #2	01	00000001	1
	7A	Special Features #3	01	00000001	1
	7B	(If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)	0A	00001010	10
	7C	(If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)	20	00100000	32
	7D	(If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)	20	00100000	32
	7E	Extension flag (# of optional 128 EDID extension blocks to follow, Typ = 0)	00	00000000	0
	7F	Checksum (The 1-byte sum of all 128 bytes in this EDID block shall = 0)	03	00000011	3