INNOLUX DISPLAY CORPORATION

MT185GW01 V.2 LCD MODULE SPECIFICATION

( ) Preliminary Specification

(●) Final Specification

Approved by *Date*

www.jxlcd.com

Prepared by *Date*

Innolux Display Corporation,

No.160 Kesyue Rd., Chu-Nan Site, Hsinchu Science Park,

Chu-Nan 350, Miao-Li County, Taiwan

Tel: 886-37-586000 Fax: 886-37-586060

Document Number: MT185GW01 V.2-DR4-26

InnoLux copyright
All rights reserved,
Copying forbidden.

Record of Revision

Version	Revise Date	Page	Content
1.0	2008/11/10		Initial Release

www.jxlcd.com

版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

Contents:

A. General Specification	
B. Electrical Specifications	
1. Pin assignment	
2. Absolute maximum ratings	
3. Electrical characteristics	
a. Typical operating conditions	
b. Display color vs. input data signals	
c. Input signal timing	
d. Display position	
e. Backlight driving conditions	
C. Optical specifications	
D. Reliability test items	
E. Safety	
F. Display quality	
G. Handling precaution	
H. Label	
I. Mechanical drawings	
Appendix	

www.jxlcd.com
INNOLUX General
版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

A. General specification

NO.	Item	Specification	Remark
1	Display resolution (pixel)	1366(H) X 768(V), WXGA Resolution	
2	Active area (mm)	409.8(H) X 230.4(V)	
3	Screen size (inch)	18.5 inches diagonal	
4	Pixel pitch (mm)	0.3(H) X 0.3(V)	
5	Color configuration	R, G, B vertical stripe	
6	Overall dimension (mm)	430.37 (W) X 254.6 (H) X 16.5 (D) (Max.)	
7	Weight (g)	2100 (max)	
8	Surface treatment	Anti-glare, Haze=25%, Hard coating (3H)	Glare Optional
9	Input signal interface	One channel LVDS interface	
10	Display colors	16.7M (6 bit with Hi-FRC)	
11	Color Saturation	72% NTSC	
12	Optimum viewing direction	6 o'clock	
13	RoHS & Halogen Free	RoHS compliance & Halogen Free	

www.jxlcd.com

版權屬於群創所有, 禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

B. Electrical specifications

1.Pin assignment

Connector

JAE FI-XB30SSL-HF15 or mechanical interface equivalent connector.

Pin	Name	Description
1	NC	Not connection, this pin should be open.
2	NC	Not connection, this pin should be open.
3	NC	Not connection, this pin should be open.
4	GND	Ground
5	RX0-	Negative LVDS differential data input. Channel 0
6	RX0+	Positive LVDS differential data input. Channel 0
7	GND	Ground
8	RX1-	Negative LVDS differential data input. Channel 1
9	RX1+	Positive LVDS differential data input. Channel 1
10	GND	Ground
11	RX2-	Negative LVDS differential data input. Channel 2
12	RX2+	Positive LVDS differential data input. Channel 2
13	GND	Ground
14	RXCLK-	Negative LVDS differential clock input.
15	RXCLK+	Positive LVDS differential clock input.
16	GND	Ground
17	RX3-	Negative LVDS differential data input. Channel 3
18	RX3+	Positive LVDS differential data input. Channel 3
19	GND	Ground
20	NC	Not connection, this pin should be open.
21	NC	Not connection, this pin should be open.
22	NC	Not connection, this pin should be open.
23	GND	Ground
24	GND	Ground
25	GND	Ground
26	Vcc	+5.0V power supply
27	Vcc	+5.0V power supply
28	Vcc	+5.0V power supply
29	Vcc	+5.0V power supply
30	Vcc	+5.0V power supply

www.jxlcd.com

版權屬於群創所有, 禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

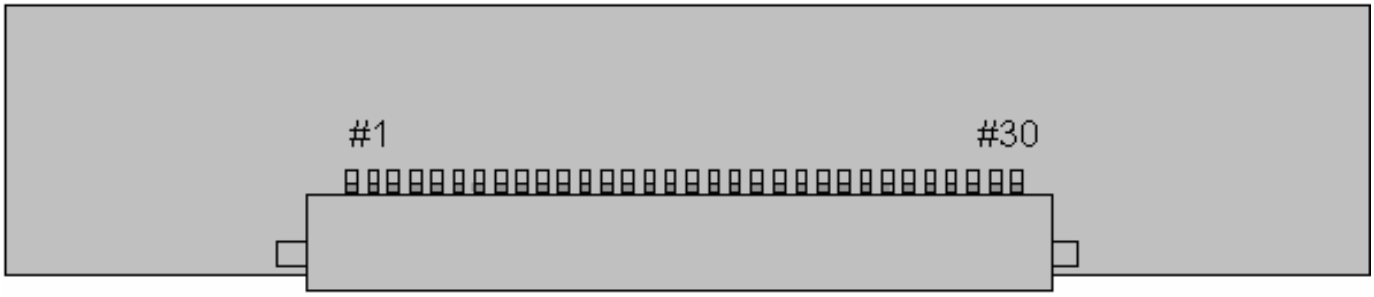

Rear view of LCM

www.jxlcd.com
INNOLUX General
版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

2. Absolute maximum ratings

Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Power voltage	V_{cc}	-0.3	-	6.0	V	At 25°C
Input signal voltage	V_{LH}	-0.3	-	4.3	V	At 25°C
Operating temperature	Top	0	-	50	°C	Note 1
Storage temperature	T_{ST}	-20	-	60	°C	Note 2
CCFL Current	ICFL	2	7.5	8	[mA]	

Note 1: The relative humidity must not exceed 90% non-condensing at temperatures of 40°C or less. At temperatures greater than 40°C, the wet bulb tem perature must not exceed 39°C.

Note 2: The unit should not be exposed to corrosive chemicals.

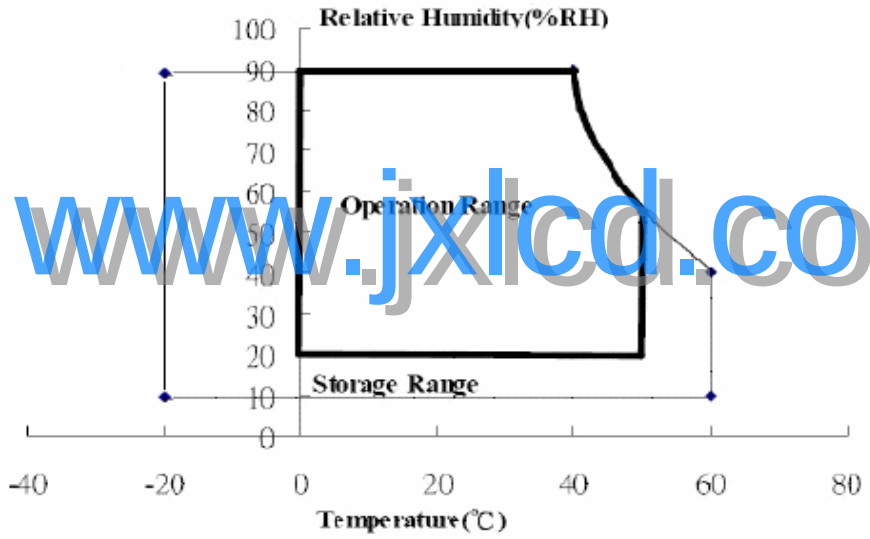

www.jxlcd.com

版權屬於群創所有, 禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

3. Electrical characteristics

a. Typical operating conditions

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
Input Voltage		V_{cc}	4.5	5	5.5	V	
Permissive Power Input Ripple		V_{RF}	-	-	0.15	V	
Input Current	Black	I_{cc}	-	700	1000	mA	Note 1
	White	I_{cc}	-	500	700		Note 2
	Mosaic	I_{cc}	-	700	1000		Note 3
Rush Current		I_{Rush}	-	1.6	3	A	Note 4
Logic Input Voltage LVDS: IN+, IN-	Common Mode Voltage	VCM	-	1.2	-	V	
	Differential Input Voltage	VID	100	-	600	mV	
	Threshold Voltage (High)	VTH	-	-	100	mV	Note 5
	Threshold Voltage (Low)	VTL	-100	-	-	mV	Note 5

Note 1 : The specified current is under the Vcc =5V, 25 °C, fv=60Hz (frame frequency) condition whereas black pattern is displayed.

Note 2 : The specified current is under the Vcc =5V, 25 °C, fv=60Hz (frame frequency) condition whereas white pattern is displayed.

Note 3 : The specified current is under the Vcc =5V, 25 °C, fv=60Hz (frame frequency) condition whereas mosaic pattern(black & white [8*6]) is displayed.

White : 255 Gray

Black : 0 Gray

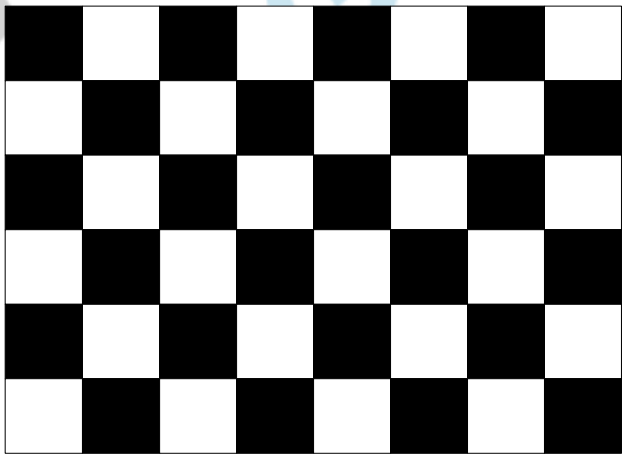

www.jxlcd.com
版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

Note 4 : test condition :'

(1) V_{DD} = 5 V, V_{DD} rising time = 470 μs ± 10%

(2) Pattern: Mosaic pattern

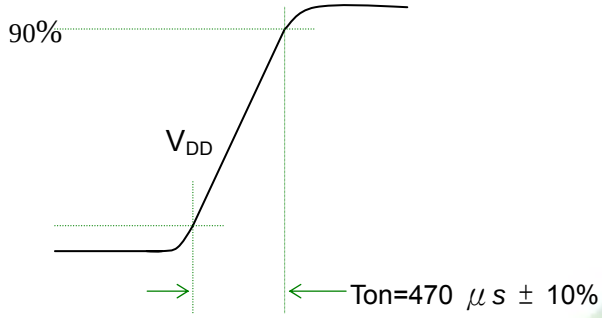

(3) Test circuit

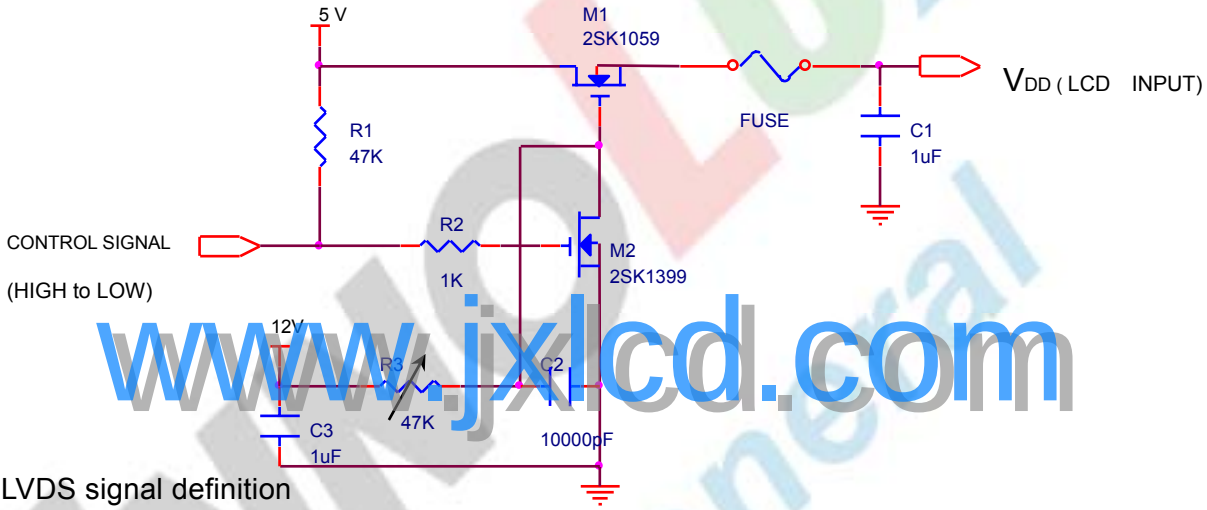

www.jxlcd.com

Note 5: LVDS signal definition

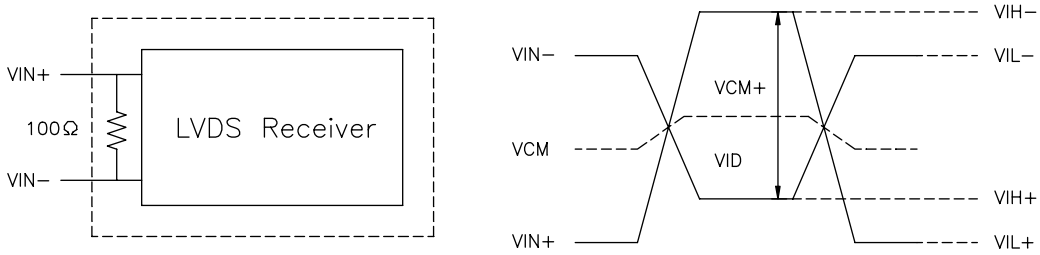

VIN_+ = Positive differential DATA & CLK Input

VIN- = Negative differential DATA & CLK Input

VID = VIN_+ – VIN- ,

ΔVCM = | VCM_+–VCM- | ,

ΔVID = | VID_+–VID- | ,

VID+ = | VIH_+–VIH- | ,

VID- = | VIL_+–VIL- | ,

VCM = (VIN_+ +VIN-)/2,

VCM+ = (VIH_+ +VIH-)/2,

VCM- = (VIL_+ +VIL-)/2,

版權所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

Note 6 : Power on sequence for LCD V_{DD}

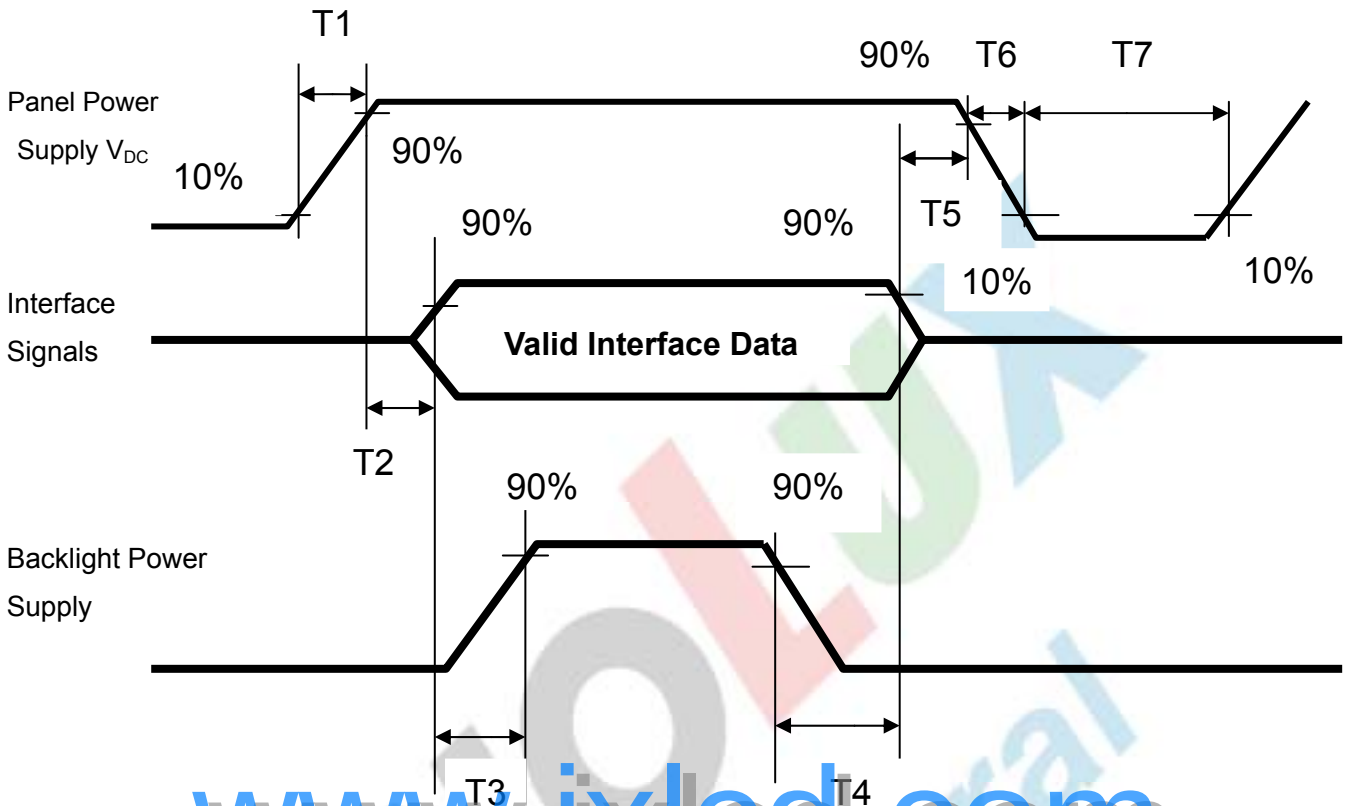

www.jxlcd.com

Parameter	Value			Unit
	Min	Typ	Max	ms
T1	0.1	-	10	ms
T2	0	30	50	ms
T3	200	250	-	ms
T4	100	250	-	ms
T5	0	20	50	ms
T6	0.1	-	-	ms
T7	1000	-	-	ms

版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

b. Display color vs. input data signals

The brightness of each primary color (red, green and blue) is based on the 8-bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Color		Input color data																							
		Red								Green								Blue							
		MSB							LSB	MSB							LSB	MSB							LSB
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	1	1	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Red(000) dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(001)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(002)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255) bright	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Green	Green(000)dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Green(002)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(253)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green(255)bright	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Blue	Blue(000) dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(002)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue(255) bright	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1

www.jxlcd.com

版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

c. Input signal timing

Support Input Timing Table

	Item	Description	Min.	Typ.	Max.	Unit
Clock	Dclk	period	10.5	13.2	15.9	nS
		frequency	62.9	75.4	95.6	MHz
Vertical	T_{V_TOTAL}	V total line number	786	806	900	T_{H_TOTAL}
	T_{V_DATA}	Data duration	—	768	—	T_{H_TOTAL}
	T_{VB}	V-blank	18	38	132	T_{H_TOTAL}
	f_V	frequency	50	60	76	Hz
Horizontal	T_{H_TOTAL}	H total pixel number	1400	1560	1800	DClk
	T_{H_DATA}	Data duration	—	1366	—	DClk
	T_{HB}	H-blank	40	194	434	DClk

Note: Because this module is operated by DE only mode, Hsync and Vsync input signals should be set to low Logic level or ground. Otherwise, this module would operate abnormally.

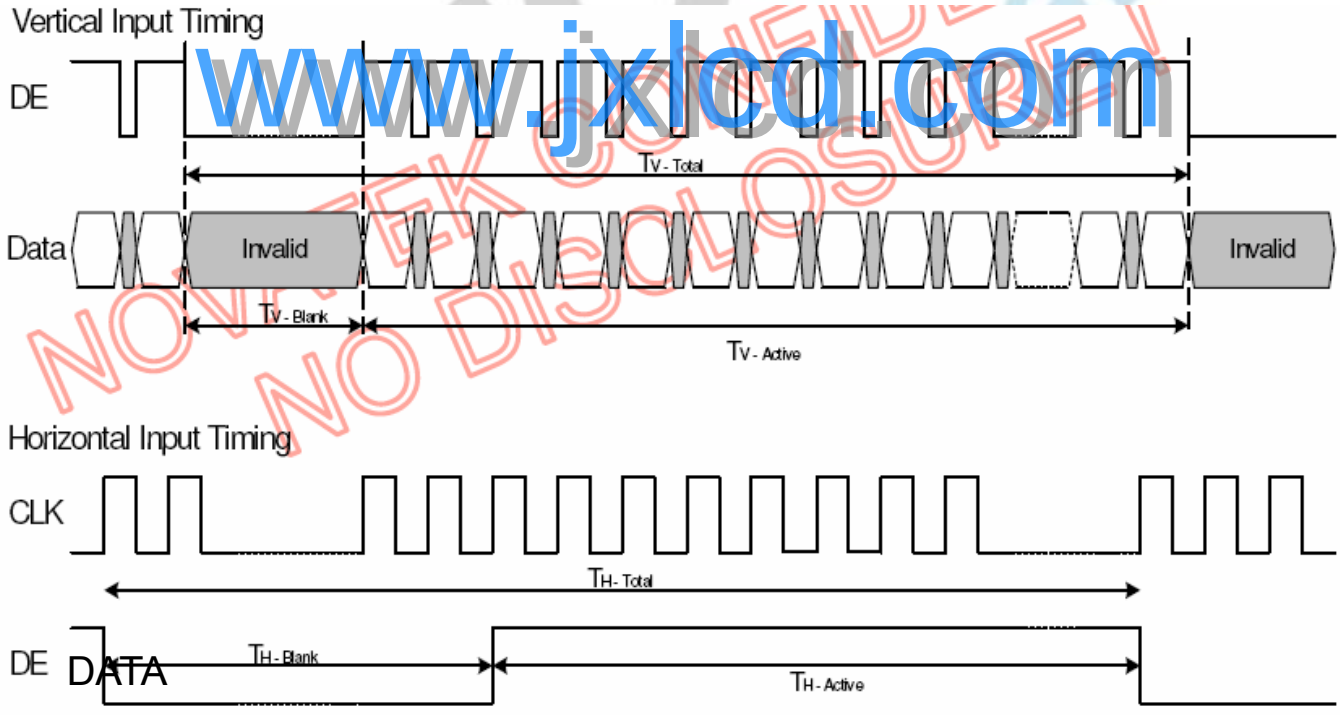

www.jxlcd.com
NOVATEK CONFIDENTIAL
NO DISCLOSURE!
版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

d. Display Position

D(1, 1)	D(2, 1)	……	D(683, 1)	……	D(1365, 1)	D(1366, 1)
D(1, 2)	D(2, 2)	……	D(683, 2)	……	D(1365, 2)	D(1366, 2)
⋮		……	⋮	……	⋮	⋮
D(1, 384)	D(2, 384)	……	D(683, 384)	……	D(1365, 384)	D(1366, 384)
⋮		……	⋮	……	⋮	⋮
D(1, 767)	D(2, 767)	……	D(683, 767)	……	D(1365, 767)	D(1366, 767)
D(1, 768)	D(2, 768)	……	D(683, 768)	……	D(1365, 768)	D(1366, 768)

e. Backlight driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark	Remark
Lamp voltage	VL	-	700	-	Vrms	I=7.5mA	Note 1, 2
Lamp operation current	IL	2	7.5	8	mArms		Note 3
Lamp starting voltage	VLstart	1300	-	-	Vrms	T = 25°C	Note 4,5,6,7
		1700	-	-		T = 0°C	Note 4,5,6,7
Frequency	F	40	-	60	KHZ		Note 7
Lamp life time		50000	-	-	Hr		Note 8

Note: The waveform of the voltage output of inverter must be area-symmetric and the design of the inverter must have specifications for the modularized lamp. The performance of the Backlight, such as lifetime or brightness, is greatly influenced by the characteristics of the DC-AC inverter for the lamp. All the parameters of an inverter should be carefully designed to avoid producing too much current leakage from high voltage output of the inverter. When designing or ordering the inverter please make sure that a poor lighting caused by the mismatch of the Backlight and the inverter (miss-lighting, flicker, etc.) never occurs. If the above situation is confirmed, the module should be operated in the same manners when it is installed in your instrument.

Note 1: Specified values are for a single lamp.

Note 2: Operating voltage is measured at the condition of Ta = 25±2°C. The variance of the voltage is ±10%.

Note 3: The degree of unbalance: less than 10%

The ratio of wave height: less than $\sqrt{2} \pm 10\%$

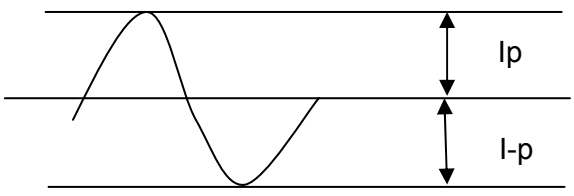

Ip: high side peak

I-p: low side peak

The degree of unbalance = |Ip-I-p| /Irms*100(%)

The ratio of wave height = Ip (or I-p)/Irms

Lamp should be completely turned on.

www.jxlcd.com
版权所有，禁止任何未经授权的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

Note 4: Test equipment: AS-114B

Note 5: The voltage shown above should be applied to the lamp for more than 1 second after startup. Otherwise, the lamp may not be turned on normally.

Note 6: Inverter should provide more than min. value, and then lamp could be completely turned on.

Note 7: Lamp frequency may produce interference with horizontal synchronous frequency and this may cause line flow on the display. Therefore lamp frequency shall be detached from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

Note 8: Life time (Hr) is defined as the time when brightness of a lamp unit itself becomes 50% or less than its original value at the condition of Ta = 25±2°C and I_L = 7.5mArms.

Backlight connecter: 3500IHS-02L

Pin no.	Symbol	Function	Remark
1	VIH	Lamp high voltage input	Cable color: Pink
2	VIL	Lamp low voltage input	Cable color: White
3	VIH	Lamp high voltage input	Cable color: Blue
4	VIL	Lamp low voltage input	Cable color: Black

www.jxlcd.com

版權屬於群創所有, 禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

C. Optical specifications

Item	Symbol	Condition	Specification			Unit	Remark
			Min.	Typ.	Max.		
Response time	Tr	θ= 0°	-	1.5	4	ms	Note 4
	Tf		-	3.5	6		
	Tr+Tf		-	5	10		
Contrast ratio	CR	θ= 0°	700	1000	-		Note 3,5
Viewing angle	Top	CR≧10	70	80	-	deg.	Note 3,5,7
		CR≧5	75	85			
	Bottom	CR≧10	70	80	-		
		CR≧5	75	85			
	Left	CR≧10	75	85	-		
		CR≧5	75	85			
	Right	CR≧10	75	85	-		
		CR≧5	75	85			
Brightness (Center)	YL		200	250	-	nit	Note 3,6
Color chromaticity(CIE)	Wx	θ= 0°	-0.03	0.313	+0.03		Note 3
	Wy			0.329			
	Rx			0.640			
	Ry			0.349			
	Gx			0.284			
	Gy			0.617			
	Bx			0.142			
	By			0.067			
White uniformity (9)	δ_W		0.75	0.80	-		Note 3,8
Cross talk	Ct		-	-	2%		Note 9

Note 1: Ambient temperature = 25°C.
Note 2: To be measured in dark room after backlight warm up 30 minutes.
Note 3: To be measured with a viewing cone of 2°by Topcon luminance meter BM-5A.
Note 4: Definition of response time:

The output signals of BM-7 are measured when the input signals are changed from “Black” to “White” (falling time) and from “White” to “Black” (rising time), respectively. The response time interval is between the 10% and 90% of amplitudes. Refer to figure as below.

www.jxlcd.com
版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

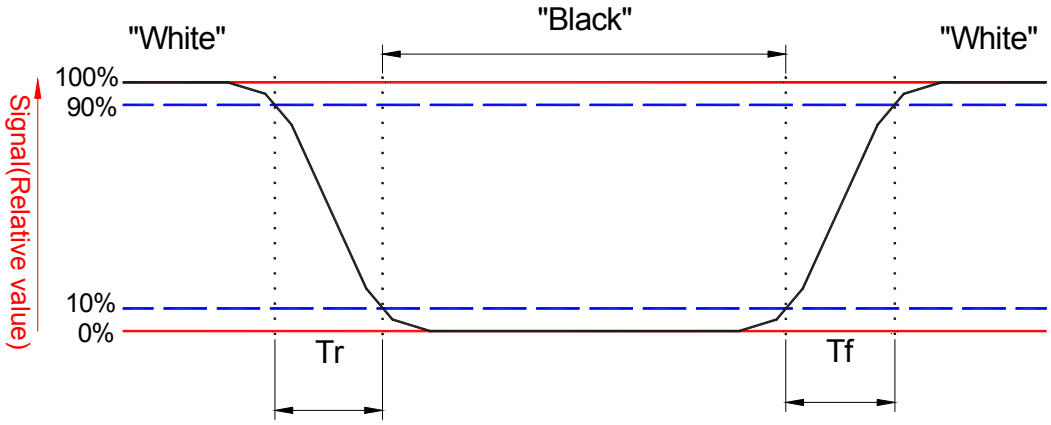

Note 5: Definition of contrast ratio:

Contrast ratio is calculated by the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "white" state}}{\text{Brightness on the "black" state}}$$

Note 6: Driving conditions for CCFL: I_L= 7.5 mA, 50 KHz Frequency.

Note 7: Definition of viewing angle

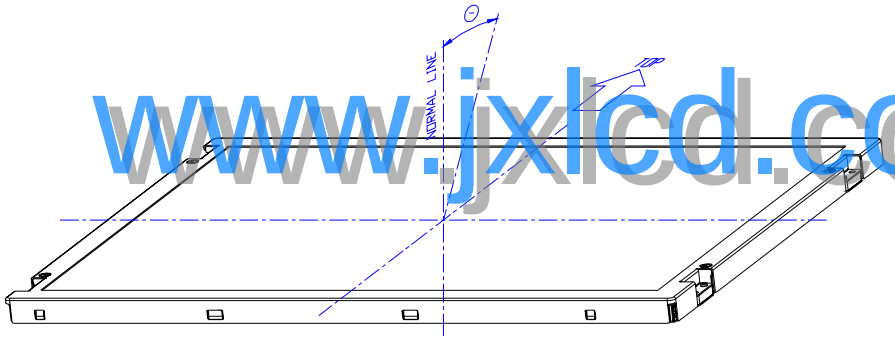

www.jxlcd.com

Note 8: Definition white uniformity:

Luminance are measured at the following nine points (P1~P9).

$$\delta_W = \frac{\text{Minimum Brightness of nine points (P1~P9).}}{\text{Maximum Brightness of nine points (P1~P9).}}$$

版權屬於群創所有, 禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

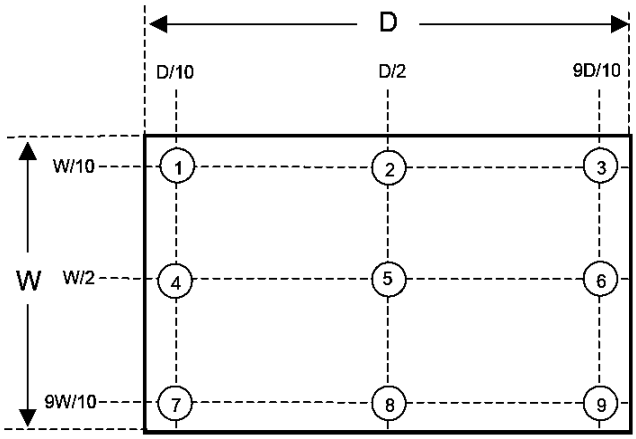

Note 9:

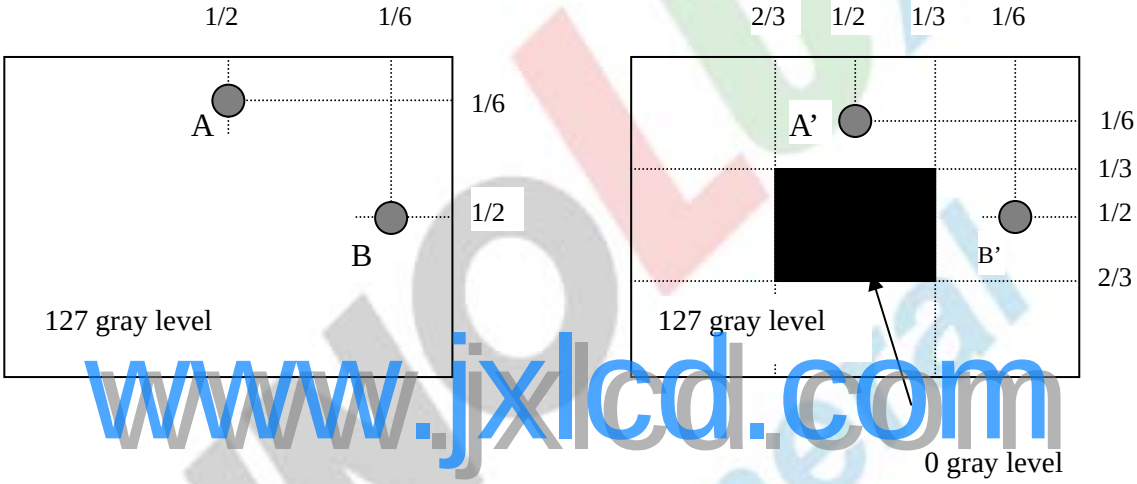

www.jxlcd.com

$| L_A - L_{A'} | / L_A \times 100\% = 2\%$ max., L_A and $L_{A'}$ are brightness at location A and A'

$| L_B - L_{B'} | / L_B \times 100\% = 2\%$ max., L_B and $L_{B'}$ are brightness at location B and B'

Note 10: Optical characteristic measurement setup.

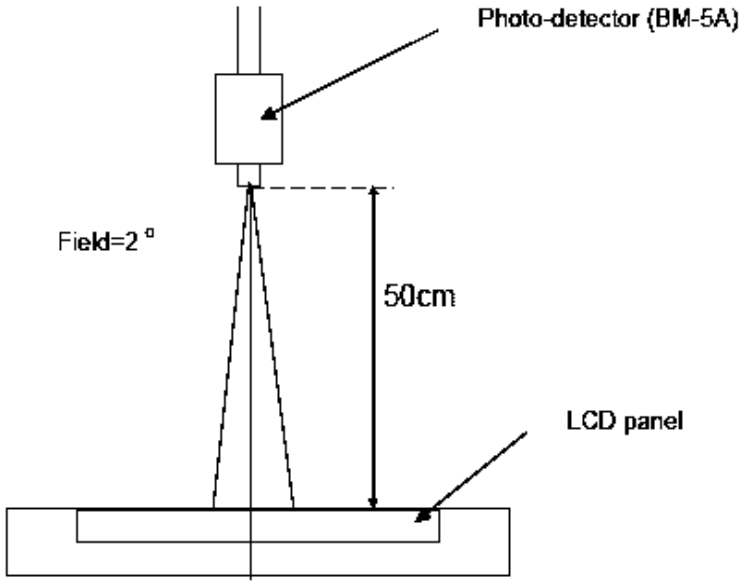

版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

D. Reliability test items

Test Item	Test Condition	Judgment	Remark
High temperature storage	60°C, 240Hrs	Note 1	Note 2
Low temperature storage	-20°C, 240Hrs	Note 1	Note 2
High temperature & high humidity operation	40°C, 90%RH, 240Hrs (No condensation)	Note 1	Note 2
High temperature operation	50°C, 240Hrs	Note 1	Note 2
Low temperature operation	0°C, 240Hrs	Note 1	Note 2
Thermal Shock (non-operation)	-20°C/1Hr ~60°C/1Hr , 100cycles	Note 1	Note 2
Electrostatic discharge (ESD) (non-operation)	Contact:+/-8kV, 150pF(330ohms), 25 times/1 point, 1 time/1 sec Air discharge:+/-15kV, 150pF(330ohms), 25 times/1 point, 1 time/1 sec	Note 1	Note 2
Vibration (non-operation)	Vibration level : 1.5G Bandwidth : 10-300Hz Waveform : sine wave, sweep rate : 10min 30 min for each direction X, Y, Z (1.5 Hrs in total)	Note 1	Note 2
Mechanical Shock (non-operation)	Shock level : 50G, 11ms Waveform : Half sine wave Direction : ±X, ±Y, ±Z One time each direction	Note 1	Note 2
MTBF Demonstration	50,000 hours with confidence level 90%	Note 1	Note 3

www.jxlcd.com

Note1: Pass: Normal display image with no obvious non-uniformity and no line defect.
Partial transformation of the module parts should be ignored.
Fail: No display image, obvious non-uniformity, or line defects.

Note2: Evaluation should be tested after storage at room temperature for one hour.

Note 3: The MTBF calculation is based on the assumption that the failure rate distribution meets the Exponential Model (CCFL excluded)

版權屬於群創所有, 禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

E. Safety

(1) Sharp Edge Requirements

There will be no sharp edges or corners on the display assembly that could cause injury.

(2) Materials

a. Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible InnoLux Toxicologist.

b. Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process. The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

c. Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

F. Display quality

The display quality of the color TFT-LCD module should be in compliance with the Innolux's Incoming inspection standard.

G. Handling precaution

The Handling of the TFT-LCD should be in compliance with the Innolux's handling principle standard.

www.jxlcd.com

版權屬於群創所有, 禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

H. Label

(1) Module Label

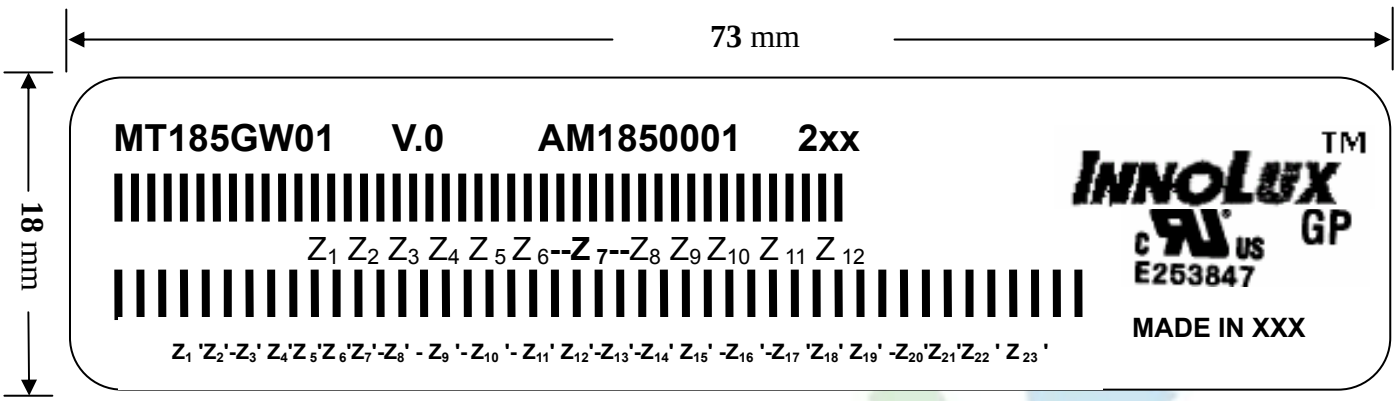

(a) Model Number: MT185GW01

(b) Version: V.2

(c) Serial ID I: Z_1 Z_2 Z_3 Z_4 Z_5 Z_6 Z_7 Z_8 Z_9 Z_{10} Z_{11} Z_{12}

www.jxlcd.com

Serial ID includes the information as below:

1. Manufactured Date: Year: 0~9, for 2000~2009
2. Month: 1~9 & A~C for Jan.~Dec.
3. Date: 1~9 & A~Z (exclude I, O, Q, U) for 1st~31th
4. Code of grade: 1, 2, 3, 5, E
5. Serial No: Module manufacture sequence no

(d) Serial ID II (INL internal use)

版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

(2) Carton Label

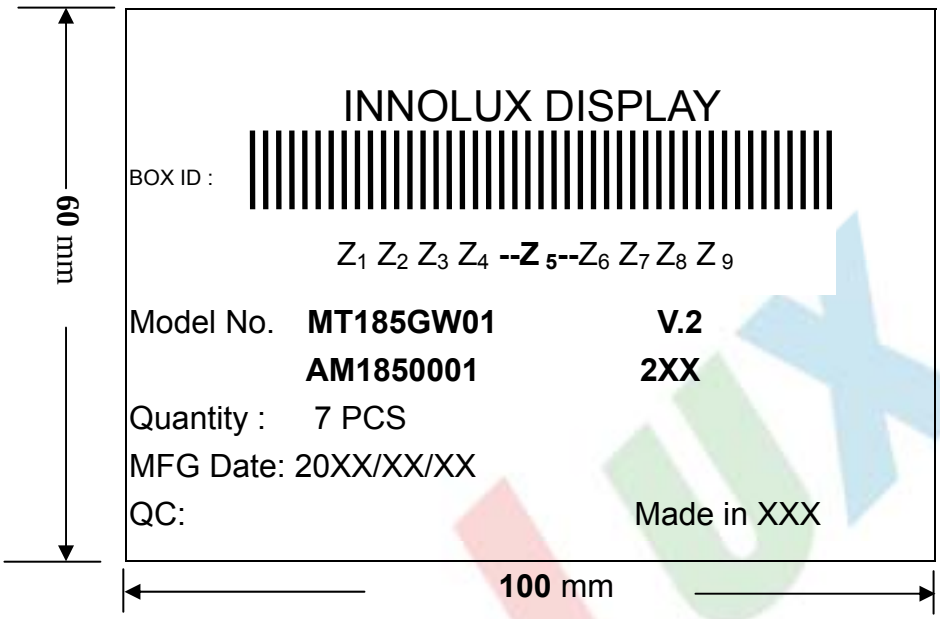

(a) Model Number: MT185GW01

(b) Version: V.2

(c) Packing quantity: 7 pcs

(d) Serial ID:

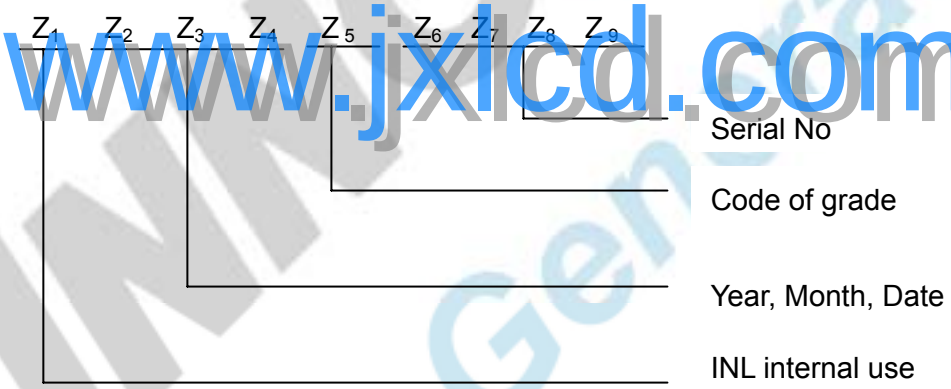

www.jxlcd.com

Serial ID includes the information as below:

(a) Manufactured Date: Year: 0~9, for 2000~2009

Month: 1~9 & A~C for Jan.~Dec.

Date: 1~9 & A~Z (exclude I, O, Q, U) for 1st~31th

(b) Code of grade: 1,2, 3, 5, E

(c) Serial No: Module packing sequence no

版權屬於群創所有，禁止任何未經授權的使用
The copyright belongs to INNOLUX. Any unauthorized use is prohibited.

I. ME Drawing

(1) Front view

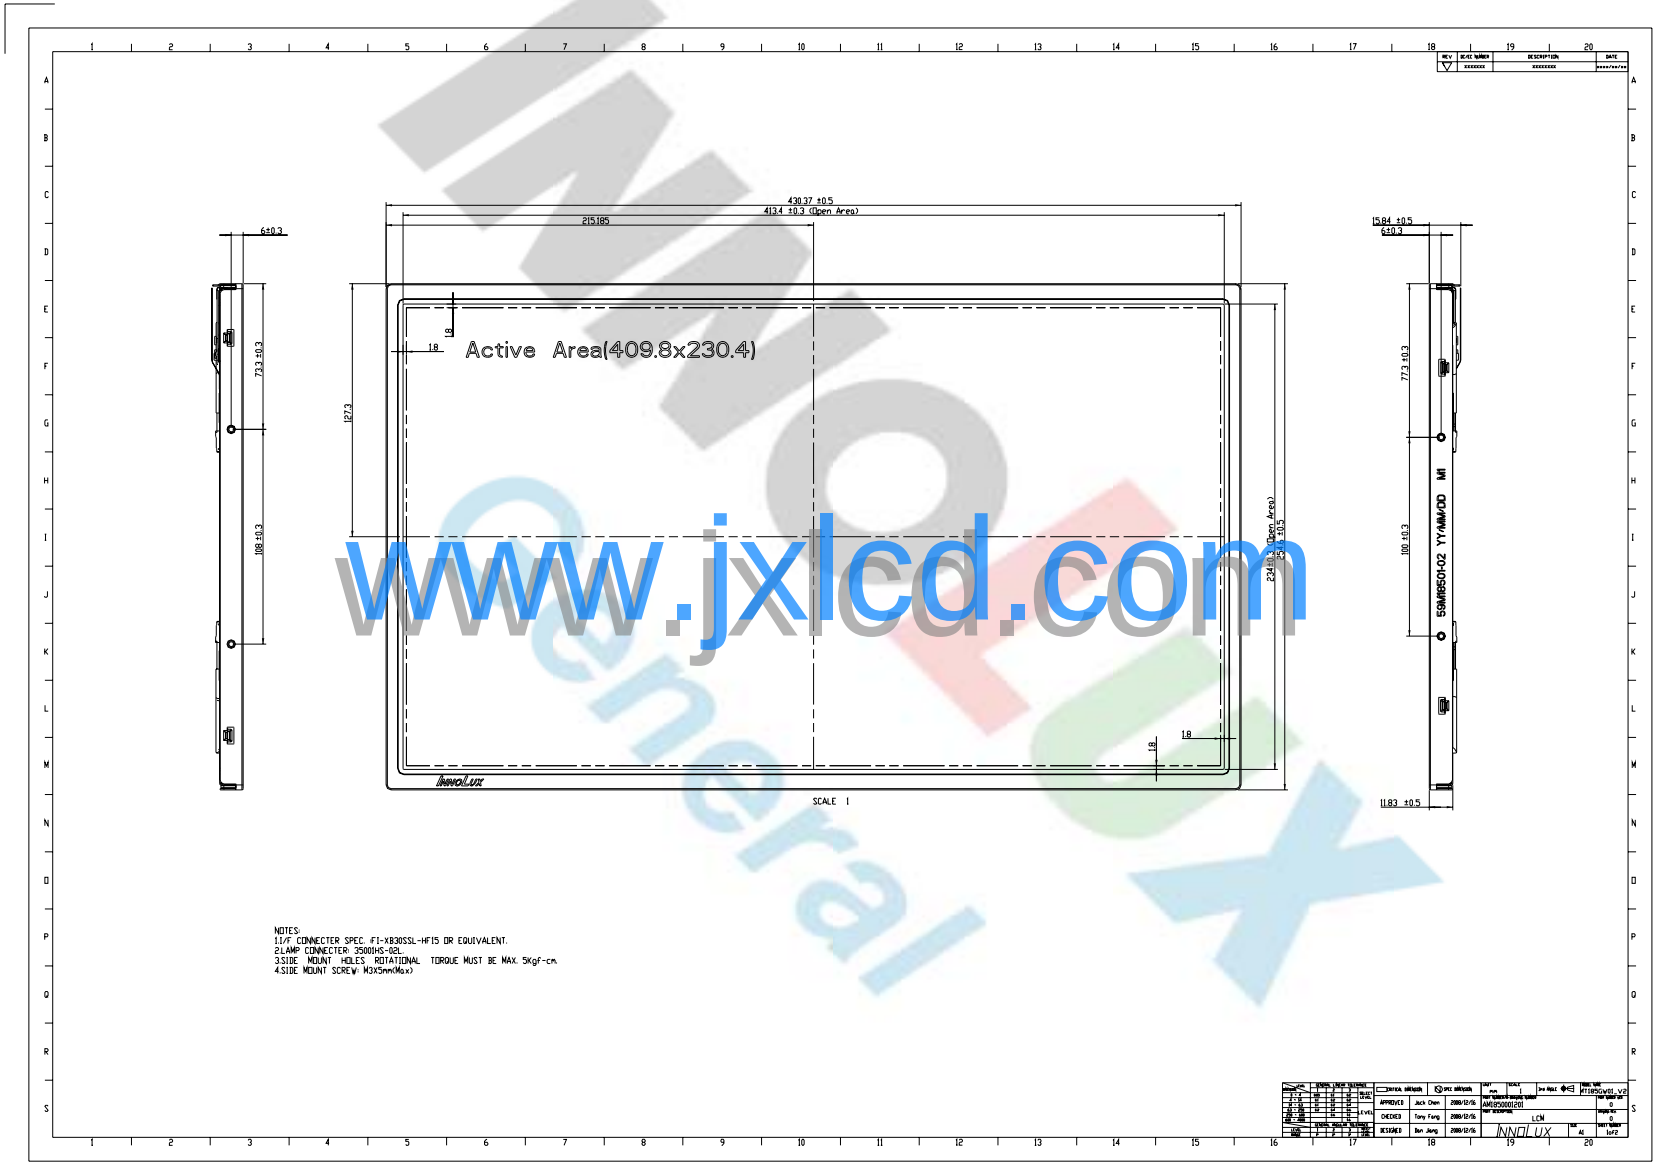

The copyright belongs to INNOLUX. Any unauthorized use is prohibited.
版權屬於群創所有，禁止在未經授權的情況下使用
www.jxlcd.com

(2) Back view

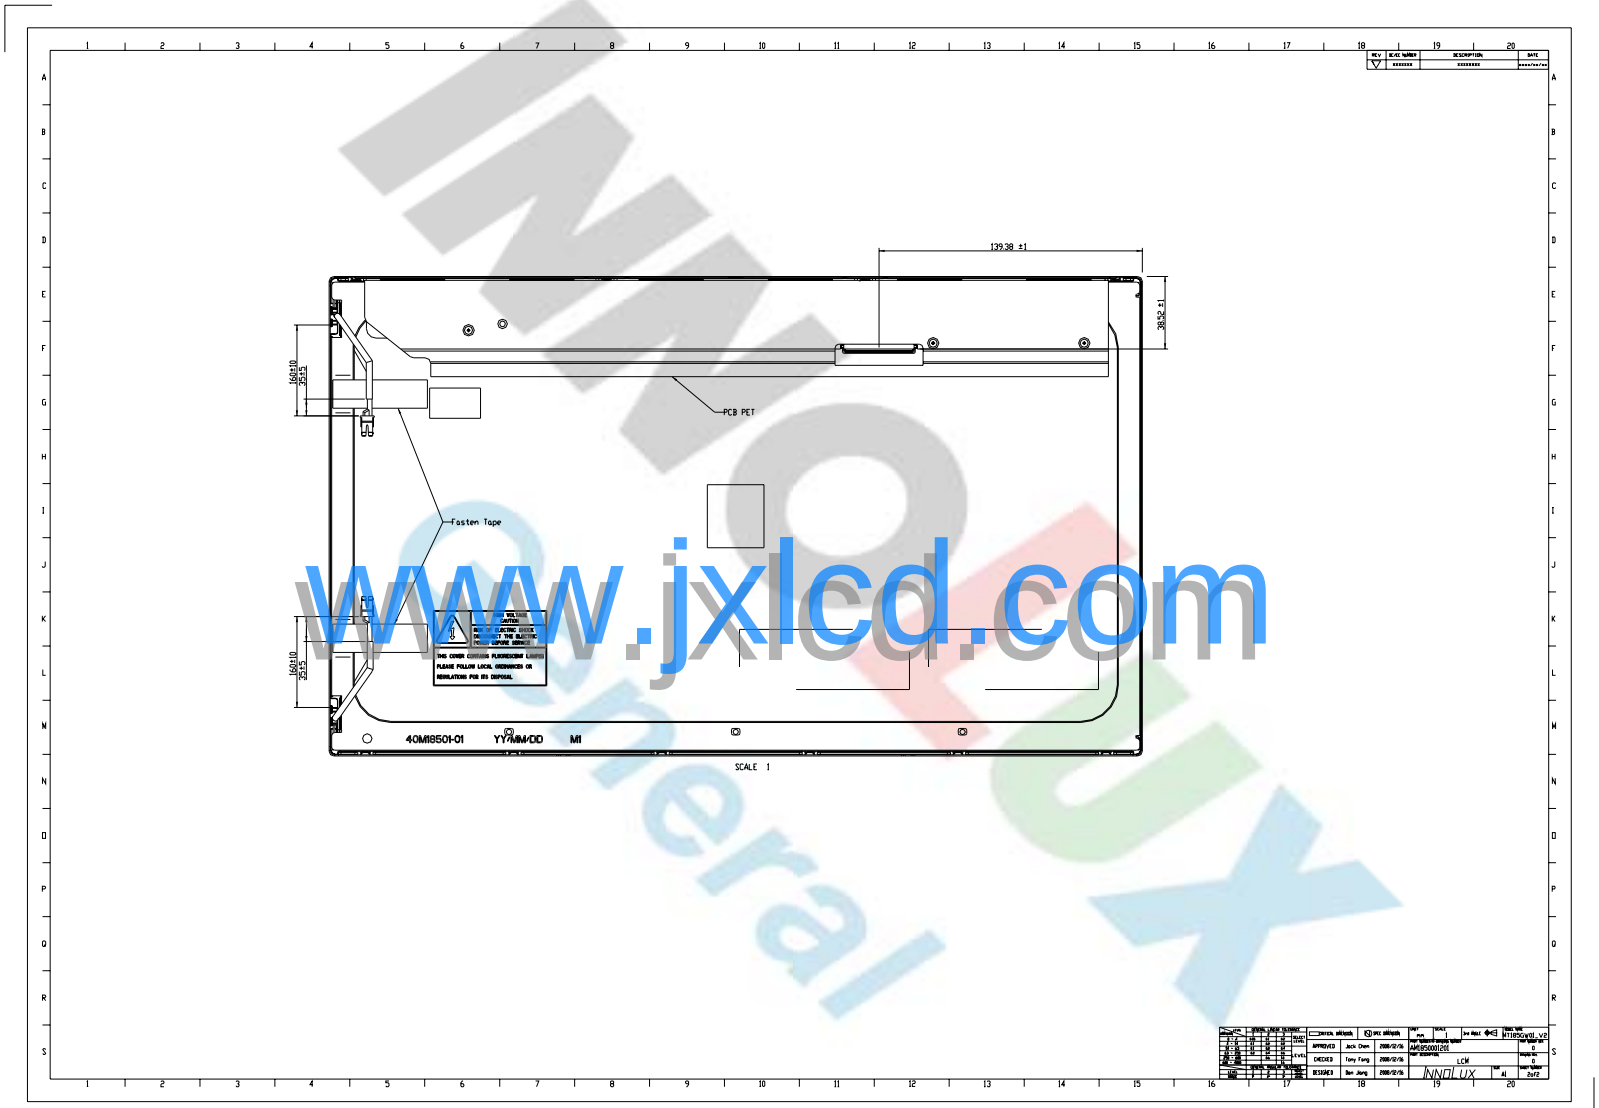

The copyright belongs to INNOLUX. Any unauthorized use is prohibited.
版權屬於群創所有，禁止任何未經授權的使用
www.jxlcd.com