

# SPEC

Spec No.	TQ3C-8EAF0-E1DDM16-01
Date	August 7, 2008

## **TYPE : TCG062HVLBC-G20**

< 6.2 inch HVGA transmissive color TFT with LED backlight,  
Constant current circuit for LED backlight and Touch panel>

### CONTENTS

1. Application
2. Construction and outline
3. Mechanical specifications
4. Absolute maximum ratings
5. Electrical characteristics
6. Optical characteristics
7. Interface signals
8. Input timing characteristics
9. Backlight characteristics
10. Design guidance for analog touch panel (T/P)
11. Lot number identification
12. Warranty
13. Precautions for use
14. Reliability test data
15. Outline drawing



KYOCERA CORPORATION  
KAGOSHIMA HAYATO PLANT  
LCD DIVISION

This specification is subject to change without notice.  
Consult Kyocera before ordering.

Original Issue Date	Designed by: Engineering dept.			Confirmed by: QA dept.	
	Prepared	Checked	Approved	Checked	Approved
April 3, 2008	<i>Td. Takumaru</i>	<i>W. Yano</i>	<i>Y. Matsumoto</i>	<i>S. Higashio</i>	<i>To. Ito</i>

Spec No.	Part No.	Page
TQ3C-8EAF0-E1DDM16-01	TCG062HVLBC-G20	-

---

## **Warning**

1. This Kyocera LCD module has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the module in such applications.
2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs, and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera modules in applications.

## **Caution**

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.

Spec No. TQ3C-8EAF0-E1DDM16-01	Part No. TCG062HVLBC-G20	Page -
-----------------------------------	-----------------------------	-----------

### Revision record

Date		Designed by : Engineering dept.			Confirmed by : QA dept.	
		Prepared	Checked	Approved	Checked	Approved
Aug. 7, 2008		<i>T. Takumori</i>	<i>W. Yano</i>	<i>Y. Matsumoto</i>	<i>S. Higashio</i>	<i>T. Ishi</i>
Rev.No.	Date	Page	Descriptions			
01	Aug. 7, 2008	1	3-1. Mechanical specifications of LCD ~Change "Mass"			
			3-2. Mechanical specifications of touch panel ~Delete ( )			
		3	5-1. LCD ~Delete ( )			
			5-2. Touch panel ~Delete ( )			
		4	6. Optical characteristics ~Delete( ) ~Change value			
		7	7-2. Pin assignment of touch panel ~Add "Touch panel side connector", "Recommended matching connector"			
		8	8-1. Timing characteristics ~Delete ( ) ~Change "H <sub>SYNC</sub> -V <sub>SYNC</sub> signal phase difference"			
		10	9. Backlight characteristics ~Delete ( )			
		15	15. Outline drawing ~Change drawing			

## 1. Application

This document defines the specification of TCG062HVLBC-G20. (RoHS Compliant)

## 2. Construction and outline

LCD	: Transmissive color dot matrix type TFT
Backlight system	: LED
Polarizer	: Glare treatment
Additional circuit	: Timing controller, Power supply (3.3V input) (with Constant current circuit for LED backlight)
Touch panel	: Analog type(Glass/Glass), Glare Anti-reflection treatment

## 3. Mechanical specifications

### 3-1. Mechanical specifications of LCD

Item	Specification	Unit
Outline dimensions	173 (W)× 70 (H) × 8.9Max (D)	mm
Active area	147.84 (W) × 55.44 (H) (15.8cm / 6.2 inch (Diagonal))	mm
Effective viewing area	149.8 (W) × 57.4 (H)	mm
Dot format	640×(B,G,R) (W) × 240 (H)	dot
Dot pitch	0.077 (W) × 0.231 (H)	mm
Base color *1	Normally White	-
Mass	145	g

\*1 Due to the characteristics of the LCD material, the color varies with environmental temperature.

### 3-2. Mechanical specifications of touch panel

Item	Specification	Unit
Input	Radius-0.8 stylus or Finger	-
Actuation Force	0.1~2.0	N
Transmittance	Typ. 85	%
Surface hardness	Pencil hardness 2H or more according	-

## 4. Absolute maximum ratings

### 4-1. Electrical absolute maximum ratings

Item	Symbol	Min.	Max.	Unit
Supply voltage for logic	V <sub>DD</sub>	0	4.0	V
Input signal voltage *1	V <sub>IN</sub>	-0.3	6.0	V
Supply voltage for backlight	V <sub>INB</sub>	0	6.0	V
Backlight ON-OFF	BLEN	0	V <sub>INB</sub>	V
Brightness adjust voltage	VBRT	0	V <sub>INB</sub>	V
Supply voltage for touch panel	V <sub>TP</sub>	0	6.0	V
Input current of touch panel	I <sub>TP</sub>	0	0.5	mA

\*1 Input signal : CK, R0~R5, G0~G5, B0~B5, H<sub>SYNC</sub>, V<sub>SYNC</sub>, ENAB, R/L, U/D

### 4-2. Environmental absolute maximum ratings

Item	Symbol	Min.	Max.	Unit
Operating temperature *1	T <sub>OP</sub>	-20	70	°C
Storage temperature *2	T <sub>STO</sub>	-30	80	°C
Operating humidity *3	H <sub>OP</sub>	10	*4	%RH
Storage humidity *3	H <sub>STO</sub>	10	*4	%RH
Vibration	-	*5	*5	-
Shock	-	*6	*6	-

\*1 Operating temperature means a temperature which operation shall be guaranteed. Since display performance is evaluated at 25°C, another temperature range should be confirmed.

\*2 Temp. = -30°C < 48h, Temp. = 80°C < 168h

Store LCD panels at normal temperature/humidity. Keep them free from vibration and shock. An LCD panel that is kept at a low or a high temperature for a long time can be defective due to other conditions, even if the low or high temperature satisfies the standard.

(Please refer to "Precautions for Use" for details.)

\*3 Non-condensing

\*4 Temp. ≤ 40°C, 85%RH Max.

Temp. > 40°C, Absolute humidity shall be less than 85%RH at 40°C.

\*5

Frequency	10~55 Hz	Acceleration value (0.3~9 m/s <sup>2</sup> )
Vibration width	0.15mm	
Interval	10-55-10 Hz	1 minutes

2 hours in each direction X, Y, Z (6 hours total)

EIAJ ED-2531

\*6 Acceleration: 490 m/s<sup>2</sup>, Pulse width: 11 ms

3 times in each direction: ±X, ±Y, ±Z

EIAJ ED-2531



## 6. Optical characteristics


Measuring spot =  $\phi$  6.0mm, Temp. = 25°C

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Response time	Rise	$\tau_{\text{r}}$	$\theta = \phi = 0^{\circ}$	-	10	-	ms
	Down	$\tau_{\text{d}}$	$\theta = \phi = 0^{\circ}$	-	15	-	ms
Viewing angle range View direction : 6 o'clock (Gray inversion)		$\theta_{\text{UPPER}}$	$\text{CR} \geq 5$	-	65	-	deg.
		$\theta_{\text{LOWER}}$		-	80	-	
		$\phi_{\text{LEFT}}$		-	80	-	deg.
		$\phi_{\text{RIGHT}}$		-	80	-	
Contrast ratio		CR	$\theta = \phi = 0^{\circ}$	300	500	-	-
Brightness		L	IF=15mA/Line	175	255	-	cd/m <sup>2</sup>
Chromaticity coordinates	Red	x	$\theta = \phi = 0^{\circ}$	0.55	0.60	0.65	-
		y		0.31	0.36	0.41	
	Green	x	$\theta = \phi = 0^{\circ}$	0.31	0.36	0.41	
		y		0.52	0.57	0.62	
	Blue	x	$\theta = \phi = 0^{\circ}$	0.10	0.15	0.20	
		y		0.08	0.13	0.18	
	White	x	$\theta = \phi = 0^{\circ}$	0.28	0.33	0.38	
		y		0.30	0.35	0.40	


### 6-1. Definition of contrast ratio

$$CR(\text{Contrast ratio}) = \frac{\text{Brightness with all pixels "White"}}{\text{Brightness with all pixels "Black"}}$$


### 6-2. Definition of response time

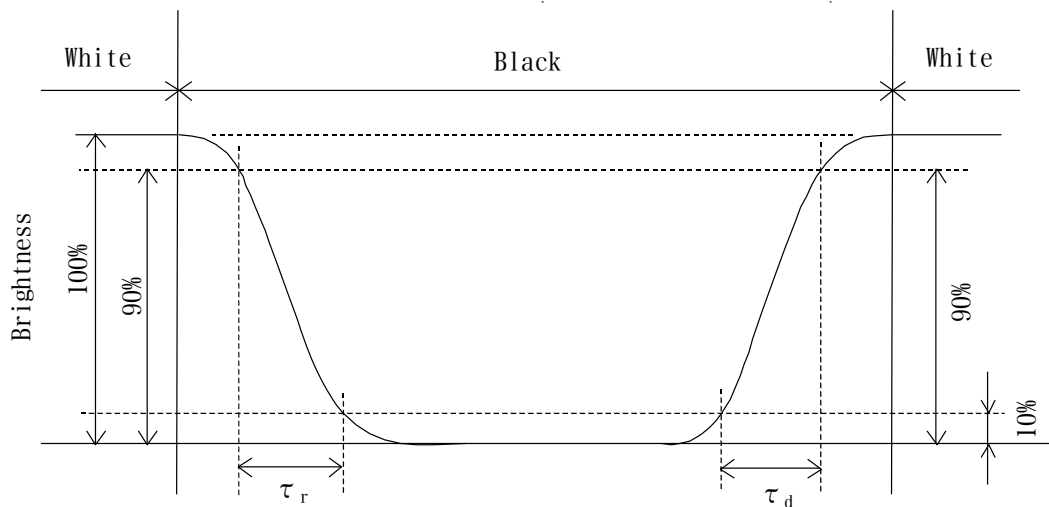

### 6-3. Definition of viewing angle

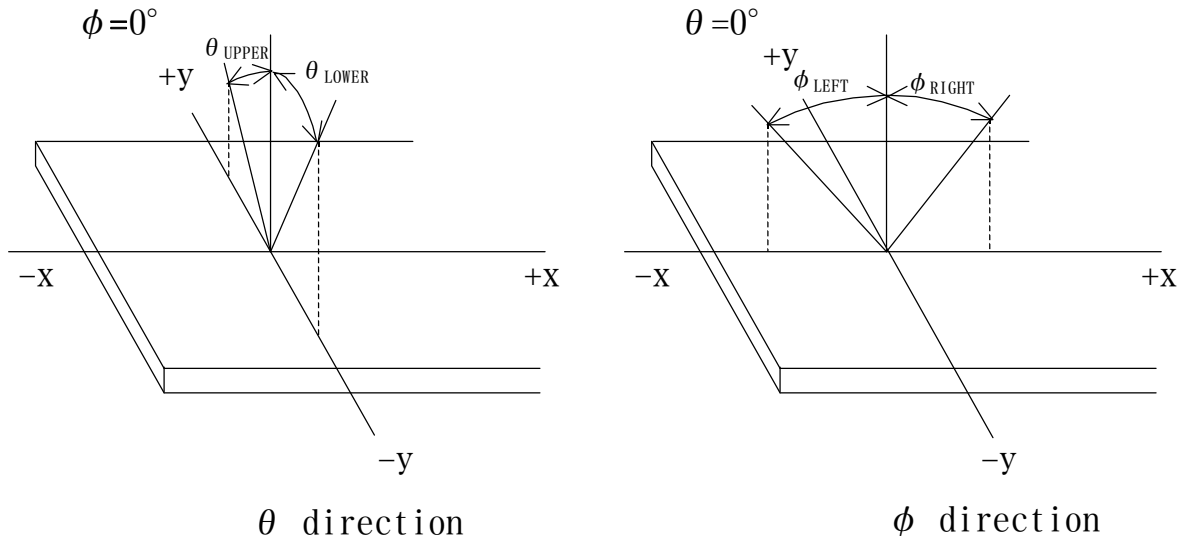

### 6-4. Brightness measuring points

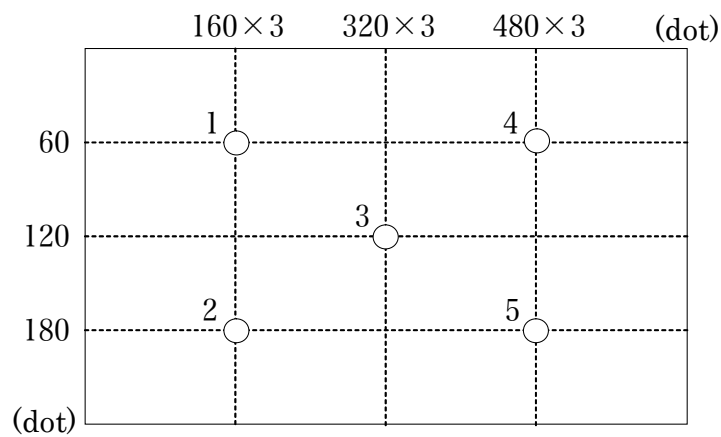

- 1) Rating is defined on the average in the viewing area.
- 2) Measured 30 minutes after the LED is powered on. (Ambient temp. = 25°C)



## 7. Interface signals

### 7-1. Pin assignment of LCD panel and LED

No.	Symbol	Description	I/O	Note
1	GND	GND	-	
2	CK	Clock signal for sampling each data signal	I	
3	H <sub>SYNC</sub>	Horizontal synchronous signal (negative)	I	
4	V <sub>SYNC</sub>	Vertical synchronous signal (negative)	I	
5	GND	GND	-	
6	R0	RED data signal (LSB)	I	
7	R1	RED data signal	I	
8	R2	RED data signal	I	
9	R3	RED data signal	I	
10	R4	RED data signal	I	
11	R5	RED data signal (MSB)	I	
12	GND	GND	-	
13	G0	GREEN data signal (LSB)	I	
14	G1	GREEN data signal	I	
15	G2	GREEN data signal	I	
16	G3	GREEN data signal	I	
17	G4	GREEN data signal	I	
18	G5	GREEN data signal (MSB)	I	
19	GND	GND	-	
20	B0	BLUE data signal (LSB)	I	
21	B1	BLUE data signal	I	
22	B2	BLUE data signal	I	
23	B3	BLUE data signal	I	
24	B4	BLUE data signal	I	
25	B5	BLUE data signal (MSB)	I	
26	GND	GND	-	
27	ENAB	Signal to settle the horizontal display position (positive)	I	*1
28	V <sub>DD</sub>	3.3V power supply	-	
29	V <sub>DD</sub>	3.3V power supply	-	
30	R/L	Horizontal display mode select signal H : Normal , L : Left / Right reverse mode	I	*2
31	U/D	Vertical display mode select signal H : Normal , L : Up / Down reverse mode	I	
32	NC	No connect	-	
33	V <sub>INB</sub>	Power supply for LED backlight	-	
34	V <sub>INB</sub>	Power supply for LED backlight	-	
35	V <sub>INB</sub>	Power supply for LED backlight	-	
36	BLEN	Backlight ON-OFF (H : ON , L : OFF)	-	
37	VBRT	Brightness adjust voltage	-	
38	GNDB	GND for LED backlight	-	
39	GNDB	GND for LED backlight	-	
40	GNDB	GND for LED backlight	-	

LCD connector : IMSA-9681S-40A-GF (IRISO)

Recommended matching FFC or FPC : 0.5mm pitch

\*1 The horizontal display start timing is settled in accordance with a rising timing of ENAB signal.  
In case ENAB is fixed "Low", the horizontal start timing is determined.  
Don't keep ENAB "High" during operation.

\*2




R/L = H  
U/D = H



R/L = L  
U/D = H



R/L = H  
U/D = L



R/L = L  
U/D = L

## 7-2. Pin assignment of touch panel

No.	Symbol	Description
1	xR	x-Right terminal
2	yL	y-Lower terminal
3	xL	x-Left terminal
4	yU	y-Upper terminal

Touch panel side connector : 1.0mmpitch  
Recommended matching connector : Series 9616 (IRISO)  
: Series 9610 (IRISO)  
: Series FMS (JST)

## 8. Input timing characteristics

### 8-1. Timing characteristics

Item		Symbol	Min	Typ	Max	Unit	Note
Clock	Frequency	1/Tc	—	25.18	28.33	MHz	
	Duty ratio	Tch/Tc	40	50	60	%	
Data	Set up time	Tds	5	—	—	ns	
	Hold time	Tdh	10	—	—	ns	
Horizontal sync. signal	Cycle	TH	30.0	31.8	—	$\mu$ s	
			770	800	900	clock	
	Pulse width	THp	2	96	200	clock	
Vertical sync. signal	Cycle	TV	515	525	560	line	
	Pulse width	TVp	2	—	34	line	
Horizontal display period		THd	640			clock	
H <sub>SYNC</sub> – Clock phase difference		THc	10	—	Tc-10	ns	
H <sub>SYNC</sub> - V <sub>SYNC</sub> signal phase difference		TVh	Tc	—	TH-THp	ns	
Vertical sync. signal start position		TVs	34			line	
Vertical display period		TVd	240			line	

\*In case of lower frequency, the deterioration of the display quality, flicker etc., may occur.

### 8-2. Horizontal display position

The horizontal display position is determined by ENAB signal.

Item		Symbol	Min	Typ	Max	Unit	Note
Enable signal	Set up time	Tes	5	—	Tc-10	ns	
	Pulse width	Tep	2	640	TH-10	clock	
H <sub>SYNC</sub> – Enable signal phase difference		The	44	—	TH-664	clock	


\* When ENAB is fixed at "Low", the display starts from the data of C104(clock) as shown in 8-5.

### 8-3. Vertical display position


The vertical display position (TVs) is fixed at 34th line.

Note) ENAB signal is independent of vertical display position.

### 8-4. Input Data Signals and Display position on the screen

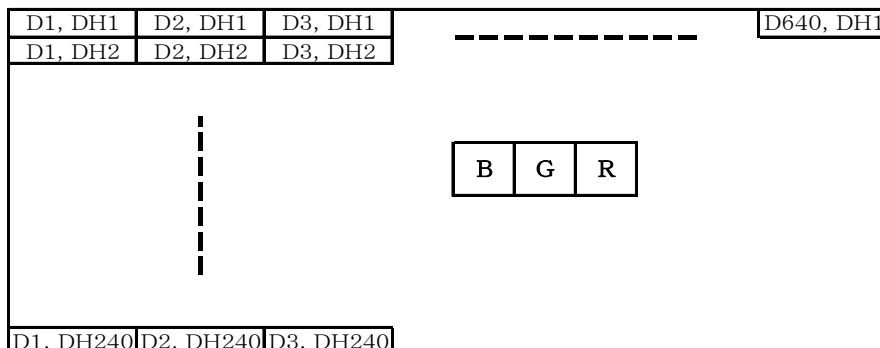

### 8-5. Input timing characteristics

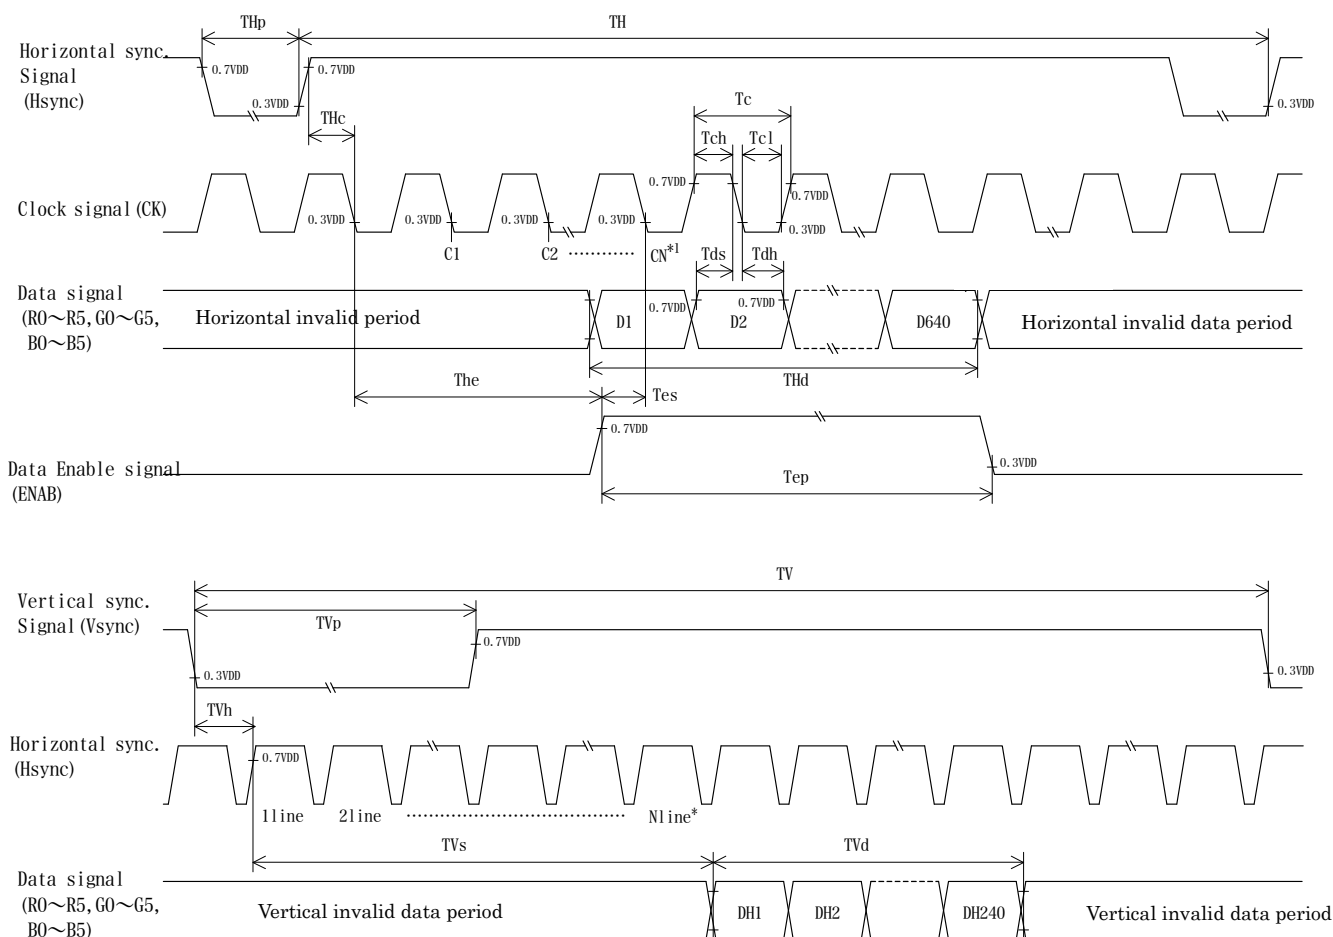

\*1 When ENAB is fixed at "Low", the display starts from the data of C104 (clock).

\*2 The vertical display position(TVs) is fixed at 34 (line).

## 9. Backlight characteristics

Temp.=25°C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply voltage	V <sub>INB</sub>	3.0	—	5.5	V	Ta=-20~70°C
ON-OFF (H)	BLEN	0.8 V <sub>INB</sub>	-	V <sub>INB</sub>	V	-
ON-OFF (L)		0	-	0.2V <sub>INB</sub>	V	-
LED forward current *1, *2	IF	14	15	16	mA	VBRT=0~1.4V
		2.8	3.0	3.2		VBRT=2.8V
Supply current	I <sub>INB</sub>	-	500	650	mA	V <sub>INB</sub> =3.3V,IF=15mA
		-	320	420	mA	V <sub>INB</sub> =5.0V,IF=15mA
Operating life time *3, *4	T	-	40,000	-	h	IF=15mA, Ta=25°C

\*1 For each “LED”

\*2 An input current below 5.0mA may reduce the brightness uniformity of the LED backlight.  
This is because the amount of light from each LED chip is different. Therefore, please evaluate carefully before finalizing the input current.

\*3 When brightness decrease 50% of initial brightness.


\*4 Life time is estimated data. (Condition : IF=15mA, Ta=25°C in chamber)

\* When you start-up, please charge in sequence of V<sub>INB</sub>->BLEN, or VBRT.


When you shut-down, please stop in sequence of BLEN and/or VBRT->V<sub>INB</sub>.

\* Please do not connect the other than our backlight to this output connector on the PCB.

\* In case VDD and V<sub>INB</sub> are supplied by a single power source, VDD & V<sub>INB</sub>, and GND are connected directly and separately from the output on the power source. If the common wire are used for VDD & V<sub>INB</sub>, and for GND, and are split near the PCB, and connect to each LCD driving circuit and backlight driving circuit, a flicker might be occurred due to a ripple between the both circuit.

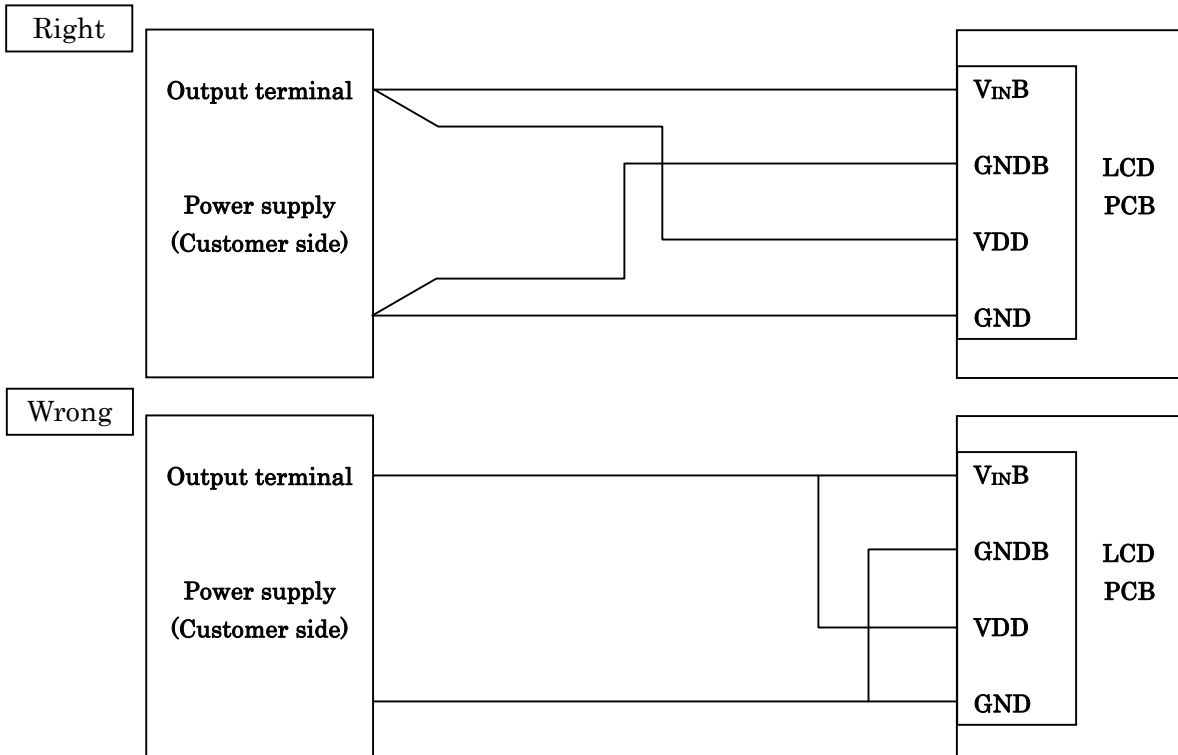

\* VBRT-IF characteristics

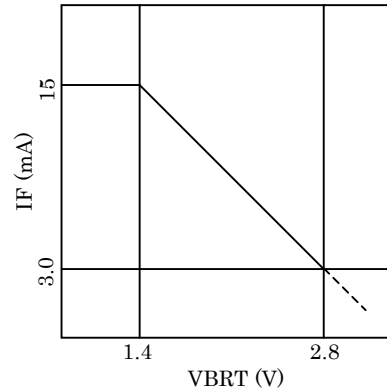

## 10. Design guidance for analog touch panel (T/P)

### 10-1 Electrical (In customer's design, please remember the following considerations.)

- 1 Do not use the current regulated circuit.
- 2 Keep the current limit with top and bottom layer. (Please refer to “Electrical absolute maximum ratings” for details.)
- 3 Analog T/P can not sense two points touching separately.
- 4 A contact resistance is appeared at the touch point between top and bottom layer.  
After this resistance has stable read of the T/P position data.
- 5 Because noise of inverter or peripheral circuits may interfere signal of touch panel itself it is necessary to design carefully in advance to avoid these noise problem.

### 10-2 Software

- 1 Do the "User Calibration".
- 2 "User Caribration" may be needed with long term using.  
Include "User Caribration" menu in your software.
- 3 When drawing a line with a stylus, there may be a slight discontinuity when the stylus passes over a spacer-dot. If necessary, please provide a compensation feature within your software.

### 10-3 Mounting on display and housing bezel

- 1 Do not use an adhesive tape to bond it on the front of T/P and hang it to the housing bezel.
- 2 This touch panel has an airtight but not watertight structure. Please not to use it for the applications requiring watertight or under the environments occurred condensation.  
If it is expected to be exposed to the environments that vapor, moisture or other liquids may seep inside a bezel, please be sure to take some measurements for drip-proof or waterproof by using sealing materials on the bezel.

## 11. Lot number identification

The lot number shall be indicated on the back of the backlight case of each LCD.

TCG062HVLBC-G20 - □□ - □□ - □ MADE IN □□□□□

↓ ↓   ↓   ↓   ↓   ↓  
1 2   3   4   5

No1. - No5. above indicate

1. Year code
2. Month code
3. Date
4. Version Number
5. Country of origin (Japan or China)

Year	2008	2009	2010	2011	2012	2013
Code	8	9	0	1	2	3

Month	Jan.	Feb.	Mar.	Apr.	May	Jun.
Code	1	2	3	4	5	6

Month	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Code	7	8	9	X	Y	Z

## 12. Warranty

### 12-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

### 12-2. Production warranty

Kyocera warrants its LCD's for a period of 12 months from the ship date. Kyocera shall, by mutual agreement, replace or re-work defective LCD's that are shown to be Kyocera's responsibility.

## 13. Precautions for use

### 13-1. Installation of the LCD

- 1) The LCD shall be installed so that there is no pressure on the LSI chips.
- 2) The LCD shall be installed flat, without twisting or bending.
- 3) Please design the housing window so that its edges are between the active area and the effective area of the LCD screen.  
Must maintain a gap between inside of bezel and touch panel to avoid malfunction or electrode damage of touch panel.
- 4) A transparent protection sheet is attached to the touch panel. Please remove the protection film slowly before use, paying attention to static electricity.

### 13-2. Static electricity

- 1) Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required.
- 2) Workers should use body grounding. Operator should wear ground straps.

### 13-3. LCD operation

- 1) The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.

### 13-4. Storage

- 1) The LCD shall be stored within the temperature and humidity limits specified.  
Store in a dark area, and protect the LCD from direct sunlight or fluorescent light.
- 2) Always store the LCD so that it is free from external pressure onto it.

### 13-5. Usage

- 1) **DO NOT** store in a high humidity environment for extended periods. Polarizer degradation bubbles, and/or peeling off of the polarizer may result.
- 2) Do not push or rub the touch panel's surface with hard to sharp objects such as knives, or the touch panel may be scratched.
- 3) When the touch panel is dirty, gently wipe the surface with a soft cloth, sometimes moistened by mild detergent or alcohol. If a hazardous chemical is dropped on the touch panel by mistake, wipe it off right away to prevent human contact.
- 4) Touch panel edges are sharp. Handle the touch panel with enough care to prevent cuts
- 5) Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizer.
- 6) Do not disassemble LCD module because it will result in damage.
- 7) This Kyocera LCD module has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.
- 8) Please do not use solid-base image pattern for long hours because a temporary afterimage may appear. We recommend using screen saver etc. in cases where a solid-base image pattern must be used.
- 9) Liquid crystal may leak when the module is broken. Be careful not to let the fluid go into your eyes and mouth. In the case the fluid touches your body; rinse it off right away with water and soap.



## 14. Reliability test data

Test item	Test condition	Test time	Judgement
High temp. atmosphere	80°C	240h	Display function : No defect Display quality : No defect Current consumption : No defect
Low temp. atmosphere	-30°C	240h	Display function : No defect Display quality : No defect Current consumption : No defect
High temp. humidity atmosphere	40°C 90% RH	240h	Display function : No defect Display quality : No defect Current consumption : No defect
Temp. cycle	-30°C 0.5h R.T. 0.5h 80°C 0.5h	10cycles	Display function : No defect Display quality : No defect Current consumption : No defect
High temp. operation	70°C	500h	Display function : No defect Display quality : No defect Current consumption : No defect
Point Activation life	Polyacetal stylus R4, Hardness 60° Hitting force 2.9N Hitting speed 5 time/s	one million times	Terminal resistance : No defect Insulation resistance : No defect Linearity : No defect Actuation Force : No defect

\* Each test item uses a test LCD only once. The tested LCD is not used in any other tests.




\* The LCD is tested in circumstances in which there is no condensation.





\* The reliability test is not an out-going inspection.

\* The result of the reliability test is for your reference purpose only.

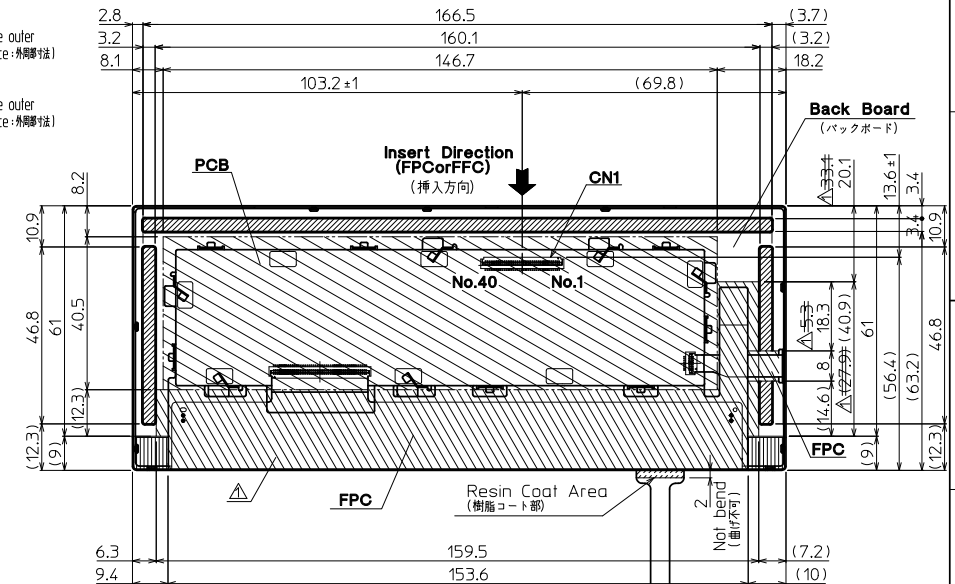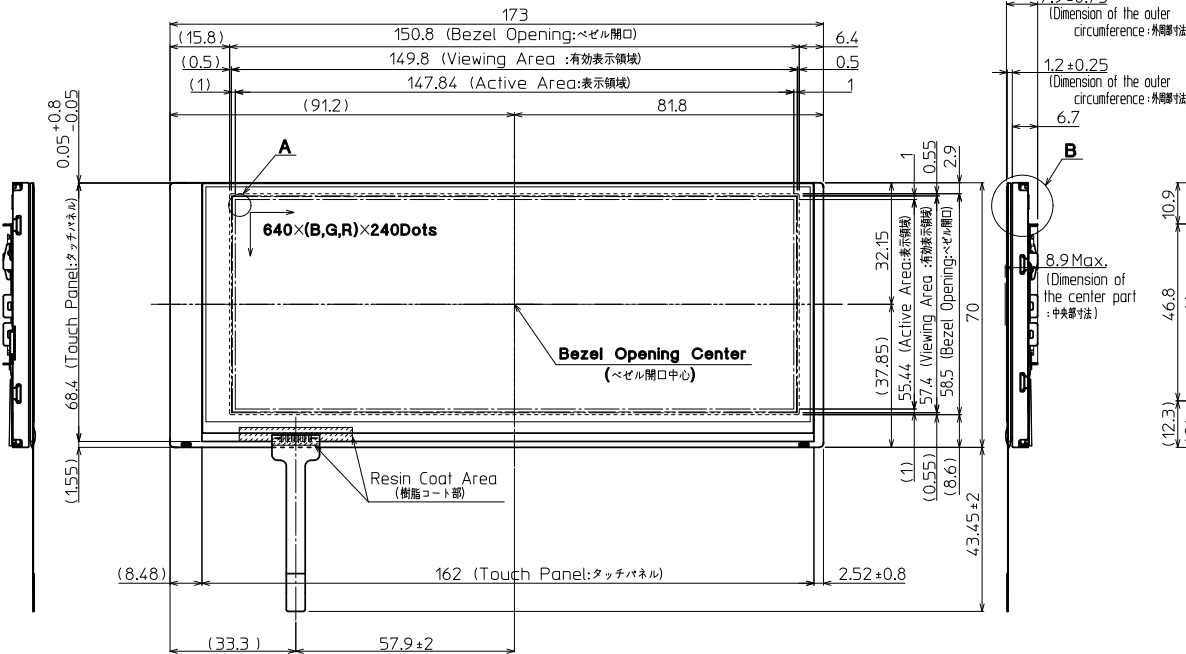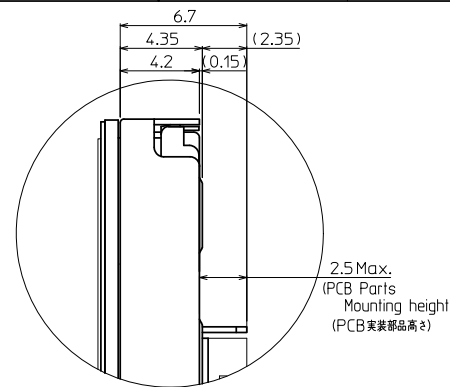The reliability test is conducted only to examine the LCD's capability.



No	Description	Drawn	Checked	Checked	Approved
△	・Change Dimension (3point) (円柱変更 (3箇所)) ・Change Shape of rear sheet (裏面PPC枠とシート形状変更)	'08.04.23 茶園	'08.04.26 鶴崎		'08.05.07 朝倉
△	・2/2 Rev.UP	'08.07.16 茶園	'08.07.16 朝倉		'08.07.16 朝倉



-  : Projected part is 0.15mm height from Back Board.  
 (裏面板金からの高≧0.15mm)  
 : Projected part is 0.10mm height from Back Board.  
 (裏面板金からの高≧0.10mm)  
 : Projected part is 2.5mm height from Back Board.  
 (裏面板金からの高≧2.5mm)  
 : Projected part is 1.5mm height from Back Board.  
 (裏面板金からの高≧1.5mm)


Note. (注記)

- Connector CN1: IMSA-9681S-40A-GF (IRISO)  
(コネクタ)
- The Information of LCD is displayed starting at the upper left hand corner, moving right then down to the lower right hand corner.  
(LCDにおいて、画像データの表示は左上コーナーから始まり、右へ進み下へ送られ右下コーナーへ向かう。)
- Tolerance without indication :  $\pm 0.5$   
(指示無き公差)

<b>Material</b>	<b>Treatment</b>	<b>Approved</b>	<b>Checked</b>	<b>Checked</b>	<b>Drawn</b>	<b>Scale</b>	<b>Title</b>		<b>Year-Month-Day</b>	<b>Size</b>
材 質	処 理	'08.03.28		'08.03.28		1:1 (5:1,NTS)	TCG062HVLBC		'08.03.26	2
<b>Quantity</b>	<b>Description;</b>									
製作数	備考 RoHS	朝倉		倉元	茶圓		<b>Outline Dimensions</b>	<b>Drawing No.</b>	121A5068800-2	1/2


Note (注記)

	Name (名称)	Explanation (説明)
1	T.P.	Touch panel (タッチパネル)
2	T.P. Active Area (T.P. アクティブエリア)	Operating area of touch panel (タッチパネルの動作範囲)
3	T.P. Viewing Area (T.P. ビューイングエリア)	Warranty area of touch panel's appearance (タッチパネルの外観(傷・異物等)保証範囲)  By giving pressure between the active area and the viewing area of the touch panel, there is a possibility that the touch panel will operate. (タッチパネルアクティブエリアとタッチパネルビューイングエリア間は荷重をかけた場合は、タッチパネルが動作する可能性があります。)

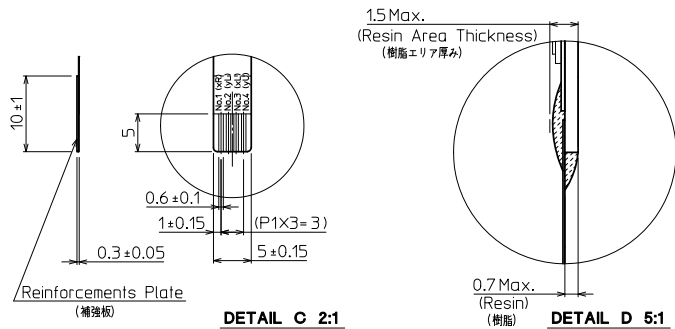

Precaution in use of touch panel.  
(タッチパネル使用上の注意事項)

1. Fix touch panel at LCD module and the rear side of touch panel.  
(タッチパネルの固定はLCDモジュール側とタッチパネル裏面とで行なうこと)
2. Must maintain a gap between inside of bezel and touch panel to avoid malfunction or electrode damage of touch panel.  
(ベゼル内側とタッチパネルの接触厳禁。誤動作や電極破損の原因となります)


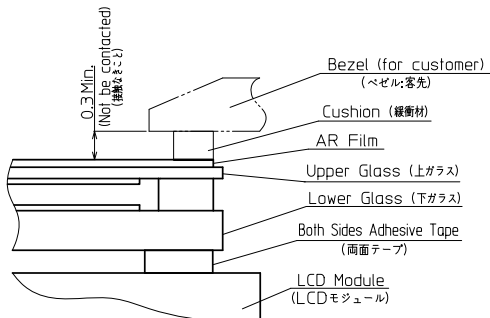


(NTS)


Touch Panel Pin-assign

(タッチパネル ピンアサイン)  
※タッチ面側からのピンアサイン

No.4 (yU)  
No.3 (xL)  
No.2 (yL)  
No.1 (xR)

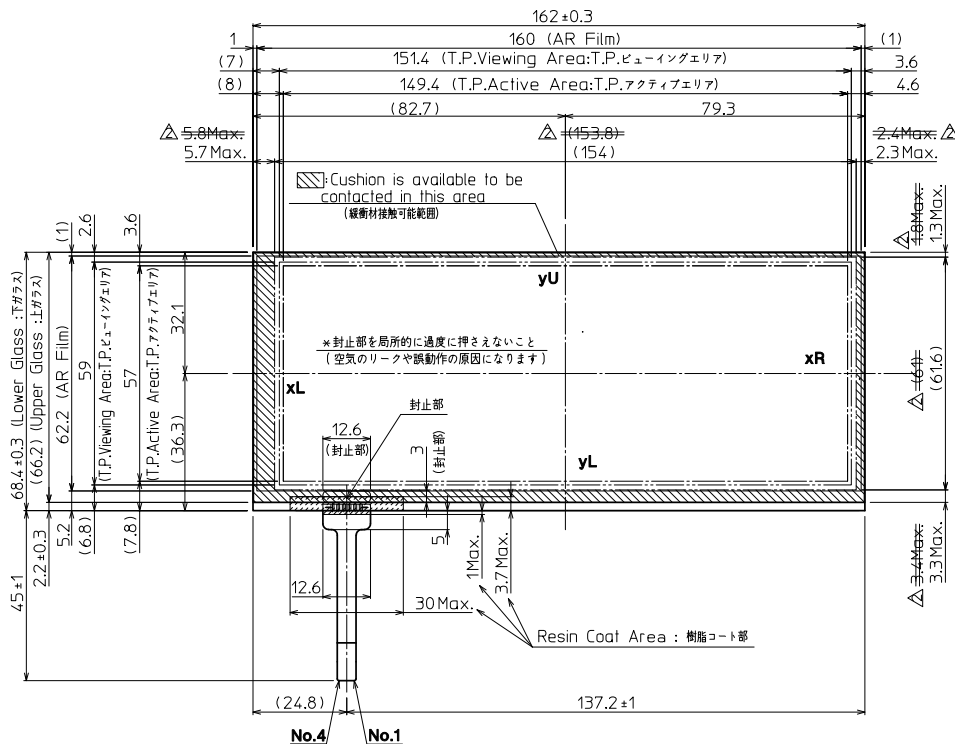



1.1±0.2  
(厚み寸法はT.P. 外周部に適用する)  
0.7 (Lower Glass :下ガラス)  
0.21 (Upper Glass :上ガラス)  
0.18 (AR Film)

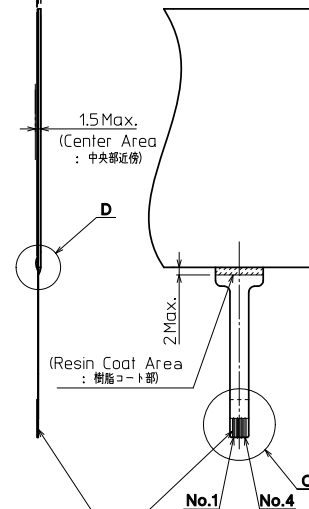

Note. (注記)  
1 Tolerance without indication: ±0.5  
(指示無き公差)

Material 材質	Treatment 処理	Approved '08.03.28	Checked	Checked '08.03.28	Drawn 茶園	Scale 1:1 (5:1, 2:1, NTS)	Title TCG062HVLBC	KYOCERA	Year-Month-Day '08.03.26	Size 2
Quantity 製作数	Description 備考	朝倉		倉元			T.P. Outline Dimensions	Drawing No. 121A5068800-2		2/2




# ※取り付け例(Installation guidance)

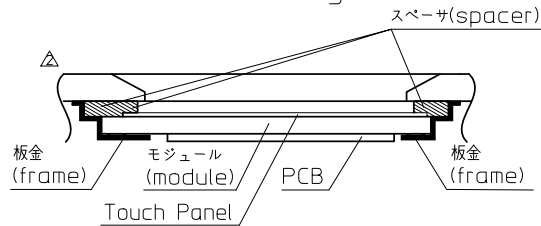

DETAIL A (Dot Size)  
(NTS)

## 参考(for Reference)

No	Description	Drawn	Checked	Checked	Approved
△	-Change Shape of rear sheet (裏面PCに押さえシート形状変更)	'08.04.23 茶園	'08.04.26 鶴崎		'08.05.07 朝倉
△	-Delete Dimensions (寸法削除) -Change Pressure may be applied in this area (押さえ付け可能領域 変更)	'08.07.18 茶園	'08.07.18 朝倉		'08.07.18 朝倉

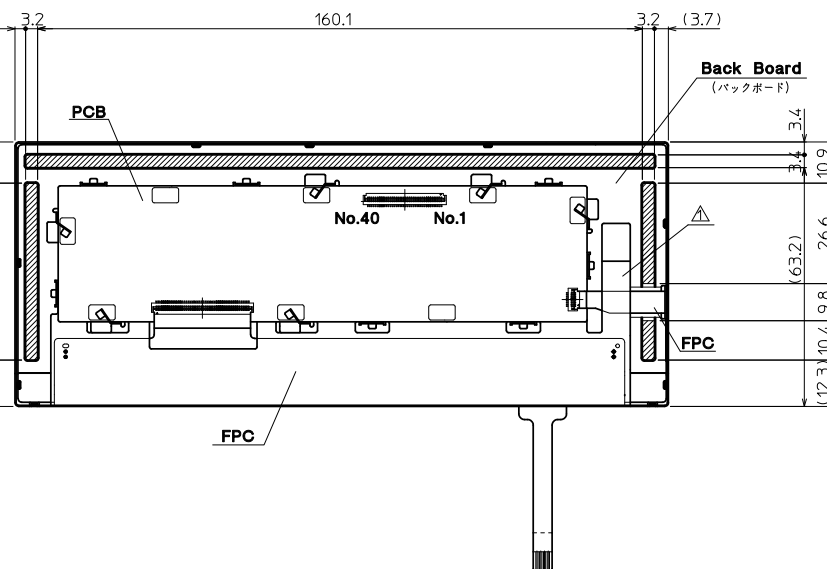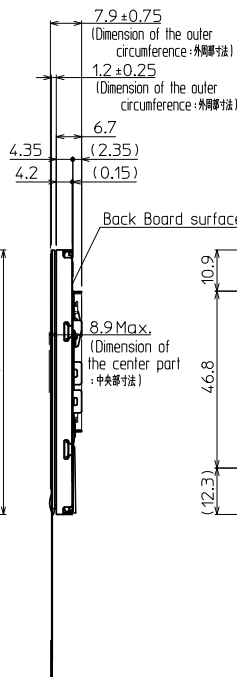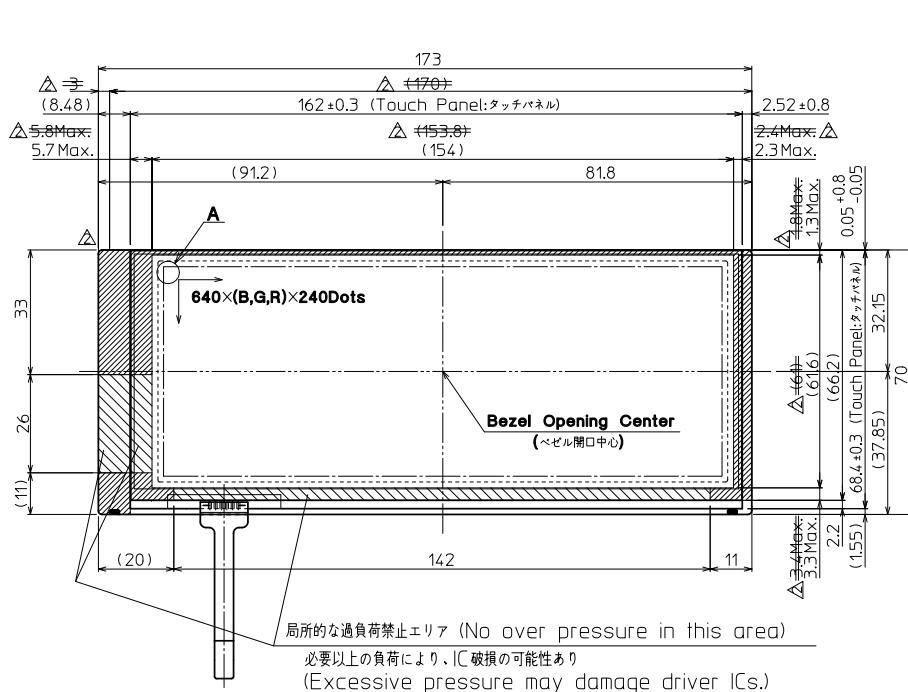

### 取り付け方法 (Installation of the LCD)

ケースにモジュールをはめ込み(X,Y固定)、裏面からZ方向を固定する事が可能。  
(The LCD module shall be held in the X/Y direction by the housing, and in the Z direction using a backboard.)

斜線部の領域にて、下記の条件を満たし押さえることが望ましい。  
(To hold the LCD module in place, it shall be supported with pressure applied to the hatched areas indicated by the descriptions below.)

押さえつけ可能領域  
(Pressure may be applied in this area.)

押さえつけ可能領域、但し、局所的な過負荷禁止。  
(No "point" over pressure is allowed.)

### 表面取り付け条件 (Installation conditions (Front side))

- 1.下辺長辺側、左短辺中央部に局所的な負荷がかからないように取り付けのこと  
(1. The LCD shall be installed so that there is no point pressure applied in the middle of the left and lower border around the viewing area.)
- 2.広い範囲で均一に押さえることが望ましい  
(2. The LCD shall be uniformly supported over as wide an area as possible.)

注記 (Note)  
指定公差 (Tolerance without indication) : ±0.5

### 裏面取り付け条件 (Installation conditions (Back side))

- 1.PCBへの接触無きこと  
(1. Do not allow any foreign material to contact the PCB.)
- 2.FPCエリア押さえ不可  
(2. Do not use any part of the FPC area to hold the LCD module in place)
- 3.PCB周りの板金突起部押さえ不可  
(3. Do not apply pressure on the projected metal part of the PCB. )
- 4.モジュールがたわむこと無きよう押さえつけのこと  
(4. Do not allow the LCD module to bend or twist.)
- 5.広い範囲で均一に押さえることが望ましい  
(5. Support the LCD with uniform pressure over as wide an area as possible.)

Material	Treatment	Approved	Checked	Checked	Drawn	Scale	Title				Size
材質	処理	'08.04.07	'08.04.07	'08.04.04	茶園	1:1(NTS)	TCG062HVLBC				2
Quantity	Description:	南	朝倉	倉元			モジュール取り付け方法				
製作数	備考										

KYOCERA  
Drawing No.

Year-Month-Day  
'08.03.27

121A5069000-2

Spec No.	TQ3C-8EAF0-E2DDM16-01
Date	August 7, 2008

## **KYOCERA INSPECTION STANDARD**

**TYPE : TCG062HVLBC-G20**





KYOCERA CORPORATION  
KAGOSHIMA HAYATO PLANT  
LCD DIVISION

Original Issue Date	Designed by : Engineering dept.			Confirmed by : QA dept.	
	Prepared	Checked	Approved	Checked	Approved
April 3, 2008	<i>Td. Ichimaru</i>	<i>W. Yano</i>	<i>Y. Matsumoto</i>	<i>S. Higashino</i>	<i>T. Ishii</i>



## Visuals specification

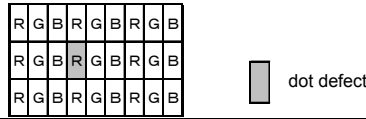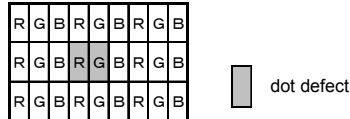




### 1) Note

	Note		
General	<p>1. Customer identified anomalies not defined within this inspection standard shall be reviewed by Kyocera, and an additional standard shall be determined by mutual consent.</p> <p>2. This inspection standard about the image quality shall be applied to any defect within the active area and shall not be applicable to outside of the area.</p> <p>3. Inspection conditions</p> <p>Luminance : 500 Lux min.</p> <p>Inspection distance : 300 mm.</p> <p>Temperature : 25 ± 5°C</p> <p>Direction : Directly above</p>		
Definition of inspection item	Dot defect	Bright dot defect	<p>The dot is constantly “on” when power applied to the LCD, even when all “Black” data sent to the screen.</p> <p>Inspection tool: 5% Transparency neutral density filter.</p> <p>Count dot: If the dot is visible through the filter.</p> <p>Don't count dot: If the dot is not visible through the filter.</p> 
		Black dot defect	<p>The dot is constantly “off” when power applied to the LCD, even when all “White” data sent to the screen.</p>
		Adjacent dot	<p>Adjacent dot defect is defined as two or more bright dot defects or black dot defects.</p> 
	External inspection	Bubble, Scratch, Foreign particle (Polarizer, Cell, Backlight)	Visible operating (all pixels “Black” or “White”) and non operating.
		Appearance inspection	Does not satisfy the value at the spec.
	Others	LED wire	Damaged to the LED wire, connector, pin, functional failure or appearance failure.
	Definition of size	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Definition of circle size</p>  <p><math>d = (a + b) / 2</math></p> </div> <div style="text-align: center;"> <p>Definition of linear size</p>  </div> </div>	

## 2) Standard

Classification		Inspection item		Judgement standard																		
Defect (in LCD glass)	Dot defect	Bright dot defect		Acceptable number : 4																		
				Bright dot spacing : 5 mm or more																		
		Black dot defect		Acceptable number : 5																		
				Bright dot spacing : 5 mm or more																		
		2 dot join	Bright dot defect	Acceptable number : 2																		
			Black dot defect	Acceptable number : 3																		
	3 or more dots join		Acceptable number : 0																			
	Total dot defects		Acceptable number : 5 Max																			
	Others	White dot, Dark dot (Circle)	<table><tr><th>Size (mm)</th><th>Acceptable number</th></tr><tr><td><math>d \leq 0.2</math></td><td>(Neglected)</td></tr><tr><td><math>0.2 &lt; d \leq 0.4</math></td><td>5</td></tr><tr><td><math>0.4 &lt; d \leq 0.5</math></td><td>3</td></tr><tr><td><math>0.5 &lt; d</math></td><td>0</td></tr></table>			Size (mm)	Acceptable number	$d \leq 0.2$	(Neglected)	$0.2 < d \leq 0.4$	5	$0.4 < d \leq 0.5$	3	$0.5 < d$	0							
Size (mm)	Acceptable number																					
$d \leq 0.2$	(Neglected)																					
$0.2 < d \leq 0.4$	5																					
$0.4 < d \leq 0.5$	3																					
$0.5 < d$	0																					
External inspection (Defect on Polarizer or between Polarizer and LCD glass)		Polarizer (Scratch)		<table><tr><th>Width (mm)</th><th>Length (mm)</th><th>Acceptable number</th></tr><tr><td><math>W \leq 0.1</math></td><td>—</td><td>(Neglected)</td></tr><tr><td rowspan="2"><math>0.1 &lt; W \leq 0.3</math></td><td><math>L \leq 5.0</math></td><td>(Neglected)</td></tr><tr><td><math>5.0 &lt; L</math></td><td>0</td></tr><tr><td><math>0.3 &lt; W</math></td><td>—</td><td>0</td></tr></table>			Width (mm)	Length (mm)	Acceptable number	$W \leq 0.1$	—	(Neglected)	$0.1 < W \leq 0.3$	$L \leq 5.0$	(Neglected)	$5.0 < L$	0	$0.3 < W$	—	0		
		Width (mm)	Length (mm)	Acceptable number																		
		$W \leq 0.1$	—	(Neglected)																		
		$0.1 < W \leq 0.3$	$L \leq 5.0$	(Neglected)																		
			$5.0 < L$	0																		
		$0.3 < W$	—	0																		
		Polarizer (Bubble)		<table><tr><th>Size (mm)</th><th>Acceptable number</th></tr><tr><td><math>d \leq 0.2</math></td><td>(Neglected)</td></tr><tr><td><math>0.2 &lt; d \leq 0.3</math></td><td>5</td></tr><tr><td><math>0.3 &lt; d \leq 0.5</math></td><td>3</td></tr><tr><td><math>0.5 &lt; d</math></td><td>0</td></tr></table>			Size (mm)	Acceptable number	$d \leq 0.2$	(Neglected)	$0.2 < d \leq 0.3$	5	$0.3 < d \leq 0.5$	3	$0.5 < d$	0						
		Size (mm)	Acceptable number																			
		$d \leq 0.2$	(Neglected)																			
		$0.2 < d \leq 0.3$	5																			
		$0.3 < d \leq 0.5$	3																			
		$0.5 < d$	0																			
		Foreign particle (Circular shape)		<table><tr><th>Size (mm)</th><th>Acceptable number</th></tr><tr><td><math>d \leq 0.2</math></td><td>(Neglected)</td></tr><tr><td><math>0.2 &lt; d \leq 0.4</math></td><td>5</td></tr><tr><td><math>0.4 &lt; d \leq 0.5</math></td><td>3</td></tr><tr><td><math>0.5 &lt; d</math></td><td>0</td></tr></table>			Size (mm)	Acceptable number	$d \leq 0.2$	(Neglected)	$0.2 < d \leq 0.4$	5	$0.4 < d \leq 0.5$	3	$0.5 < d$	0						
		Size (mm)	Acceptable number																			
		$d \leq 0.2$	(Neglected)																			
		$0.2 < d \leq 0.4$	5																			
		$0.4 < d \leq 0.5$	3																			
		$0.5 < d$	0																			
		Foreign particle (Linear shape) Scratch		<table><tr><th>Width (mm)</th><th>Length (mm)</th><th>Acceptable number</th></tr><tr><td><math>W \leq 0.03</math></td><td>—</td><td>(Neglected)</td></tr><tr><td rowspan="3"><math>0.03 &lt; W \leq 0.1</math></td><td><math>L \leq 2.0</math></td><td>(Neglected)</td></tr><tr><td><math>2.0 &lt; L \leq 4.0</math></td><td>3</td></tr><tr><td><math>4.0 &lt; L</math></td><td>0</td></tr><tr><td><math>0.1 &lt; W</math></td><td>—</td><td>(According to circular shape)</td></tr></table>			Width (mm)	Length (mm)	Acceptable number	$W \leq 0.03$	—	(Neglected)	$0.03 < W \leq 0.1$	$L \leq 2.0$	(Neglected)	$2.0 < L \leq 4.0$	3	$4.0 < L$	0	$0.1 < W$	—	(According to circular shape)
		Width (mm)	Length (mm)	Acceptable number																		
		$W \leq 0.03$	—	(Neglected)																		
$0.03 < W \leq 0.1$	$L \leq 2.0$	(Neglected)																				
	$2.0 < L \leq 4.0$	3																				
	$4.0 < L$	0																				
$0.1 < W$	—	(According to circular shape)																				

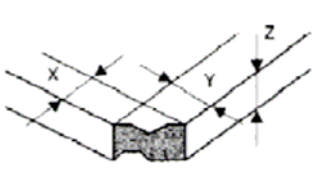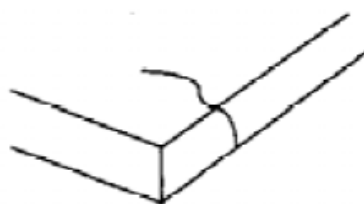

Inspection item	Judgement standard					
Scratch, Foreign particle (Touch screen portion)	( W = Width, L = Length, D = Diameter = (major axis + minor axis)/ 2)					
	Item	Width(mm)	Length(mm)	Acceptable number		
	Scratch	$W \leq 0.03$	$L \leq 20$	Neglected		
		$0.03 < W \leq 0.05$	$L \leq 10$	2pcs within $\varnothing 20\text{mm}$		
		$0.05 < W \leq 0.08$	$L \leq 6$	2pcs within $\varnothing 20\text{mm}$		
		$0.08 < W \leq 0.1$	$L \leq 4$	1pcs within $\varnothing 30\text{mm}$		
	Foreign (line like)	$W \leq 0.05$	Neglected	Neglected		
		$0.05 < W \leq 0.1$	$L \leq 5$	2pcs within $\varnothing 30\text{mm}$		
	Foreign (circle like)	$D \leq 0.2$		Neglected		
		$0.2 < D \leq 0.3$		2pcs within $\varnothing 30\text{mm}$		
Above are applied to the visible area.						
Unless there are foreign particle and damage affected seriously to the electrical performance out of the active area, we approve of this product.						
Glass crack (Touch screen portion)	Item	Size (mm)			Acceptable number	
	Conner crack		X	$\leq 3$	2 pcs /panel	
			Y	$\leq 3$		
			Z	$< t$		
	Crack in other area than in corner		X	$\leq 5$	2 pcs /side	
			Y	$\leq 1.5$		
			Z	$< t$		
	Progressive crack				0 pcs (NG even 1pcs)	
	Above are applied to the visible area.					
	Unless there are foreign particle and damage affected seriously to the electrical performance out of the active area, we approve of this product.					
Newton's ring	All Newton Rings in the center of the screen must be rejected. Border around the screen are permitted.					
		NG				
				OK		