

SPEC

| | |
|----------|-----------------------|
| Spec No. | TQ3C-8EAF0-E1DEY22-00 |
| Date | April 15, 2010 |

TYPE : TCG062HVLBD-H20

< 6.2 inch HVGA transmissive color TFT with LED backlight,
Constant current circuit for LED backlight and Touch panel>

CONTENTS

1. Application
2. Construction and outline
3. Mechanical specifications
4. Absolute maximum ratings
5. Electrical characteristics
6. Optical characteristics
7. Interface signals
8. Input timing characteristics
9. Backlight characteristics
10. Design guidance for analog touch panel (T/P)
11. Lot number identification
12. Warranty
13. Precautions for use
14. Reliability test data
15. Outline drawing



KYOCERA CORPORATION
KAGOSHIMA HAYATO PLANT
LCD DIVISION

This specification is subject to change without notice.
Consult Kyocera before ordering.

| Original Issue Date | Designed by: Engineering dept. | | | Confirmed by: QA dept. | |
|------------------------|--------------------------------|---------------------|---------------------|------------------------|---------------|
| | Prepared | Checked | Approved | Checked | Approved |
| April 15, 2010 | <i>Y. Ikeda</i> | <i>Y. Yamaguchi</i> | <i>Y. Matsumoto</i> | <i>J. Sakaguchi</i> | <i>Z. Ito</i> |

Warning

1. This Kyocera LCD module has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the module in such applications.
2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs, and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera modules in applications.

Caution

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.

| | | |
|-----------------------------------|-----------------------------|-----------|
| Spec No. TQ3C-8EAF0-E1DEY22-00 | Part No. TCG062HVLBD-H20 | Page - |
|-----------------------------------|-----------------------------|-----------|

Revision record

| Date | | Designed by : Engineering dept. | | | Confirmed by : QA dept. | |
|---------|------|---------------------------------|--------------|----------|-------------------------|----------|
| | | Prepared | Checked | Approved | Checked | Approved |
| | | | | | | |
| Rev.No. | Date | Page | Descriptions | | | |
| | | | | | | |

1. Application

This document defines the specification of TCG062HVLBD-H20. (RoHS Compliant)

2. Construction and outline

| | |
|--------------------|---|
| LCD | : Transmissive color dot matrix type TFT |
| Backlight system | : LED |
| Polarizer | : Glare treatment |
| Additional circuit | : Timing controller, Power supply (3.3V input) (with Constant current circuit for LED backlight) |
| Touch panel | : Analog type(Glass/Glass), Glare Anti-reflection treatment |

3. Mechanical specifications

3-1. Mechanical specifications of LCD

| Item | Specification | Unit |
|------------------------|--|------|
| Outline dimensions 1) | 173 (W)× 70 (H) × 7.92 (D) | mm |
| Active area | 147.84 (W) × 55.44 (H) (15.8cm / 6.2 inch (Diagonal)) | mm |
| Effective viewing area | 149.8 (W) × 57.4 (H) | mm |
| Dot format | 640×(B,G,R) (W) × 240 (H) | dot |
| Dot pitch | 0.077 (W) × 0.231 (H) | mm |
| Base color 2) | Normally White | - |
| Mass | 145 | g |

- 1) Projection not included. Please refer to outline for details.
- 2) Due to the characteristics of the LCD material, the color varies with environmental temperature.

3-2. Mechanical specifications of touch panel

| Item | | Specification | Unit |
|------------------|---------------------------|-----------------------------|------------|
| Input | | Radius-0.8 stylus or Finger | - |
| Actuation Force | | 0.1~2.0 | N |
| Operating life | Striking(Finger-input) 1) | 1 million | hits |
| | Sliding(Stylus-input) 2) | 100 thousand | characters |
| Surface hardness | | 2H or more(Pencil hardness) | - |

| | | |
|-----------------------|-----------------|------|
| Spec No. | Part No. | Page |
| TQ3C-8EAF0-E1DEY22-00 | TCG062HVLBD-H20 | 2 |

1) Striking test condition

Testing rod : Silicon rubber (Hardness:60°),Tip : R = 4.0
 Testing location : In active area
 Input voltage : DC5V
 Load : 2.94N
 Cycle : 5hits/sec
 Judgment : No defect in function
 : No appearance defect which causes trouble to use.
 *Dents, blurs and marks on surface film : neglected

2) Sliding test condition

Testing rod : Polyacetal resin, Tip : R = 0.8
 Testing location : In active area
 Input voltage : DC5V
 Load : 2.45N
 Input length : 10mm
 Input speed : 50mm/sec
 Sliding times : 10mm sliding (back and forth) counts as 2 times.
 Judgment : No defect in function
 : No appearance defect which causes trouble to use.
 *Dents, blurs and marks on surface film : neglected

4. Absolute maximum ratings

4-1. Electrical absolute maximum ratings

| Item | Symbol | Min. | Max. | Unit |
|--------------------------------|------------------|------|------------------|------|
| Supply voltage for logic | V _{DD} | 0 | 4.0 | V |
| Input signal voltage 1) | V _{IN} | -0.3 | 6.0 | V |
| Supply voltage for backlight | V _{INB} | 0 | 6.0 | V |
| Backlight ON-OFF | BLEN | 0 | V _{INB} | V |
| Brightness adjust voltage | VBRT | 0 | V _{INB} | V |
| Supply voltage for touch panel | V _{TP} | 0 | 6.0 | V |
| Input current of touch panel | I _{TP} | 0 | 0.5 | mA |

1) Input signal : CK, R0~R5, G0~G5, B0~B5, H_{SYNC}, V_{SYNC}, ENAB, R/L, U/D

4-2. Environmental absolute maximum ratings

| Item | Symbol | Min. | Max. | Unit |
|--------------------------|------------------|------|------|------|
| Operating temperature 1) | T _{OP} | -20 | 70 | °C |
| Storage temperature 2) | T _{STO} | -30 | 80 | °C |
| Operating humidity 3) | H _{OP} | 10 | 4) | %RH |
| Storage humidity 3) | H _{STO} | 10 | 4) | %RH |
| Vibration | - | 5) | 5) | - |
| Shock | - | 6) | 6) | - |

1) Operating temperature means a temperature which operation shall be guaranteed. Since display performance is evaluated at 25°C, another temperature range should be confirmed.

2) Temp. = -30°C < 48h , Temp. = 80°C < 168h

Store LCD panels at normal temperature/humidity. Keep them free from vibration and shock. An LCD panel that is kept at a low or a high temperature for a long time can be defective due to other conditions, even if the low or high temperature satisfies the standard.

(Please refer to "Precautions for Use" for details.)

3) Non-condensing

4) Temp. ≤ 40°C, 85%RH Max.

Temp. > 40°C, Absolute humidity shall be less than 85%RH at 40°C.

5)

| | | |
|-----------------|-------------|---|
| Frequency | 10~55 Hz | Acceleration value (0.3~9 m/s ²) |
| Vibration width | 0.15mm | |
| Interval | 10-55-10 Hz | 1 minutes |

2 hours in each direction X, Y, Z (6 hours total)

EIAJ ED-2531

6) Acceleration: 490 m/s², Pulse width: 11 ms


3 times in each direction: ±X, ±Y, ±Z

EIAJ ED-2531


5-2. Touch panel

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|--------------------------------|-----------------|-----------|----------------|------|------|------|
| Supply voltage for touch panel | V _{TP} | - | - | 5.0 | - | V |
| Terminal resistance 1) | xL-xR | - | 700 | - | 2100 | Ω |
| | yU-yL | - | 100 | - | 500 | Ω |
| Linearity 2) | - | - | less than ±2.5 | | | % |
| Insulation resistance 3) | - | DC25V | 50 | - | - | MΩ |
| Chattering 4) | - | at ON/OFF | less than 10 | | | ms |

- 1) Resistance between terminal xL and xR, or between yU and yL
- 2) Apply 5VDC to the terminal xL-xR, and measure the output voltage at terminal y when a random input is applied in the active area. Measure the difference between the output and theoretical voltages. (Measure the actual voltage at the terminal using the same method.)

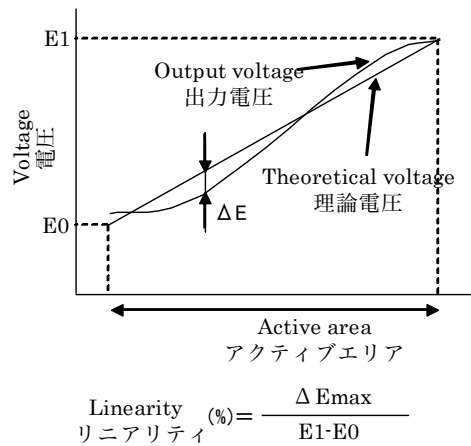

- 3) Resistance between the upper and lower terminals.
- 4) Apply 5VDC to the terminal xL-xR, and measure the oscillation at terminal y when applying a random input in the active area. (Measure the oscillation at terminal x using the same method.)

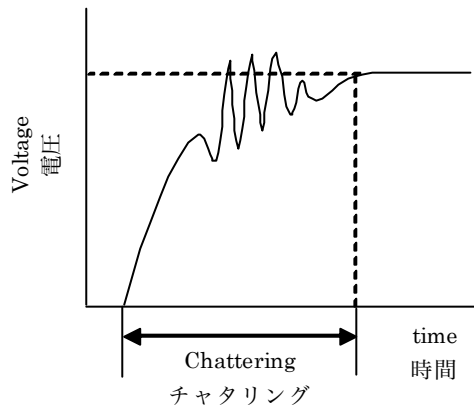

6. Optical characteristics


Measuring spot = ϕ 6.0mm, Temp. = 25°C

| Item | | Symbol | Condition | Min. | Typ. | Max. | Unit |
|--|-------|-------------------------|-----------------------------|------|------|------|-------------------|
| Response time | Rise | τ_{r} | $\theta = \phi = 0^{\circ}$ | - | 10 | - | ms |
| | Down | τ_{d} | $\theta = \phi = 0^{\circ}$ | - | 15 | - | ms |
| Viewing angle range View direction : 6 o'clock (Gray inversion) | | θ_{UPPER} | $\text{CR} \geq 5$ | - | 65 | - | deg. |
| | | θ_{LOWER} | | - | 80 | - | |
| | | ϕ_{LEFT} | | - | 80 | - | deg. |
| | | ϕ_{RIGHT} | | - | 80 | - | |
| Contrast ratio | | CR | $\theta = \phi = 0^{\circ}$ | 300 | 500 | - | - |
| Brightness | | L | IF=15mA/Line | 175 | 255 | - | cd/m ² |
| Chromaticity coordinates | Red | x | $\theta = \phi = 0^{\circ}$ | 0.55 | 0.60 | 0.65 | - |
| | | y | | 0.31 | 0.36 | 0.41 | |
| | Green | x | $\theta = \phi = 0^{\circ}$ | 0.31 | 0.36 | 0.41 | |
| | | y | | 0.52 | 0.57 | 0.62 | |
| | Blue | x | $\theta = \phi = 0^{\circ}$ | 0.10 | 0.15 | 0.20 | |
| | | y | | 0.08 | 0.13 | 0.18 | |
| | White | x | $\theta = \phi = 0^{\circ}$ | 0.28 | 0.33 | 0.38 | |
| | | y | | 0.30 | 0.35 | 0.40 | |



6-1. Definition of contrast ratio

$$CR(\text{Contrast ratio}) = \frac{\text{Brightness with all pixels "White"}}{\text{Brightness with all pixels "Black"}}$$


6-2. Definition of response time

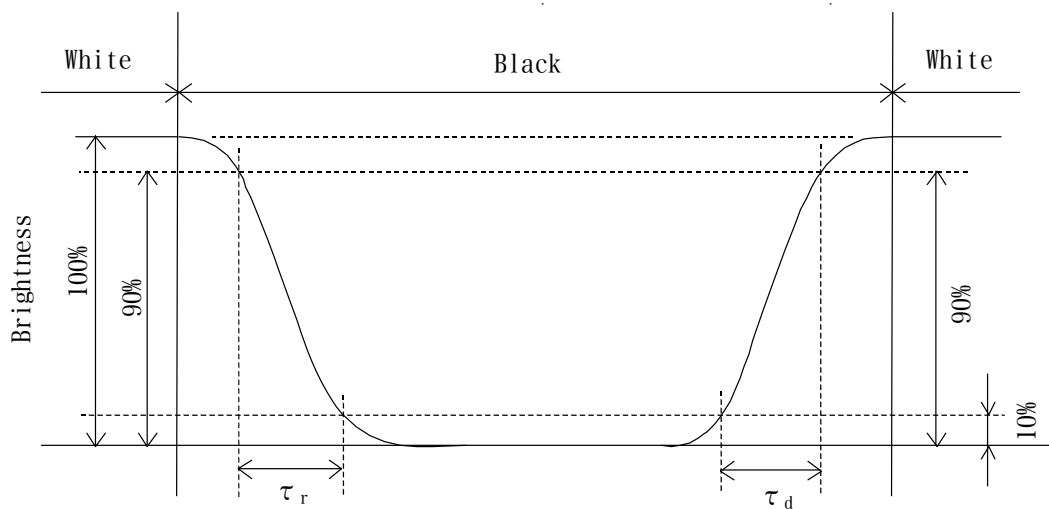

6-3. Definition of viewing angle

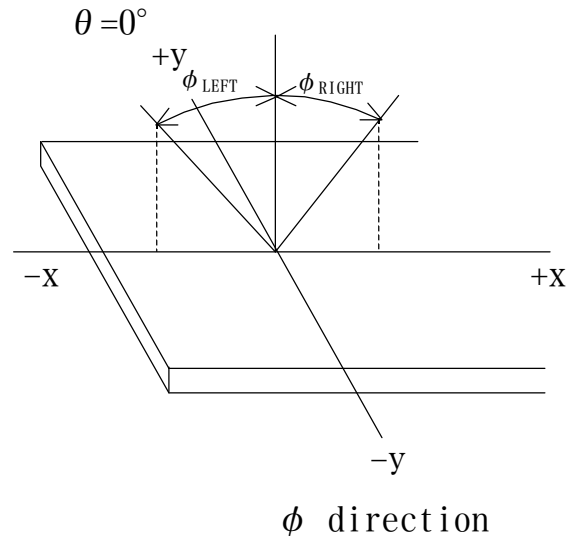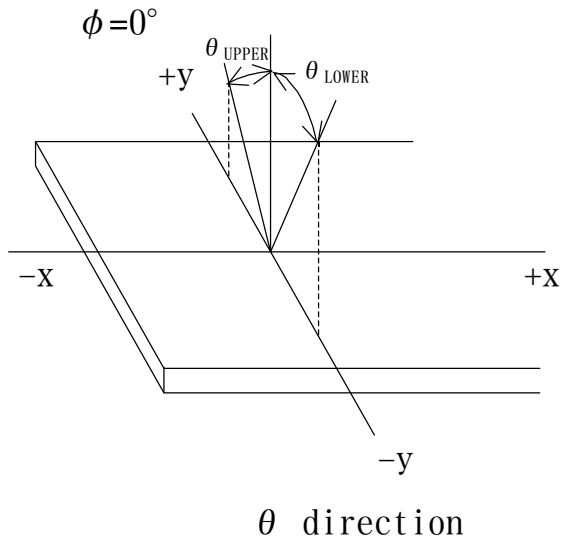

6-4. Brightness measuring points

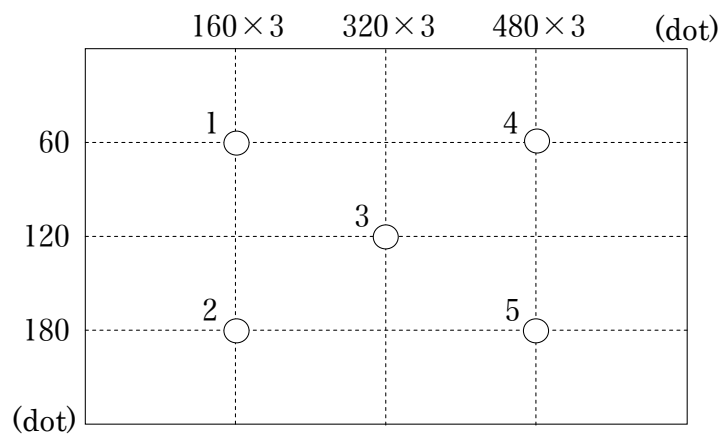

- 1) Rating is defined on the average in the viewing area.
- 2) Measured 30 minutes after the LED is powered on. (Ambient temp. = 25°C)

7. Interface signals

7-1. Pin assignment of LCD panel and LED

| No. | Symbol | Description | I/O | Note |
|-----|-------------------|---|-----|------|
| 1 | GND | GND | - | |
| 2 | CK | Clock signal for sampling each data signal | I | |
| 3 | H _{SYNC} | Horizontal synchronous signal (negative) | I | |
| 4 | V _{SYNC} | Vertical synchronous signal (negative) | I | |
| 5 | GND | GND | - | |
| 6 | R0 | RED data signal (LSB) | I | |
| 7 | R1 | RED data signal | I | |
| 8 | R2 | RED data signal | I | |
| 9 | R3 | RED data signal | I | |
| 10 | R4 | RED data signal | I | |
| 11 | R5 | RED data signal (MSB) | I | |
| 12 | GND | GND | - | |
| 13 | G0 | GREEN data signal (LSB) | I | |
| 14 | G1 | GREEN data signal | I | |
| 15 | G2 | GREEN data signal | I | |
| 16 | G3 | GREEN data signal | I | |
| 17 | G4 | GREEN data signal | I | |
| 18 | G5 | GREEN data signal (MSB) | I | |
| 19 | GND | GND | - | |
| 20 | B0 | BLUE data signal (LSB) | I | |
| 21 | B1 | BLUE data signal | I | |
| 22 | B2 | BLUE data signal | I | |
| 23 | B3 | BLUE data signal | I | |
| 24 | B4 | BLUE data signal | I | |
| 25 | B5 | BLUE data signal (MSB) | I | |
| 26 | GND | GND | - | |
| 27 | ENAB | Signal to settle the horizontal display position (positive) | I | 1) |
| 28 | V _{DD} | 3.3V power supply | - | |
| 29 | V _{DD} | 3.3V power supply | - | |
| 30 | R/L | Horizontal display mode select signal H : Normal , L : Left / Right reverse mode | I | 2) |
| 31 | U/D | Vertical display mode select signal H : Normal , L : Up / Down reverse mode | I | |
| 32 | NC | No connect | - | |
| 33 | V _{INB} | Power supply for LED backlight | - | |
| 34 | V _{INB} | Power supply for LED backlight | - | |
| 35 | V _{INB} | Power supply for LED backlight | - | |
| 36 | BLEN | Backlight ON-OFF (H : ON , L : OFF) | - | |
| 37 | VBRT | Brightness adjust voltage | - | |
| 38 | GNDB | GND for LED backlight | - | |
| 39 | GNDB | GND for LED backlight | - | |
| 40 | GNDB | GND for LED backlight | - | |

LCD connector : IMSA-9681S-40A-GF (IRISO)

Recommended matching FFC or FPC : 0.5mm pitch

- 1) The horizontal display start timing is settled in accordance with a rising timing of ENAB signal.
In case ENAB is fixed "Low", the horizontal start timing is determined.
Don't keep ENAB "High" during operation.

2)




R/L = H
U/D = H



R/L = L
U/D = H



R/L = H
U/D = L



R/L = L
U/D = L

7-2. Pin assignment of touch panel

| No. | Symbol | Description |
|-----|--------|------------------|
| 1 | xR | x-Right terminal |
| 2 | yL | y-Lower terminal |
| 3 | xL | x-Left terminal |
| 4 | yU | y-Upper terminal |

Touch panel side connector : 1.0mmpitch
Recommended matching connector : Series 9616 (IRISO)
: Series 9610 (IRISO)
: Series FMS (JST)

8. Input timing characteristics

8-1. Timing characteristics

| Item | | Symbol | Min | Typ | Max | Unit | Note |
|---|-------------|--------|------|-------|--------|---------|------|
| Clock | Frequency | 1/Tc | — | 25.18 | 28.33 | MHz | |
| | Duty ratio | Tch/Tc | 40 | 50 | 60 | % | |
| Data | Set up time | Tds | 5 | — | — | ns | |
| | Hold time | Tdh | 10 | — | — | ns | |
| Horizontal sync. signal | Cycle | TH | 30.0 | 31.8 | — | μ s | |
| | | | 770 | 800 | 900 | clock | |
| | Pulse width | THp | 2 | 96 | 200 | clock | |
| Vertical sync. signal | Cycle | TV | 515 | 525 | 560 | line | |
| | Pulse width | TVp | 2 | — | 34 | line | |
| Horizontal display period | | THd | 640 | | | clock | |
| H _{SYNC} – Clock phase difference | | THc | 10 | — | Tc-10 | ns | |
| H _{SYNC} - V _{SYNC} signal phase difference | | TVh | Tc | — | TH-THp | ns | |
| Vertical sync. signal start position | | TVs | 34 | | | line | |
| Vertical display period | | TVd | 240 | | | line | |

- 1) In case of lower frequency, the deterioration of the display quality, flicker etc., may occur.

8-2. Horizontal display position

| Item | | Symbol | Min | Typ | Max | Unit | Note |
|--|-------------|--------|-----|-----|--------|-------|------|
| Enable signal | Set up time | Tes | 5 | — | Tc-10 | ns | |
| | Pulse width | Tep | 2 | 640 | TH-10 | clock | |
| H _{SYNC} – Enable signal phase difference | | The | 44 | — | TH-664 | clock | |


- 1) When ENAB is fixed at "Low", the display starts from the data of C104(clock) as shown in 8-5.
 2) The horizontal display position is determined by ENAB signal.

8-3. Vertical display position


The vertical display position (TVs) is fixed at 34th line.

Note) ENAB signal is independent of vertical display position.

8-4. Input Data Signals and Display position on the screen

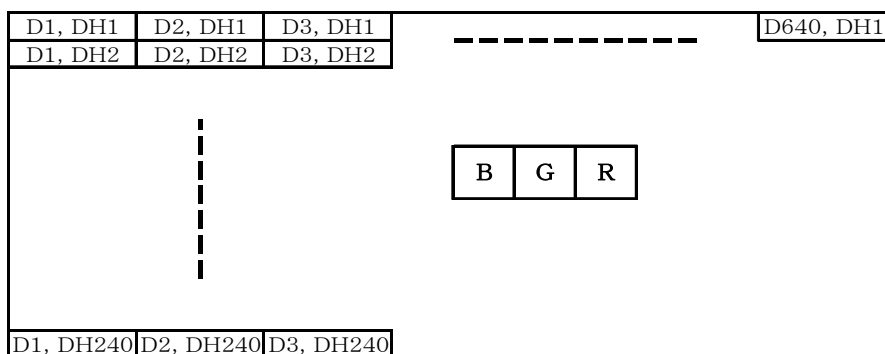

8-5. Input timing characteristics

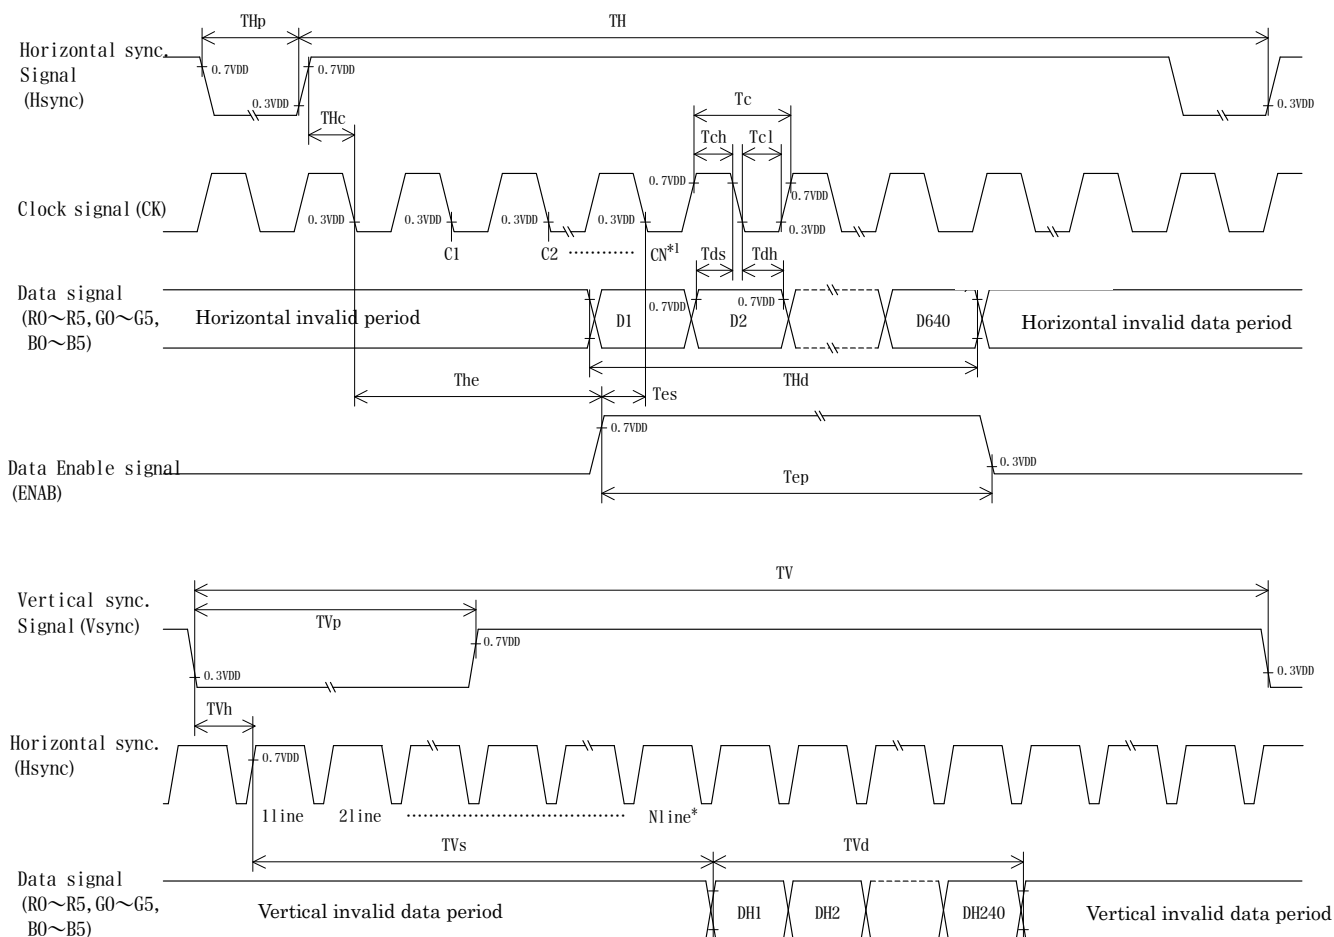


- 1) When ENAB is fixed at "Low", the display starts from the data of C104 (clock).
- 2) The vertical display position(TV_s) is fixed at 34 (line).

9. Backlight characteristics


Temp.=25°C

| Item | Symbol | Min. | Typ. | Max. | Unit | Note |
|----------------------------|------------------|----------------------|--------|---------------------|------|--|
| Supply voltage | V _{INB} | 3.0 | — | 5.5 | V | Ta=-20~70°C |
| ON-OFF (H) | BLEN | 0.8 V _{INB} | - | V _{INB} | V | - |
| ON-OFF (L) | | 0 | - | 0.2V _{INB} | V | - |
| LED forward current 1), 2) | I _F | 14 | 15 | 16 | mA | VBRT=0~1.4V |
| | | 2.8 | 3.0 | 3.2 | | VBRT=2.8V |
| Supply current | I _{INB} | - | 500 | 650 | mA | V _{INB} =3.3V, I _F =15mA |
| | | - | 320 | 420 | mA | V _{INB} =5.0V, I _F =15mA |
| Operating life time 3), 4) | T | - | 40,000 | - | h | I _F =15mA, Ta=25°C |

- 1) For each LED.
- 2) A forward current below 5.0mA may reduce the brightness uniformity of the LED backlight.
This is because the amount of light from each LED chip is different. Therefore, please evaluate carefully before finalizing the input current.
- 3) When brightness decrease 50% of minimum brightness.
The average life of a LED will decrease when the LCD is operating at higher temperatures.
- 4) Life time is estimated data. (Condition : I_F=15mA, Ta=25°C in chamber).
- 5) When you start-up, please charge in sequence of V_{INB}>BLEN, or VBRT. When you shut-down, please stop in sequence of BLEN and/or VBRT>V_{INB}.
- 6) Please do not connect the other than our backlight to this output connector on the PCB.
- 7) In case V_{DD} and V_{INB} are supplied by a single power source, V_{DD} & V_{INB}, and GND are connected directly and separately from the output on the power source. If the common wire are used for V_{DD} & V_{INB}, and for GND, and are split near the PCB, and connect to each LCD driving circuit and backlight driving circuit, a flicker might be occurred due to a ripple between the both circuit.

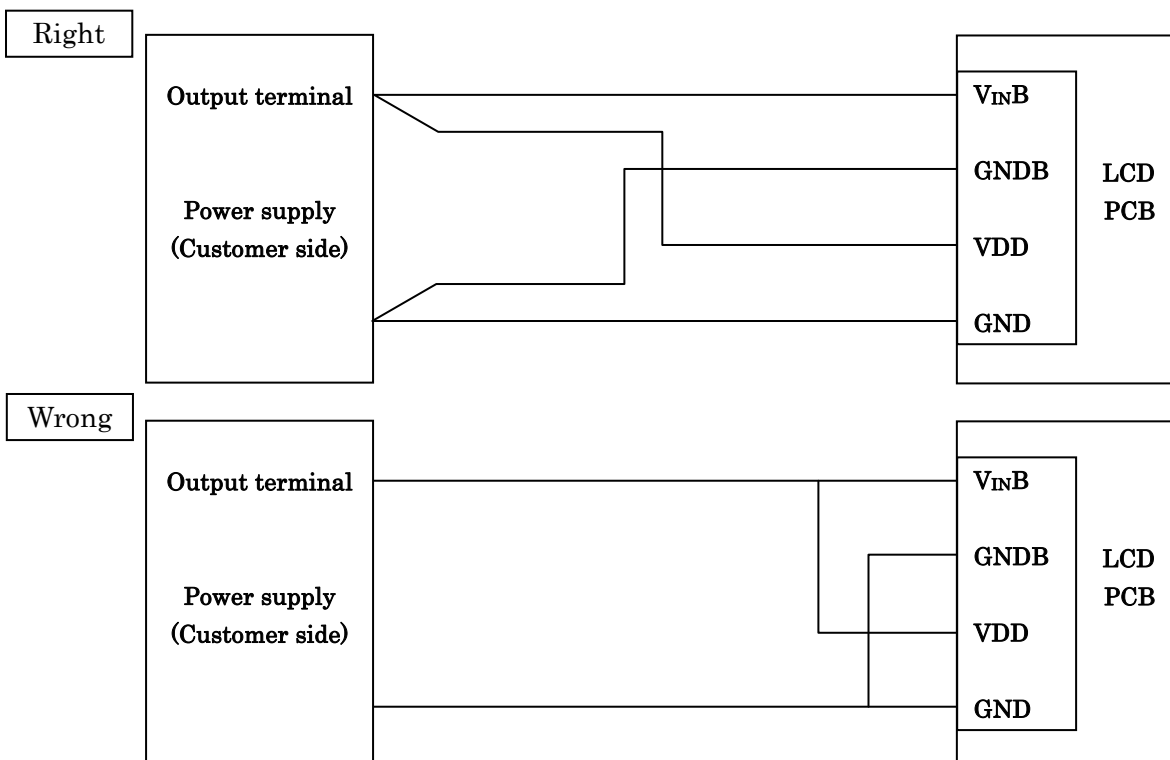

8) VBRT-IF characteristics

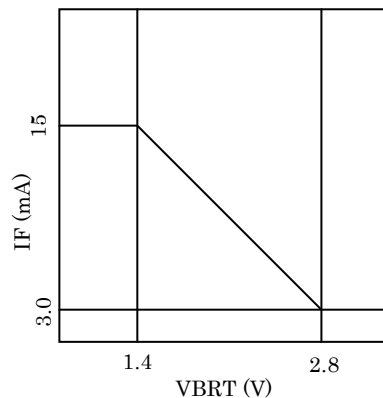

10. Design guidance for analog touch panel

10-1. Electrical (In customer's design, please remember the following considerations.)

- 1) Do not use the current regulated circuit.
- 2) Keep the current limit with top and bottom layer.
(Please refer to "Electrical absolute maximum ratings" for details.)
- 3) Analog touch panel can not sense two points touching separately.
- 4) A contact resistance is appeared at the touch point between top and bottom layer.
After this resistance has stable read of the touch panel position data.
- 5) Because noise of inverter or peripheral circuits may interfere signal of touch panel itself
it is necessary to design carefully in advance to avoid these noise problem.

10-2. Software

- 1) Do the "User Calibration".
- 2) "User Calibration" may be needed with long term using.
Include "User Calibration" menu in your software.
- 3) When drawing a line with a stylus, there may be a slight discontinuity when the stylus passes over a spacer-dot. If necessary, please provide a compensation feature within your software.

10-3. Mounting on display and housing bezel

- 1) Do not use an adhesive tape to bond it on the front of touch panel and hang it to the housing bezel.
- 2) This touch panel has an airtight but not watertight structure. Please not to use it for the applications requiring watertight or under the environments occurred condensation.
If it is expected to be exposed to the environments that vapor, moisture or other liquids may seep inside a bezel, please be sure to take some measurements for drip-proof or waterproof by using sealing materials on the bezel.
- 3) In cases where the touch panel is bent or twisted, Newton's Rings may become visible. Please do not attach the touch panel to the LCD with a bend or twist and use similar precautions when mounting the assembled unit in the final product. Furthermore, design the final product so that the touch panel is not bent during use.

11. Lot number identification

The lot number shall be indicated on the back of the backlight case of each LCD.

TCG062HVLBD-H20 - □□ - □□ - □ MADE IN □□□□□

↓ ↓ ↓ ↓ ↓ ↓
1 2 3 4 5

No1. - No5. above indicate

1. Year code
2. Month code
3. Date
4. Version Number
5. Country of origin (Japan or China)

| | | | | | | |
|------|------|------|------|------|------|------|
| Year | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 |
| Code | 0 | 1 | 2 | 3 | 4 | 5 |

| | | | | | | |
|-------|------|------|------|------|-----|------|
| Month | Jan. | Feb. | Mar. | Apr. | May | Jun. |
| Code | 1 | 2 | 3 | 4 | 5 | 6 |

| | | | | | | |
|-------|------|------|------|------|------|------|
| Month | Jul. | Aug. | Sep. | Oct. | Nov. | Dec. |
| Code | 7 | 8 | 9 | X | Y | Z |

12. Warranty

12-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

12-2. Production warranty

Kyocera warrants its LCD's for a period of 12 months from the ship date. Kyocera shall, by mutual agreement, replace or re-work defective LCD's that are shown to be Kyocera's responsibility.

13. Precautions for use

13-1. Installation of the LCD

- 1) The LCD shall be installed so that there is no pressure on the LSI chips.
- 2) The LCD shall be installed flat, without twisting or bending.
- 3) Please design the housing window so that its edges are between the active area and the effective area of the LCD screen.
Must maintain a gap between inside of bezel and touch panel to avoid malfunction or electrode damage of touch panel.
- 4) A transparent protection sheet is attached to the polarizer. Please remove the protection film slowly before use, paying attention to static electricity.

13-2. Static electricity

- 1) Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required.
- 2) Workers should use body grounding. Operator should wear ground straps.

13-3. LCD operation

- 1) The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.

13-4. Storage

- 1) The LCD shall be stored within the temperature and humidity limits specified.
Store in a dark area, and protect the LCD from direct sunlight or fluorescent light.
- 2) Always store the LCD so that it is free from external pressure onto it.

13-5. Usage


- 1) **DO NOT** store in a high humidity environment for extended periods. Polarizer degradation bubbles, and/or peeling off of the polarizer may result.
- 2) Do not push or rub the touch panel's surface with hard to sharp objects such as knives, or the touch panel may be scratched.
- 3) When the touch panel is dirty, gently wipe the surface with a soft cloth, sometimes moistened by mild detergent or alcohol. If a hazardous chemical is dropped on the touch panel by mistake, wipe it off right away to prevent human contact.
- 4) Touch panel edges are sharp. Handle the touch panel with enough care to prevent cuts.
- 5) Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizer.
- 6) Do not pull the LED lead wires and do not bend the root of the wires. Housing should be designed to protect LED lead wires from external stress.
- 7) Do not disassemble LCD because it will result in damage.
- 8) This Kyocera LCD has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.
- 9) Please do not use solid-base image pattern for long hours because a temporary afterimage may appear. We recommend using screen saver etc. in cases where a solid-base image pattern must be used.
- 10) Liquid crystal may leak when the LCD is broken. Be careful not to let the fluid go into your eyes and mouth. In the case the fluid touches your body; rinse it off right away with water and soap.

14. Reliability test data


| Test item | Test condition | Test time | Judgement |
|--------------------------------|---|--------------------------|--|
| High temp. atmosphere | 80°C | 240h | Display function : No defect Display quality : No defect Current consumption : No defect |
| Low temp. atmosphere | -30°C | 240h | Display function : No defect Display quality : No defect Current consumption : No defect |
| High temp. humidity atmosphere | 40°C 90% RH | 240h | Display function : No defect Display quality : No defect Current consumption : No defect |
| Temp. cycle | -30°C 0.5h R.T. 0.5h 80°C 0.5h | 10cycles | Display function : No defect Display quality : No defect Current consumption : No defect |
| High temp. operation | 70°C | 500h | Display function : No defect Display quality : No defect Current consumption : No defect |
| Point Activation 5) | Silicon rubber, Tip : R = 4.0 Hardness 60° Hitting force 2.94N Hitting speed 5 time/s | one million times | Touch panel function : No defect Terminal resistance : No defect Linearity : No defect Actuation Force : No defect No appearance defect which affects touch panel function. 6) |
| Sliding 5) | Polyacetal resin, Tip : R = 0.8 Load 2.45N Input length 10mm Input speed 50mm/s | 100 thousand times 7) | Touch panel function : No defect Terminal resistance : No defect Linearity : No defect Actuation Force : No defect No appearance defect which affects touch panel function. 6) |

- 1) Test in active area.
- 2) Dents, blurs and marks on surface film: neglected.
- 3) 10mm sliding (back and forth) counts as 2 times.
- 4) Temp. cycle test (Heat shock included): the LCD shall be tested after leaving it stabilize at room temperature for 2 hours after the last cycle.
- 5) An operational test was performed after the following conditions. First, the touch panel was left for a certain time under 5V voltages applied (without touch), Then it was left at room temperature (No VDC applied) for 2 hours.
- 6) Each test item uses a test LCD only once. The tested LCD is not used in any other tests.
- 7) The LCD is tested in circumstances in which there is no condensation.
- 8) The reliability test is not an out-going inspection.
- 9) The result of the reliability test is for your reference purpose only.
The reliability test is conducted only to examine the LCD's capability.

| | Name (名称) | Explanation (説明) |
|---|---------------------------------------|---|
| 1 | T.P. | Touch panel (タッチパネル) |
| 2 | T.P. Active Area (T.P. アクティブエリア) | Operating area of touch panel (タッチパネルの動作範囲) |
| 3 | T.P. Viewing Area (T.P. ビューイングエリア) | Warranty area of touch panel's appearance (タッチパネルの外観(傷・異物等)保証範囲) By giving pressure between the active area and the viewing area of the touch panel, there is a possibility that the touch panel will operate. (タッチパネルアクティブエリアとタッチパネルビューイングエリア間には荷重をかけた場合は、タッチパネルが動作する可能性があります。) |

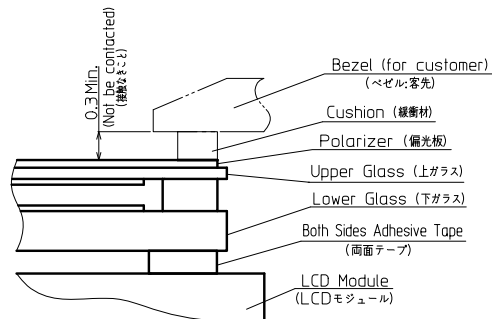

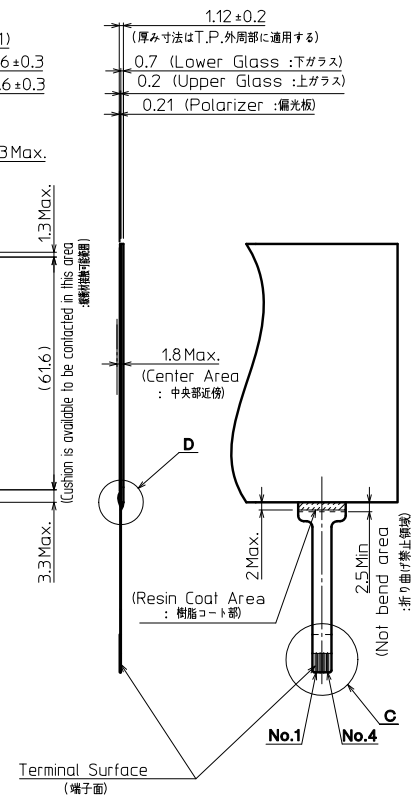


1. Fix touch panel at LCD module and the rear side of touch panel.
(タッチパネルの固定は、CDモジュール側とタッチパネル裏面とで行うこと)
2. Must maintain a gap between inside of bezel and touch panel to avoid malfunction or electrode damage of touch panel.
(ベゼル内側とタッチパネルの接触厳禁。誤動作や電極破損の原因となります)
3. Tolerance without indication: ± 0.5
(指示無き公差)





| No | Description | Drawn | Checked | Checked | Approved |
|----|-------------|-------|---------|---------|----------|
| | | | | | |
| | | | | | |
| | | | | | |

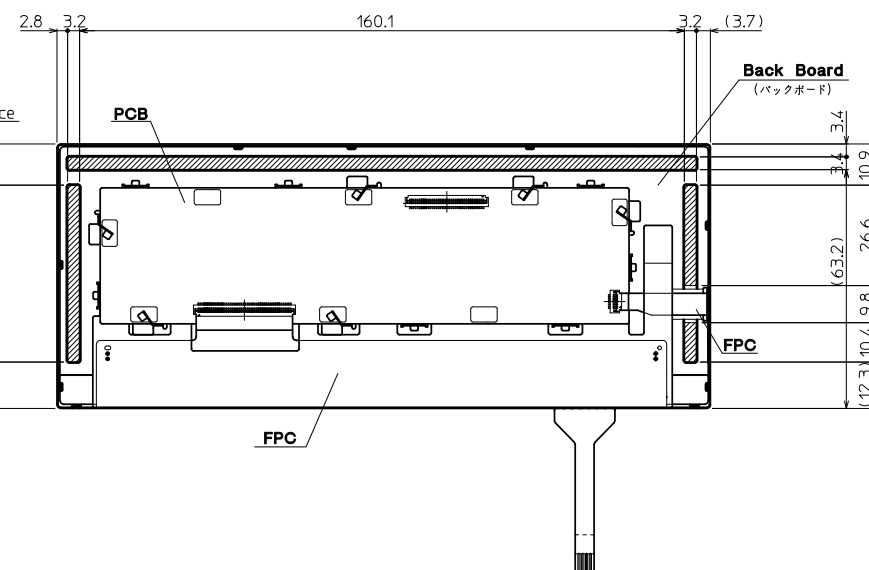

| | | | | | | | | | | |
|-----------------|--------------------------|-----------------------|---------|----------------------|-------------|---|-------------------------|---|-----------------------------|-----------|
| Material 材 質 | Treatment 処 理 | Approved '09.10.28 | Checked | Checked '09.10.28 | Drawn 木口 | Scale 1:1 (5:1,2:1,NTS) | Title TCG062HVLBD |  | Year-Month-Day '09.10.26 | Size 2 |
| Quantity 製作数 | Description: RoHS 備 考 | 朝倉 | | 鶴崎 | 木口 |  | T.P. Outline Dimensions | Drawing No. 121A8010600 | | 2/ |



1. PCBへの接触無きこと
(1. Do not allow any foreign material to contact the PCB.)
2. FPCエリア押さえないこと
(2. Do not use any part of the FPC area to hold the LCD module in place.)
3. PCB周りの板金突起部押さえないこと
(3. Do not apply pressure on the projected metal part of the PCB.)
4. モジュールがたわむこと無きよう押さえつけのこと
(4. Do not allow the LCD module to bend or twist.)
5. 広い範囲で均一に押さえることが望ましい
(5. Support the LCD with uniform pressure over as wide an area as possible.)

| | | | | | | | | | | | |
|-----------------|---------------------|-----------------------|---------|----------------------|-------|---|----------------------------------|-------------|---|-----------------------------|-----------|
| Material 材 質 | Treatment 処 理 | Approved '08.04.25 | Checked | Checked '08.04.25 | Drawn | Scale 1:1(NTS) | Title TCG062HVLB* without T/P | |  | Year-Month-Day '08.04.22 | Size 2 |
| Quantity 製作数 | Description: 備 考 | RoHS 朝倉 | | 鶴崎 | 茶圓 |  | Module Installation | Drawing No. | 121A5074900-2 | | |

| | |
|----------|-----------------------|
| Spec No. | TQ3C-8EAF0-E2DEY22-00 |
| Date | April 15, 2010 |

KYOCERA INSPECTION STANDARD

TYPE : TCG062HVLBD-H20

KYOCERA CORPORATION
KAGOSHIMA HAYATO PLANT
LCD DIVISION

| Original Issue Date | Designed by : Engineering dept. | | | Confirmed by : QA dept. | |
|------------------------|---------------------------------|--------------------|---------------------|-------------------------|---------------|
| | Prepared | Checked | Approved | Checked | Approved |
| April 15, 2010 | <i>Y. Ikeda</i> | <i>Y. Yamazaki</i> | <i>Y. Matsumoto</i> | <i>J. Sakaguchi</i> | <i>T. Aki</i> |





| | | |
|-----------------------------------|-----------------------------|-----------|
| Spec No. TQ3C-8EAF0-E2DEY22-00 | Part No. TCG062HVLBD-H20 | Page - |
|-----------------------------------|-----------------------------|-----------|

Revision record

| Date | | Designed by : Engineering dept. | | | Confirmed by : QA dept. | |
|---------|------|---------------------------------|--------------|----------|-------------------------|----------|
| | | Prepared | Checked | Approved | Checked | Approved |
| | | | | | | |
| Rev.No. | Date | Page | Descriptions | | | |
| | | | | | | |






Visuals specification

1) Note
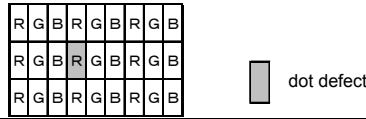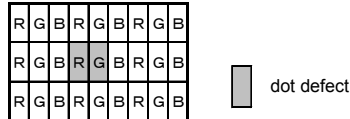
| | Note | | |
|-------------------------------|--|---|--|
| General | <ol style="list-style-type: none"> Customer identified anomalies not defined within this inspection standard shall be reviewed by Kyocera, and an additional standard shall be determined by mutual consent. This inspection standard about the image quality shall be applied to any defect within the active area and shall not be applicable to outside of the area. Inspection conditions <ul style="list-style-type: none"> Luminance : 500 Lux min. Inspection distance : 300 mm. Temperature : $25 \pm 5^{\circ}\text{C}$ Direction : Directly above | | |
| Definition of inspection item | Dot defect | Bright dot defect | <p>The dot is constantly “on” when power applied to the LCD, even when all “Black” data sent to the screen.</p> <p>Inspection tool: 5% Transparency neutral density filter.</p> <p>Count dot: If the dot is visible through the filter.</p> <p>Don't count dot: If the dot is not visible through the filter.</p>  |
| | | Black dot defect | <p>The dot is constantly “off” when power applied to the LCD, even when all “White” data sent to the screen.</p> |
| | | Adjacent dot | <p>Adjacent dot defect is defined as two or more bright dot defects or black dot defects.</p>  |
| | External inspection | Bubble, Scratch, Foreign particle (Polarizer, Cell, Backlight) | Visible operating (all pixels “Black” or “White”) and non operating. |
| | | Appearance inspection | Does not satisfy the value at the spec. |
| | Others | LED wire | Damaged to the LED wire, connector, pin, functional failure or appearance failure. |
| | Definition of size | <div>Definition of circle size</div>  $d = (a + b) / 2$ <div>Definition of linear size</div>  | |

2) Standard

| Classification | | Inspection item | | Judgement standard | | |
|--|---|---------------------|---------------------------------|--|-------------------|-------------------|
| Defect (in LCD glass) | Dot defect | Bright dot defect | | Acceptable number : 4 Bright dot spacing : 5 mm or more | | |
| | | Black dot defect | | Acceptable number : 5 Bright dot spacing : 5 mm or more | | |
| | | 2 dot join | Bright dot defect | Acceptable number : 2 | | |
| | | | Black dot defect | Acceptable number : 3 | | |
| | | 3 or more dots join | | Acceptable number : 0 | | |
| | | Total dot defects | | Acceptable number : 5 Max | | |
| | | Others | White dot, Dark dot (Circle) | | | |
| | Size (mm) | | | | Acceptable number | |
| | d ≤ 0.2 | | | | (Neglected) | |
| 0.2 < d ≤ 0.4 | | | | | 5 | |
| 0.4 < d ≤ 0.5 | | | | | 3 | |
| 0.5 < d | | | | | 0 | |
| External inspection (Defect on Polarizer or between Polarizer and LCD glass) | Polarizer (Scratch) | | | | | |
| | | | Width (mm) | | Length (mm) | Acceptable number |
| | | | W ≤ 0.1 | | — | (Neglected) |
| | | | 0.1 < W ≤ 0.3 | L ≤ 5.0 | | (Neglected) |
| | | | | 5.0 < L | | 0 |
| | 0.3 < W | | — | 0 | | |
| | Polarizer (Bubble) | | | | | |
| | | | Size (mm) | | Acceptable number | |
| | | | d ≤ 0.2 | | (Neglected) | |
| | | | 0.2 < d ≤ 0.3 | | 5 | |
| | | | 0.3 < d ≤ 0.5 | | 3 | |
| | 0.5 < d | | 0 | | | |
| | Foreign particle (Circular shape) | | | | | |
| | | | Size (mm) | | Acceptable number | |
| | | | d ≤ 0.2 | | (Neglected) | |
| | | | 0.2 < d ≤ 0.4 | | 5 | |
| | | | 0.4 < d ≤ 0.5 | | 3 | |
| | 0.5 < d | | 0 | | | |
| | Foreign particle (Linear shape) Scratch | | | | | |
| | | | Width (mm) | | Length (mm) | Acceptable number |
| | | | W ≤ 0.03 | | — | (Neglected) |
| 0.03 < W ≤ 0.1 | | | L ≤ 2.0 | | (Neglected) | |
| | | | 2.0 < L ≤ 4.0 | | 3 | |
| | | | 4.0 < L | | 0 | |
| 0.1 < W | | | — | (According to circular shape) | | |
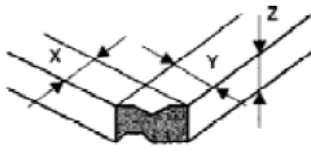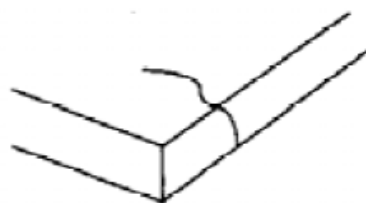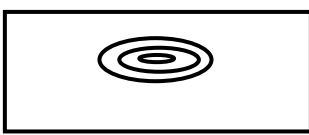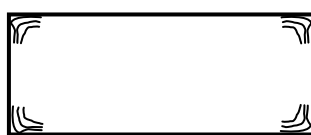
| Inspection item | Judgement standard | | | |
|---|---|--|---|---------------------------------------|
| Scratch, Foreign particle (Touch screen portion) | (W = Width, L = Length, D = Diameter = (major axis + minor axis)/ 2) | | | |
| | Item | Width(mm) | Length(mm) | Acceptable number |
| | Scratch | $W \leq 0.03$ | $L \leq 20$ | Neglected |
| | | $0.03 < W \leq 0.05$ | $L \leq 10$ | 2pcs within $\varnothing 20\text{mm}$ |
| | | $0.05 < W \leq 0.08$ | $L \leq 6$ | 2pcs within $\varnothing 20\text{mm}$ |
| | | $0.08 < W \leq 0.1$ | $L \leq 4$ | 1pcs within $\varnothing 30\text{mm}$ |
| | Foreign (line like) | $W \leq 0.05$ | Neglected | Neglected |
| | | $0.05 < W \leq 0.1$ | $L \leq 5$ | 2pcs within $\varnothing 30\text{mm}$ |
| | Foreign (circle like) | $D \leq 0.2$ | | Neglected |
| | | $0.2 < D \leq 0.3$ | | 2pcs within $\varnothing 30\text{mm}$ |
| Above are applied to the visible area. Unless there are foreign particle and damage affected seriously to the electrical performance out of the active area, we approve of this product. | | | | |
| lass crack (Touch screen portion) | Item | Size (mm) | | Acceptable number |
| | Conner crack |  | | 2 pcs /panel |
| | | X | ≤ 3 | |
| | | Y | ≤ 3 | |
| | Crack in other area than in corner |  | | 2 pcs /side |
| | | X | ≤ 5 | |
| | | Y | ≤ 1.5 | |
| | Progressive crack |  | | 0 pcs (NG even 1pcs) |
| | | | | |
| | | | | |
| Above are applied to the visible area. Unless there are foreign particle and damage affected seriously to the electrical performance out of the active area, we approve of this product. | | | | |
| Newton's ring | All Newton Rings in the center of the screen must be rejected. Border around the screen are permitted. | | | |
| |  | |  | |
| | NG | | OK | |