

**SPEC**

Spec No.	TQ3C-8EAF0-E1DEX53-00
Date	April 8, 2010

**TYPE : TCG075VGLBE-H20**

< 7.5inch VGA transmissive color TFT with LED backlight,  
constant current circuit for LED backlight and touch panel>

**CONTENTS**

1. Application
2. Construction and outline
3. Mechanical specifications
4. Absolute maximum ratings
5. Electrical characteristics
6. Optical characteristics
7. Interface signals
8. Input timing characteristics
9. Backlight characteristics
10. Design guidance for analog touch-panel
11. Lot number identification
12. Warranty
13. Precautions for use
14. Reliability test data
15. Outline drawing



KYOCERA CORPORATION  
KAGOSHIMA HAYATO PLANT  
LCD DIVISION

This specification is subject to change without notice.  
Consult Kyocera before ordering.

Original Issue Date	Designed by: Engineering dept.			Confirmed by: QA dept.	
	Prepared	Checked	Approved	Checked	Approved
April 8, 2010					

Spec No.	Part No.	Page
TQ3C-8EAFO-E1DEX53-00	TCG075VGLBE-H20	-

## **Warning**

1. This Kyocera LCD module has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the module in such applications.
  
2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs, and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera modules in applications.

## **Caution**

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.

Spec No. TQ3C-8EAF0-E1DEX53-00	Part No. TCG075VGLBE-H20	Page -
-----------------------------------	-----------------------------	-----------

### Revision record

Date	Designed by : Engineering dept.			Confirmed by : QA dept.	
	Prepared	Checked	Approved	Checked	Approved
Rev.No.	Date	Page	Descriptions		

Spec No. TQ3C-8EAF0-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 1
-----------------------------------	-----------------------------	-----------

## 1. Application

This document defines the specification of TCG075VGLBE-H20. (RoHS Compliant)

## 2. Construction and outline

LCD	: Transmissive color dot matrix type TFT
Backlight system	: LED
Polarizer	: Glare treatment
Additional circuit	: Timing controller, Power supply (3.3V input) (with constant current circuit for LED Backlight)
Touch panel	: Analog type(Glass/Glass)
Surface film	: Glare Anti-reflection treatment

## 3. Mechanical specifications

### 3-1. LCD

Item	Specification	Unit
Outline dimensions 1)	173(W)×133(H)×7.57(D)	mm
Active area	151.68(W)×113.76(H) (18.9cm/7.5 inch(Diagonal))	mm
Effective viewing area	153.7(W)×115.8(H)	mm
Dot format	640×(R,G,B)(W)×480(H)	dot
Dot pitch	0.079(W)×0.237(H)	mm
Base color 2)	Normally White	-
Mass	275	g

- 1) Projection not included. Please refer to outline for details.
- 2) Due to the characteristics of the LCD material, the color varies with environmental temperature.

### 3-2. Touch panel

Item	Specification	Unit
Input	Radius-0.8 stylus or Finger	-
Actuation Force	TBD	N
Operating life	Striking(Finger-input) 1)	TBD
	Sliding(Stylus–input) 2)	hits
Surface hardness	2H or more(Pencil hardness)	characters

Spec No.	Part No.	Page
TQ3C-8EAF0-E1DEX53-00	TCG075VGLBE-H20	2

1) Striking test condition

Testing rod : Silicon rubber (Hardness: TBD), Tip : TBD,  
 Testing location : In active area  
 Input voltage : TBD V  
 Load : TBD N  
 Cycle : TBD hits/sec  
 Judgment : No defect in function  
               : No appearance defect which causes trouble to use.  
               \*Dents, blurs and marks on surface film : neglected

2) Sliding test condition

Testing rod : Polyacetal resin, Tip : TBD  
 Testing location : In active area  
 Input voltage : TBD V  
 Load : TBD N  
 Input length : TBD mm  
 Input speed : TBD mm/sec  
 Sliding times : 10mm sliding (back and forth) counts as 2 times.  
 Judgment : No defect in function  
               : No appearance defect which causes trouble to use.  
               \*Dents, blurs and marks on surface film : neglected

Spec No. TQ3C-8EAF0-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 3
-----------------------------------	-----------------------------	-----------

## 4. Absolute maximum ratings

### 4-1. Electrical absolute maximum ratings

Item	Symbol	Min.	Max.	Unit
Supply voltage for logic	V <sub>DD</sub>	0	4.0	V
Input signal voltage 1)	V <sub>IN</sub>	-0.3	6.0	V
Supply voltage for backlight	V <sub>INB</sub>	0	6.0	V
Backlight ON-OFF	BLEN	0	V <sub>INB</sub>	V
Brightness adjust voltage	VBRT	0	V <sub>INB</sub>	V
Supply voltage for touch panel	V <sub>TP</sub>	0	6.0	V
Input current of touch panel	I <sub>TP</sub>	0	0.5	mA

- 1) Input signal : CK, R0~R5, G0~G5, B0~B5, HSYNC, VSYNC, ENAB, R/L, U/D

### 4-2. Environmental absolute maximum ratings

Item	Symbol	Min.	Max.	Unit
Operating temperature 1)	T <sub>OP</sub>	-20	70	°C
Storage temperature 2)	T <sub>STO</sub>	-30	80	°C
Operating humidity 3)	H <sub>OP</sub>	10	4)	%RH
Storage humidity 3)	H <sub>STO</sub>	10	4)	%RH
Vibration	-	5)	5)	-
Shock	-	6)	6)	-

- 1) Operating temperature means a temperature which operation shall be guaranteed. Since display performance is evaluated at 25°C, another temperature range should be confirmed.
- 2) Temp. = -30°C < 48h , Temp. = 80°C < 168h  
 Store LCD at normal temperature/humidity. Keep them free from vibration and shock. An LCD that is kept at a low or a high temperature for a long time can be defective due to other conditions, even if the low or high temperature satisfies the standard.  
 (Please refer to "Precautions for Use" for details.)
- 3) Non-condensing
- 4) Temp.  $\leq$  40°C, 85%RH Max.  
 Temp. > 40°C, Absolute humidity shall be less than 85%RH at 40°C.
- 5)

Frequency	10~55 Hz	Acceleration value (0.3~9 m/s <sup>2</sup> )
Vibration width	0.15mm	
Interval	10-55-10 Hz	1 minutes

2 hours in each direction X, Y, Z (6 hours total)

EIAJ ED-2531

- 6) Acceleration: 490 m/s<sup>2</sup>, Pulse width: 11 ms

3 times in each direction: ±X, ±Y, ±Z

EIAJ ED-2531

Spec No. TQ3C-8EAF0-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 4
-----------------------------------	-----------------------------	-----------


## 5. Electrical characteristics

### 5-1. LCD

Temp. = -20~70°C


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage 1)	V <sub>DD</sub>	-	3.0	3.3	3.6	V
Current consumption	I <sub>DD</sub>	2)	-	300	390	mA
Permissive input ripple voltage	V <sub>RP</sub>	-	-	-	100	mVp·p
Input signal voltage 3)	V <sub>IL</sub>	"Low" level	0	-	0.3V <sub>DD</sub>	V
	V <sub>IH</sub>	"High" level	0.7V <sub>DD</sub>	-	V <sub>DD</sub>	V

1) V<sub>DD</sub>-turn-on conditions

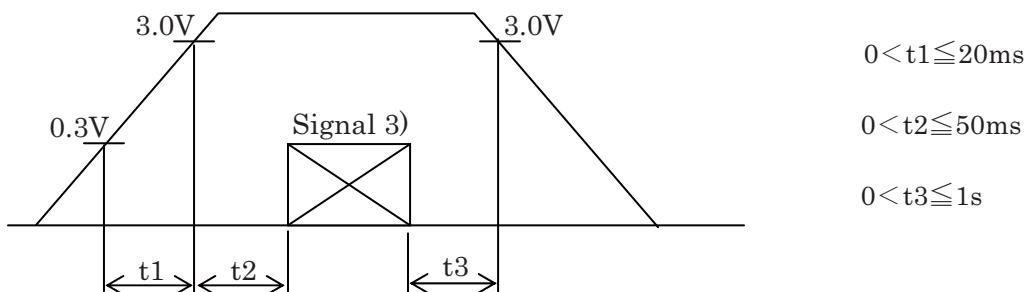

2) Display pattern:

V<sub>DD</sub> = 3.3V, Temp. = 25°C

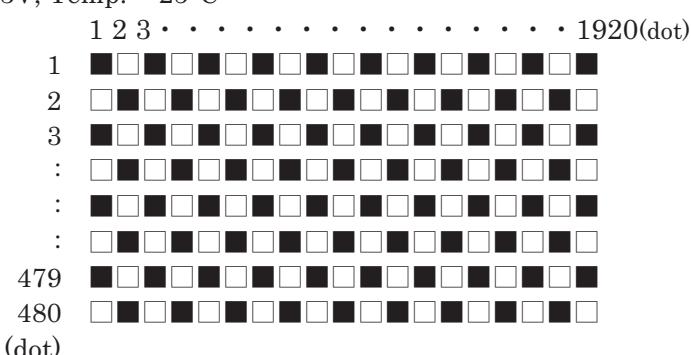


3) Input signal : CK, R0~R5, G0~G5, B0~B5, HSYNC, VSYNC, ENAB, R/L, U/D

Spec No. TQ3C-8EAFO-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 5
-----------------------------------	-----------------------------	-----------


## 5-2. Touch panel

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage for touch panel	V <sub>TP</sub>	-	-	5.0	-	V
Terminal resistance 1)	xL-xR	-	TBD	-	TBD	Ω
	yU-yL	-	TBD	-	TBD	Ω
Linearity 2)	-	-	less than ±2.5			%
Insulation resistance 3)	-	DC25V	50	-	-	MΩ
Chattering 4)	-	at ON/OFF	less than 10			ms

- 1) Resistance between terminal xL and xR, or between yU and yL
- 2) Apply 5VDC to the terminal xL-xR, and measure the output voltage at terminal y when a random input is applied in the active area. Measure the difference between the output and theoretical voltages. (Measure the actual voltage at the terminal using the same method.)

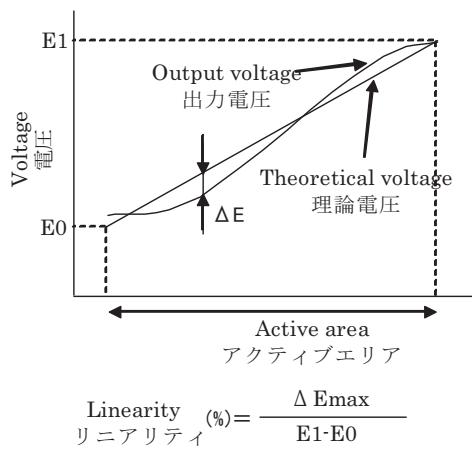

- 3) Resistance between the upper and lower terminals.
- 4) Apply 5VDC to the terminal xL-xR, and measure the oscillation at terminal y when applying a random input in the active area. (Measure the oscillation at terminal x using the same method.)

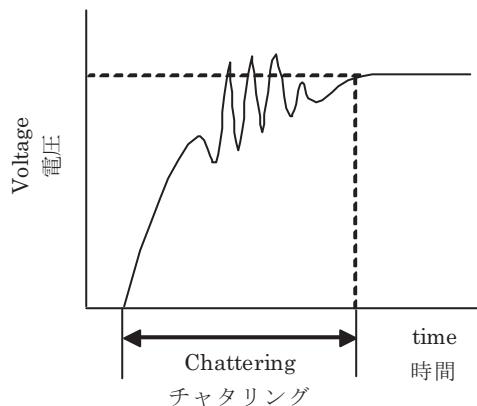

Spec No. TQ3C-8EAFO-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 6
-----------------------------------	-----------------------------	-----------

6. Optical characteristics

Measuring spot =  $\phi$  6.0mm, Temp. = 25°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
Response time	Rise	$\tau_r$	$\theta = \phi = 0^\circ$	-	5	-	ms
	Down	$\tau_d$	$\theta = \phi = 0^\circ$	-	15	-	ms
Viewing angle range View direction : 6 o'clock (Gray inversion)	$\theta_{UPPER}$	CR $\geq 5$	-	50	-	deg.	
	$\theta_{LOWER}$		-	70	-		
	$\phi_{LEFT}$		-	70	-		
	$\phi_{RIGHT}$		-	70	-		
Contrast ratio	CR	$\theta = \phi = 0^\circ$	300	450	-	-	
Brightness	L	IF=15mA/Line	150	210	-	cd/m <sup>2</sup>	
Chromaticity coordinates	Red	x	$\theta = \phi = 0^\circ$	(0.55)	(0.60)	(0.65)	-
		y		(0.31)	(0.36)	(0.41)	
	Green	x	$\theta = \phi = 0^\circ$	(0.29)	(0.34)	(0.39)	
		y		(0.54)	(0.59)	(0.64)	
	Blue	x	$\theta = \phi = 0^\circ$	(0.10)	(0.15)	(0.20)	
		y		(0.07)	(0.12)	(0.17)	
	White	x	$\theta = \phi = 0^\circ$	(0.27)	(0.32)	(0.37)	
		y		(0.29)	(0.34)	(0.39)	

6-1. Definition of contrast ratio


$$CR(\text{Contrast ratio}) = \frac{\text{Brightness with all pixels "White"}}{\text{Brightness with all pixels "Black"}}$$

6-2. Definition of response time


The graph shows two sigmoidal curves representing the brightness transition of a liquid crystal panel. The vertical axis is labeled 'Brightness' with markings at 100%, 90%, and 10%. The horizontal axis represents time. The left curve, labeled 'White' at its peak, represents the fall time  $\tau_d$  as it transitions from 90% to 10% brightness. The right curve, also labeled 'White' at its peak, represents the rise time  $\tau_r$  as it transitions from 10% to 90% brightness. The middle curve, labeled 'Black' at its minimum, represents the intermediate state between the two transitions.

M804001

### 6-3. Definition of viewing angle

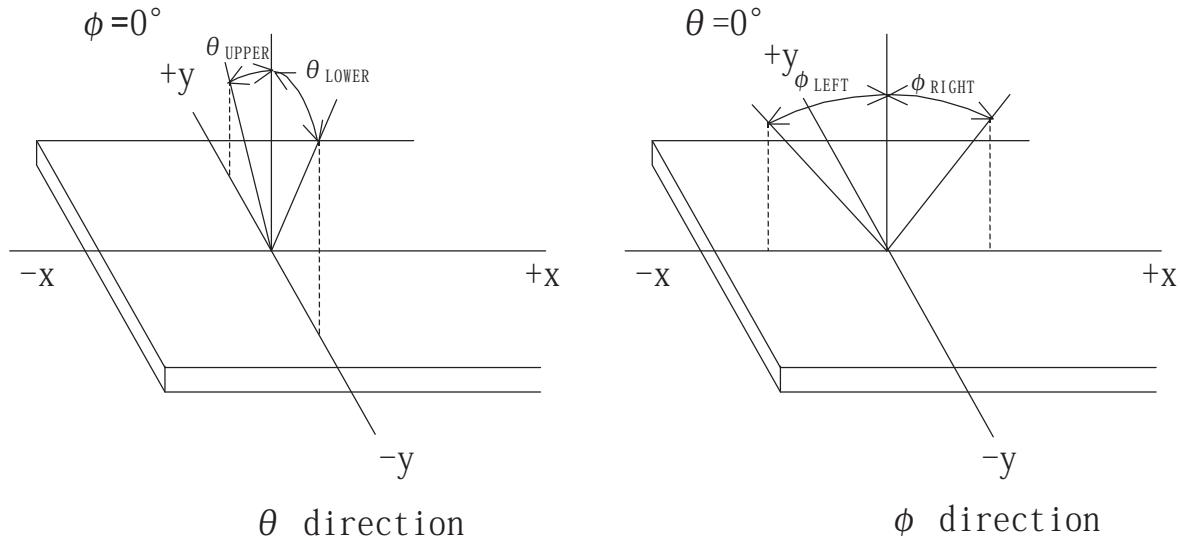

### 6-4. Brightness measuring points

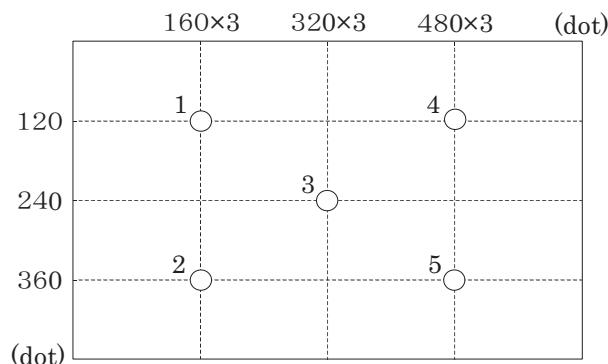

- 1) Rating is defined on the average in the viewing area. (measured point 1~5)
- 2) Measured 30 minutes after the LED is powered on. (Ambient temp. = 25°C)

Spec No. TQ3C-8EAFO-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 8
-----------------------------------	-----------------------------	-----------

## 7. Interface signals

### 7-1. LCD

No.	Symbol	Description	I/O	Note
1	GND	GND	-	
2	CK	Clock signal for sampling each data signal	I	
3	H <sub>SYNC</sub>	Horizontal synchronous signal (negative)	I	
4	V <sub>SYNC</sub>	Vertical synchronous signal (negative)	I	
5	GND	GND	-	
6	R0	RED data signal (LSB)	I	
7	R1	RED data signal	I	
8	R2	RED data signal	I	
9	R3	RED data signal	I	
10	R4	RED data signal	I	
11	R5	RED data signal (MSB)	I	
12	GND	GND	-	
13	G0	GREEN data signal (LSB)	I	
14	G1	GREEN data signal	I	
15	G2	GREEN data signal	I	
16	G3	GREEN data signal	I	
17	G4	GREEN data signal	I	
18	G5	GREEN data signal (MSB)	I	
19	GND	GND	-	
20	B0	BLUE data signal (LSB)	I	
21	B1	BLUE data signal	I	
22	B2	BLUE data signal	I	
23	B3	BLUE data signal	I	
24	B4	BLUE data signal	I	
25	B5	BLUE data signal (MSB)	I	
26	GND	GND	-	
27	ENAB	Signal to settle the horizontal display position (positive)	I	1)
28	V <sub>DD</sub>	3.3V power supply	-	
29	V <sub>DD</sub>	3.3V power supply	-	
30	R/L	Horizontal display mode select signal L : Normal , H : Left / Right reverse mode	I	2)
31	U/D	Vertical display mode select signal H : Normal , L : Up / Down reverse mode	I	2)
32	NC	No connect	-	
33	V <sub>INB</sub>	Power supply for LED backlight	-	
34	V <sub>INB</sub>	Power supply for LED backlight	-	
35	V <sub>INB</sub>	Power supply for LED backlight	-	
36	BLEN	Backlight ON-OFF (H:ON, L:OFF)	-	
37	VBRT	Brightness adjust voltage	-	
38	GNDB	GND for LED backlight	-	
39	GNDB	GND for LED backlight	-	
40	GNDB	GND for LED backlight	-	

LCD connector

: IMSA-9681S-40A-GF (IRISO)

Recommended matching FFC or FPC

: 0.5mm pitch

Spec No. TQ3C-8EAF0-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 9
-----------------------------------	-----------------------------	-----------

- 1) The horizontal display start timing is settled in accordance with a rising timing of ENAB signal.  
 In case ENAB is fixed "Low", the horizontal start timing is determined.  
 Don't keep ENAB "High" during operation.

2)



R/L = L  
U/D = H



R/L = H  
U/D = H



R/L = L  
U/D = L



R/L = H  
U/D = L

### 7-3. Touch panel

No.	Symbol	Description
1	yU	y·Upper terminal
2	xL	x·Left terminal
3	yL	y·Lower terminal
4	xR	x·Right terminal

Touch panel side connector : 1.25mm pitch

Recommended matching connector : 04FFS-SP-GB-TF(LF)(SN) (JST)  
                                       : 00-8370-049-000-888+ (ELCO)

Spec No. TQ3C-8EAF0-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 10
-----------------------------------	-----------------------------	------------

## 8. Input timing characteristics

### 8-1. Timing characteristics

Item		Symbol	Min	Typ	Max	Unit	Note
Clock	Frequency	1/Tc	—	25.18	28.33	MHz	
	Duty ratio	Tch/Tc	40	50	60	%	
Data	Set up time	Tds	5	—	—	ns	
	Hold time	Tdh	10	—	—	ns	
Horizontal sync. signal	Cycle	TH	30.0	31.8	—	$\mu$ s	
			770	800	900	clock	
	Pulse width	THp	2	96	200	clock	
Vertical sync. signal	Cycle	TV	515	525	560	line	
	Pulse width	TVp	2	—	34	line	
Horizontal display period		THd	640			clock	
Hsync,-Clock phase difference		THc	10	—	Tc-10	ns	
Hsync-Vsync. phase difference		TVh	Tc	—	TH-THp	ns	
Vertical sync. signal start position		TVs	34			line	
Vertical display period		TVd	480			line	

- 1) In case of lower frequency, the deterioration of the display quality, flicker etc., may occur.

### 8-2. Horizontal display position


Item		Symbol	Min	Typ	Max	Unit	Note
Enable signal	Set up time	Tes	5	—	Tc-10	ns	
	Pulse width	Tep	2	640	TH-10	clock	
Hsync - Enable signal phase difference		The	44	—	TH-340	clock	

- 1) When ENAB is fixed at "Low", the display starts from the data of C104(clock) as shown in 8-5.  
 2) The horizontal display position is determined by ENAB signal.


### 8-3. Vertical display position

- 1) The vertical display position (TVs) is 34th line.  
 2) ENAB signal is independent of vertical display position.

#### 8-4. Input Data Signals and Display position on the screen

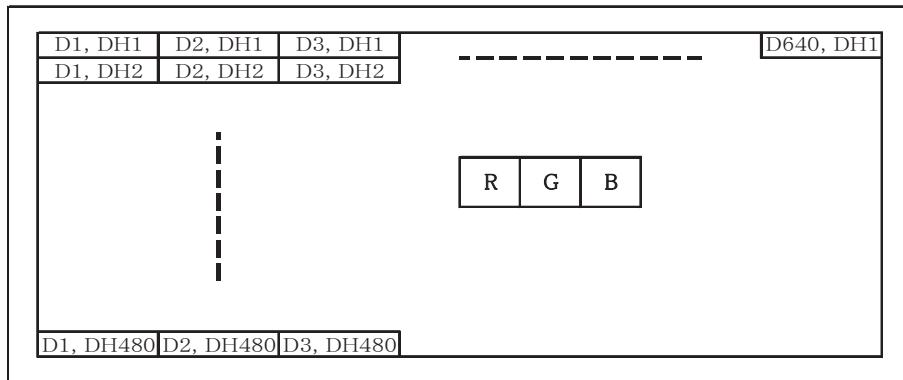

#### 8-5. Input timing characteristics

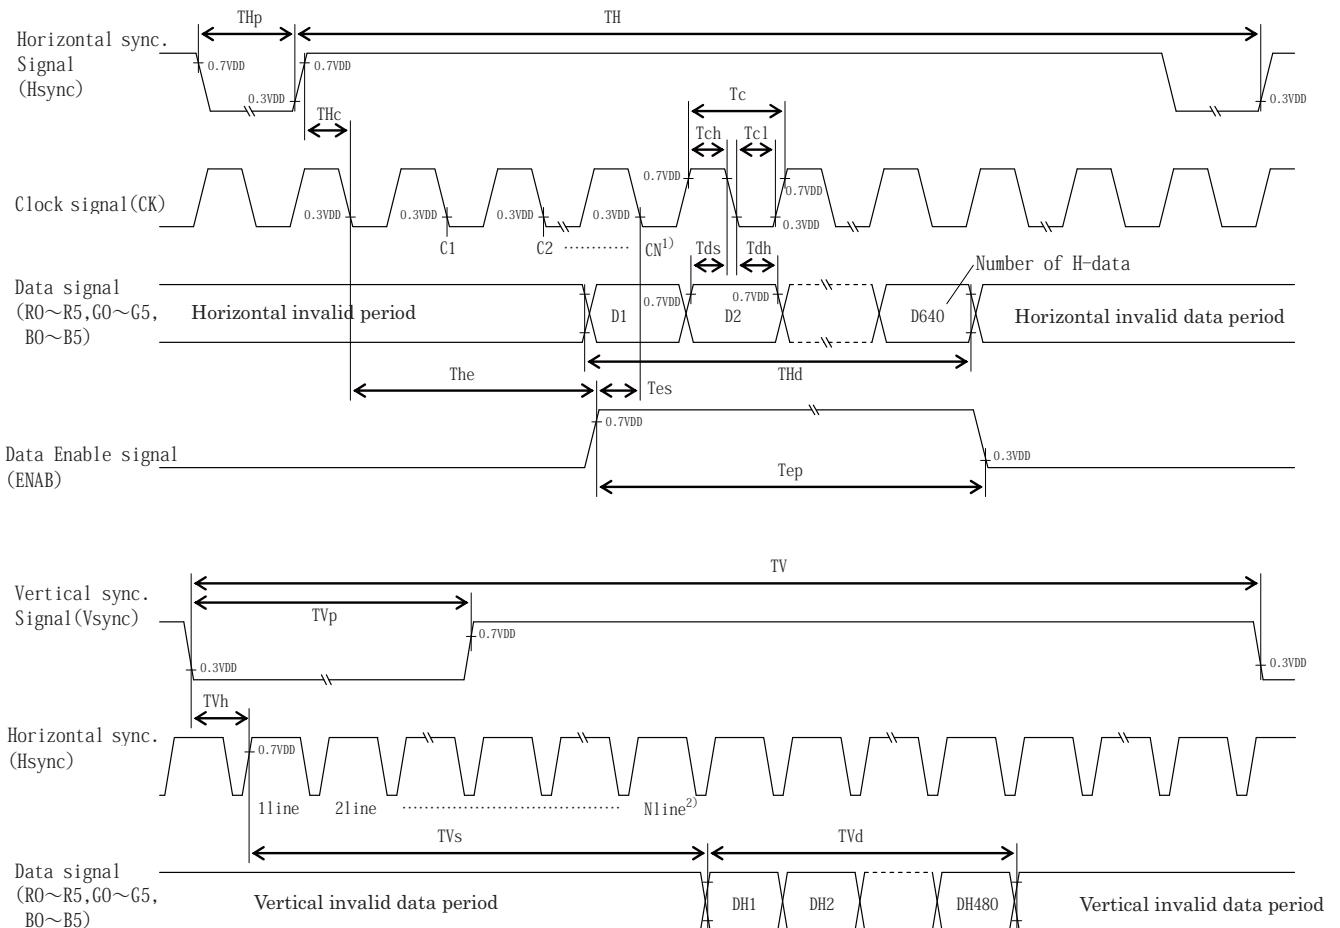

- 1) When ENAB is fixed at "Low", the display starts from the data of C104(Clock).
- 2) The vertical display position(TVs) is fixed at 34th line.

Spec No. TQ3C-8EAF0-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 12
-----------------------------------	-----------------------------	------------


## 9. Backlight characteristics

Temp.=25°C


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply voltage	V <sub>INB</sub>	3.0	-	5.5	V	T <sub>a</sub> =-20~70°C
ON-OFF (H)	BLEN	0.8V <sub>INB</sub>	-	V <sub>INB</sub>	V	-
ON-OFF (L)		0.0	-	0.2V <sub>INB</sub>	V	-
LED forward current 1) 2)	IF	14	15	16	mA	VBRT=0~1.4V
		2.8	3.0	3.2		VBRT=2.8V
Supply current	I <sub>INB</sub>	-	510	660	mA	V <sub>INB</sub> =3.3V, IF=15mA
		-	330	430		V <sub>INB</sub> =5.0V, IF=15mA
Operating life 3) 4)	T	-	40,000	-	H	IF=15mA, T <sub>a</sub> =25°C

- 1) For each LED.
- 2) A forward current below 5.0mA may reduce the brightness uniformity of the LED backlight.  
This is because the amount of light from each LED chip is different. Therefore, please evaluate carefully before finalizing the input current.
- 3) When brightness decrease 50% of minimum brightness.  
The average life of a LED will decrease when the LCD is operating at higher temperatures.
- 4) Life time is estimated data. (Condition : IF=15mA, T<sub>a</sub>=25°C in chamber).
- 5) When you start-up, please charge in sequence of V<sub>INB</sub>->BLEN, or VBRT. When you shut-down, please stop in sequence of BLEN and/or VBRT->V<sub>INB</sub>.
- 6) Please do not connect the other than our backlight to this output connector on the PCB.
- 7) In case V<sub>DD</sub> and V<sub>INB</sub> are supplied by a single power source, V<sub>DD</sub> & V<sub>INB</sub>, and GND are connected directly and separately from the output on the power source. If the common wire are used for V<sub>DD</sub> & V<sub>INB</sub>, and for GND, and are split near the PCB, and connect to each LCD driving circuit and backlight driving circuit, a flicker might be occurred due to a ripple between the both circuit.


Right

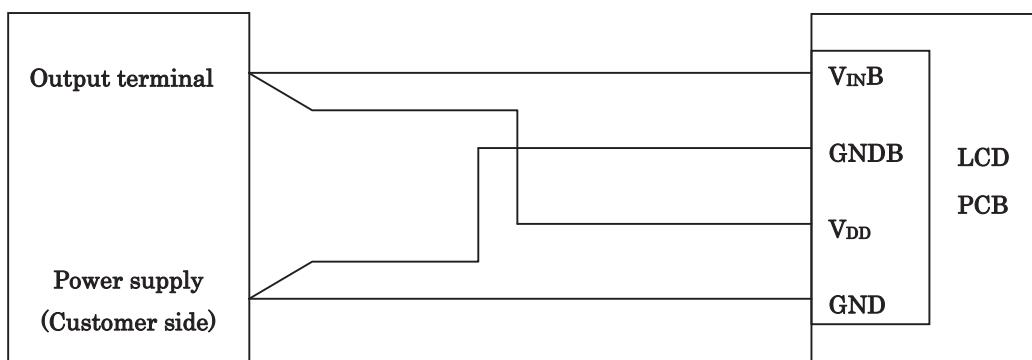

Wrong

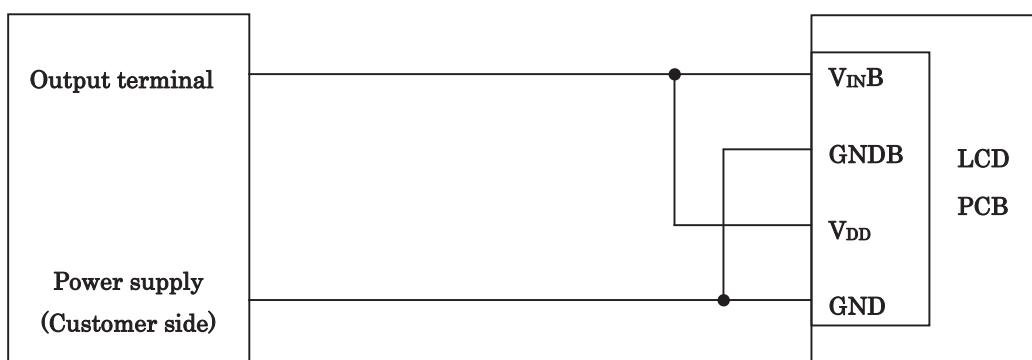

#### 8) VBR-T-IF characteristics

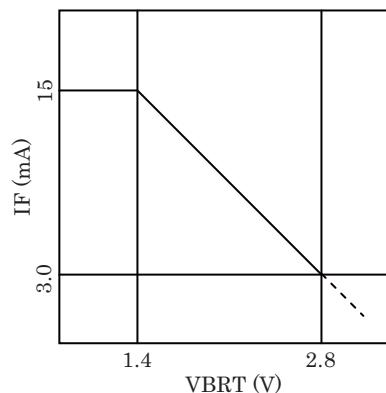

Spec No.	Part No.	Page
TQ3C-8EAF0-E1DEX53-00	TCG075VGLBE-H20	14

## 10. Design guidance for analog touch panel

10-1. Electrical (In customer's design, please remember the following considerations.)

- 1) Do not use the current regulated circuit.
- 2) Keep the current limit with top and bottom layer.  
(Please refer to "Electrical absolute maximum ratings" for details.)
- 3) Analog touch panel can not sense two points touching separately.
- 4) A contact resistance is appeared at the touch point between top and bottom layer.  
After this resistance has stable read of the touch panel position data.
- 5) Because noise of inverter or peripheral circuits may interfere signal of touch panel itself  
it is necessary to design carefully in advance to avoid these noise problem.

10-2. Software

- 1) Do the "User Calibration".
- 2) "User Calibration" may be needed with long term using.  
Include "User Calibration" menu in your software.
- 3) When drawing a line with a stylus, there may be a slight discontinuity when the stylus passes over a spacer-dot. If necessary, please provide a compensation feature within your software.

10-3. Mounting on display and housing bezel

- 1) Do not use an adhesive tape to bond it on the front of touch panel and hang it to the housing bezel.
- 2) This touch panel has an airtight but not watertight structure. Please not to use it for the applications requiring watertight or under the environments occurred condensation.  
If it is expected to be exposed to the environments that vapor, moisture or other liquids may seep inside a bezel, please be sure to take some measurements for drip-proof or waterproof by using sealing materials on the bezel.
- 3) In cases where the touch panel is bent or twisted, Newton's Rings may become visible. Please do not attach the touch panel to the LCD with a bend or twist and use similar precautions when mounting the assembled unit in the final product. Furthermore, design the final product so that the touch panel is not bent during use.

Spec No. TQ3C-8EAF0-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 15
-----------------------------------	-----------------------------	------------

## 11. Lot number identification

The lot number shall be indicated on the back of the backlight case of each LCD.

TCG075VGLBE-H20 - □□ - □□ - □ MADE IN □□□□□  
 ↓ ↓ ↓ ↓  
 1 2 3 4 5

No1. - No5. above indicate  
 1. Year code  
 2. Month code  
 3. Date  
 4. Version Number  
 5. Country of origin (Japan or China)

Year	2010	2011	2012	2013	2014	2015
Code	0	1	2	3	4	5

Month	Jan.	Feb.	Mar.	Apr.	May	Jun.
Code	1	2	3	4	5	6

Month	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Code	7	8	9	X	Y	Z

## 12. Warranty

### 12-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

### 12-2. Production warranty

Kyocera warrants its LCD's for a period of 12 months from the ship date. Kyocera shall, by mutual agreement, replace or re-work defective LCD's that are shown to be Kyocera's responsibility.

Spec No. TQ3C-8EAF0-E1DEX53-00	Part No. TCG075VGLBE-H20	Page 16
-----------------------------------	-----------------------------	------------

## 13. Precautions for use

### 13-1. Installation of the LCD

- 1) The LCD shall be installed so that there is no pressure on the LSI chips.
- 2) The LCD shall be installed flat, without twisting or bending.
- 3) Please design the housing window so that its edges are between the active area and the effective area of the LCD screen.  
Must maintain a gap between inside of bezel and touch panel to avoid malfunction or electrode damage of touch panel.
- 4) A transparent protection sheet is attached to the polarizer. Please remove the protection film slowly before use, paying attention to static electricity.

### 13-2. Static electricity

- 1) Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required.
- 2) Workers should use body grounding. Operator should wear ground straps.

### 13-3. LCD operation

- 1) The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.

### 13-4. Storage

- 1) The LCD shall be stored within the temperature and humidity limits specified.  
Store in a dark area, and protect the LCD from direct sunlight or fluorescent light.
- 2) Always store the LCD so that it is free from external pressure onto it.

### 13-5. Usage


- 1) DO NOT store in a high humidity environment for extended periods. Polarizer degradation bubbles, and/or peeling off of the polarizer may result.
- 2) Do not push or rub the touch panel's surface with hard to sharp objects such as knives, or the touch panel may be scratched.
- 3) When the touch panel is dirty, gently wipe the surface with a soft cloth, sometimes moistened by mild detergent or alcohol. If a hazardous chemical is dropped on the touch panel by mistake, wipe it off right away to prevent human contact.
- 4) Touch panel edges are sharp. Handle the touch panel with enough care to prevent cuts.
- 5) Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizer.
- 6) Do not pull the LED lead wires and do not bend the root of the wires. Housing should be designed to protect LED lead wires from external stress.
- 7) Do not disassemble LCD because it will result in damage.
- 8) This Kyocera LCD has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.
- 9) Please do not use solid-base image pattern for long hours because a temporary afterimage may appear. We recommend using screen saver etc. in cases where a solid-base image pattern must be used.
- 10) Liquid crystal may leak when the LCD is broken. Be careful not to let the fluid go into your eyes and mouth. In the case the fluid touches your body; rinse it off right away with water and soap.

Spec No.	Part No.	Page
TQ3C-8EAFO-E1DEX53-00	TCG075VGLBE-H20	17

## 14. Reliability test data

Test item	Test condition	Test time	Judgement	
High temp. atmosphere	80°C	240h	Display function : No defect Display quality : No defect Current consumption : No defect	
Low temp. atmosphere	-30°C	240h	Display function : No defect Display quality : No defect Current consumption : No defect	
High temp. humidity atmosphere	40°C 90% RH	240h	Display function : No defect Display quality : No defect Current consumption : No defect	
Temp. cycle	-30°C 0.5h R.T. 0.5h 80°C 0.5h	10cycles	Display function : No defect Display quality : No defect Current consumption : No defect	
High temp. operation	70°C	500h	Display function : No defect Display quality : No defect Current consumption : No defect	
Point Activation 5)	Silicon rubber, Tip : TBD Hardness TBD Hitting force TBD N Hitting speed 5 time/s	TBD	Touch panel function : No defect Terminal resistance : No defect Linearity : No defect Actuation Force : No defect  No appearance defect which affects touch panel function. 6)	
Sliding 5)	Polyacetal resin, Tip : TBD Load TBD N Input length TBD mm Input speed TBD mm/s	TBD 7)	Touch panel function : No defect Terminal resistance : No defect Linearity : No defect Actuation Force : No defect  No appearance defect which affects touch panel function. 6)	

- 1) Each test item uses a test LCD only once. The tested LCD is not used in any other tests.
- 2) The LCD is tested in circumstances in which there is no condensation.
- 3) The reliability test is not an out-going inspection.  
The reliability test is conducted only to examine the LCD's capability.
- 4) The result of the reliability test is for your reference purpose only.
- 5) Test in active area.
- 6) Dents, blurs and marks on surface film: neglected.
- 7) 10mm sliding (back and forth) counts as 2 times.
- 8) Temp. cycle test (Heat shock included): the LCD shall be tested after leaving it stabilize at room temperature for 2 hours after the last cycle.
- 9) An operational test was performed after the following conditions. First, the touch panel was left for a certain time under 5V voltages applied (without touch), Then it was left at room temperature (No VDC applied) for 2 hours.



DETAIL A (NTS)

Note. (注記) 1. Connector CN1:MSA-9681S-40A-GF (IRISO)  
 (コネクタ) 2. The information of LCD is displayed starting at the upper left hand corner, moving right then down to the lower right hand corner.  
 (LCD) 3. Tolerance without indication : ±0.5  
 (指示無き公差)

Note. (注記) 11. Connector CN1: IMSA-9681S-40A-GF (IRISO)

3 The Information of LCD is displayed starting (ヨネタニ)

3. The remaining oil is sprayed starting from the corner, moving right then down to the lower


LCDにおいて、画像データの表示は左上コーナーから始まり、右へ進み

3. Oracle will do migration: ±0.3  
指示無き差


卷之三



DETAIL B (5:1)



DB

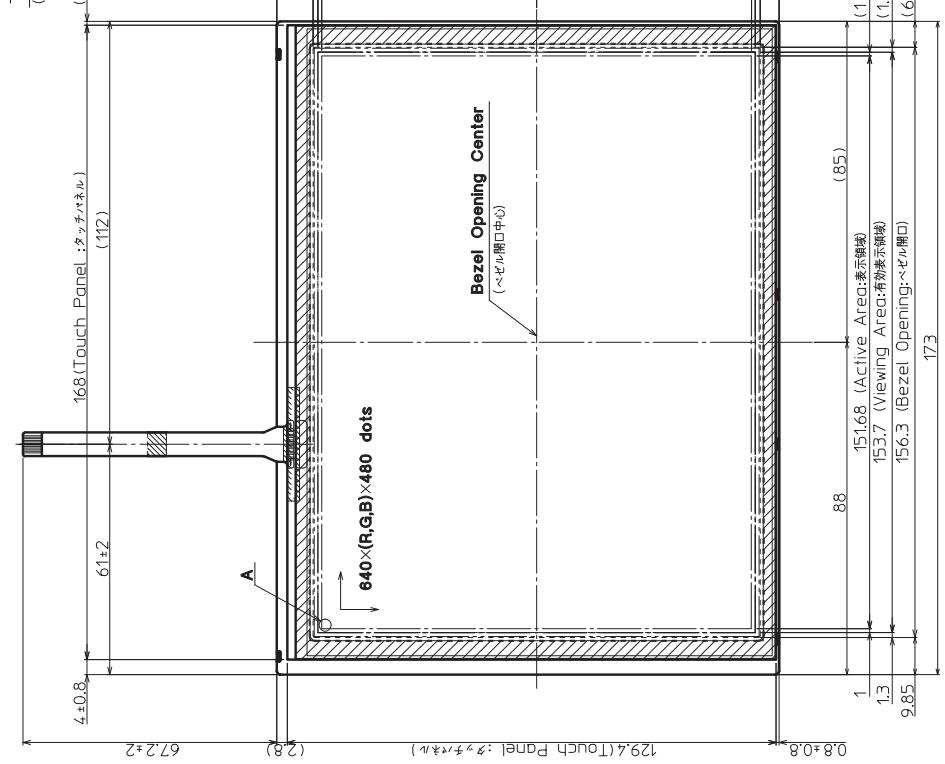


**Bezel Opening Center**  
(ベゼル開口中心)

This technical drawing illustrates the dimensions and key features of a Touch Panel assembly. The overall width is 129.4 (Touch Panel: 127.2±0.8) mm. The active area is defined by a 640x(R,G,B)x480 dots resolution. The bezel opening center is located at 113.76 (ACTIVE AREA: 表示領域) mm from the left edge. The viewing area is indicated by a dashed rectangle. The bezel opening is 156.3 (Bezel Opening: ベゼル開口) mm wide and 88 mm high. The bezel thickness is 1.3 mm. The terminal surface (端子面) is labeled as 168 (Touch Panel: タッチパネル) mm. The total height of the panel is 173 mm. The outer dimensions are 161±2 mm (width) and 112 (height). The dimension of the outer circumference is 1.22±0.1 mm.

Dimensions and Labels:

- Width: 129.4 (Touch Panel: 127.2±0.8) mm
- Height: 173 mm
- Bezel Opening Center: 113.76 (ACTIVE AREA: 表示領域) mm
- Viewing Area: 151.68 (Active Area: 表示領域)
- Bezel Opening: 156.3 (Bezel Opening: ベゼル開口)
- Bezel Thickness: 1.3 mm
- Terminal Surface (端子面): 168 (Touch Panel: タッチパネル) mm
- Outer Circumference Dimension: 1.22±0.1 mm
- Overall Width: 161±2 mm
- Overall Height: 112 mm
- Resolution: 640x(R,G,B)x480 dots

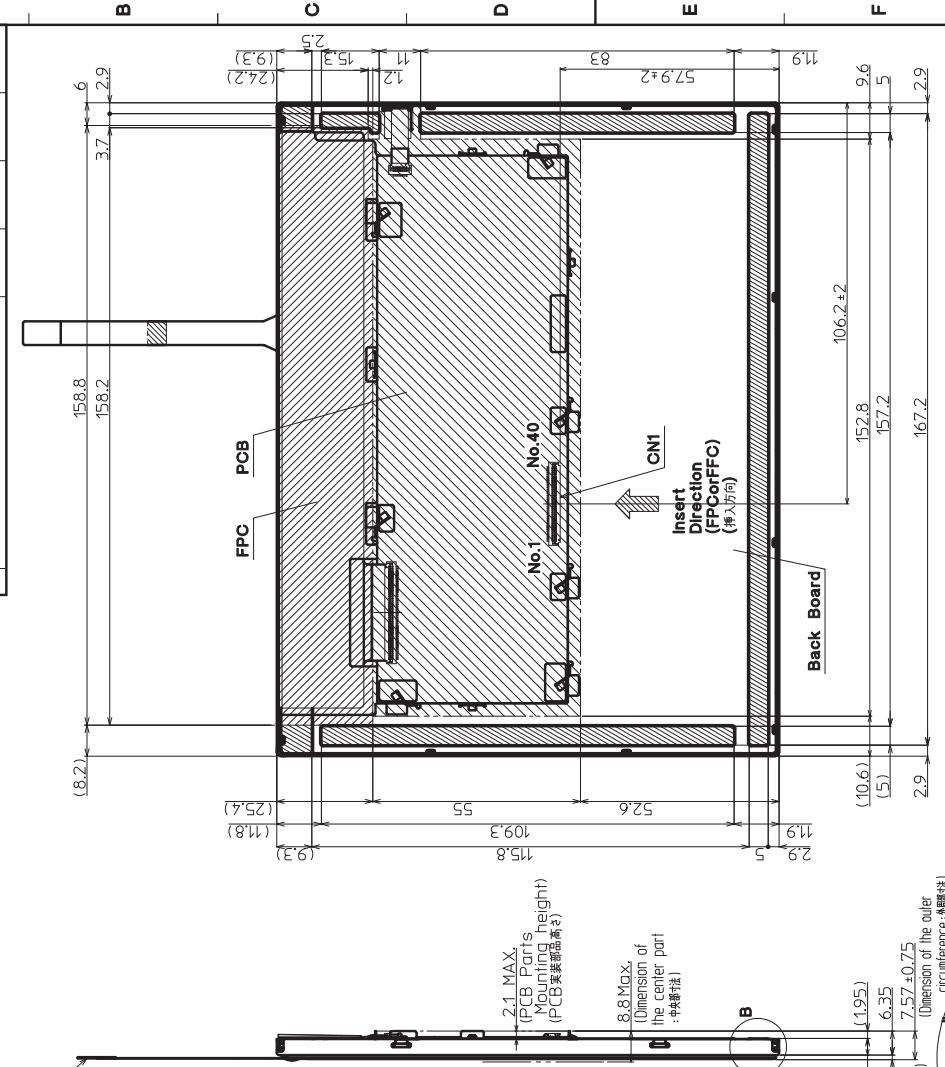

DETAIL B (5:1)



：（裏面板からの高さ0.15mm）

 : Projected part is 2.1mm height from Back Board.  
(裏面板金からの高さ2.1mm)

 : Projected part is 15mm height from Back Board.  
(裏面板金からの高さ 15mm)

ESTATE PLANNING


Outline Dimensions Drawing No. 121A80

11




参考(for Reference)

**押さえつけ可能領域**  
(Pressure may be applied in this area.)  
  
**押さえつけ不可能領域**  
(No "point" over pressure is allowed.)  

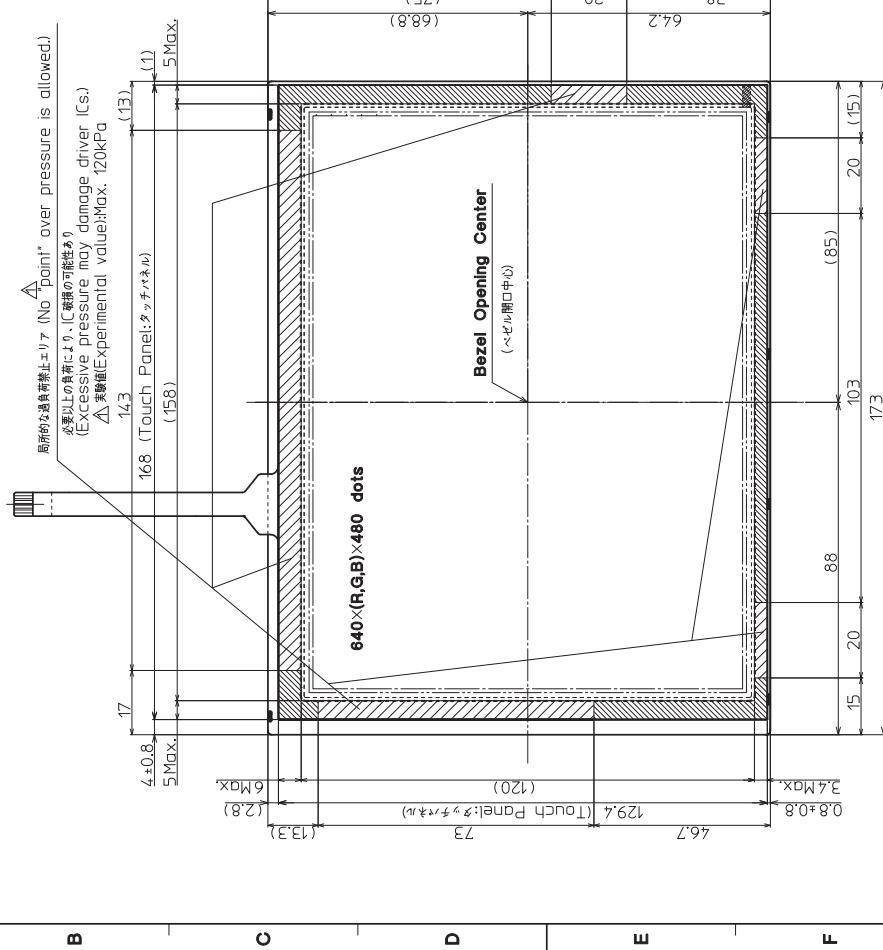※取り付け例(Installation Guidance)

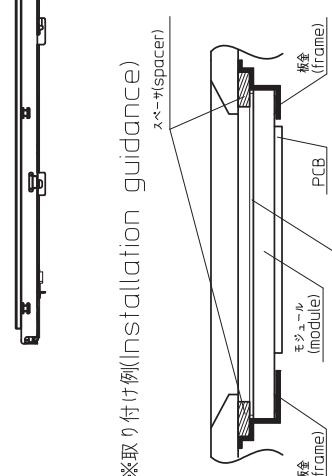

## 取り付け方法 (Installation of the LCD)

ケースにモニターをはめ込む(X/Y面)裏面から2方向で固定する事可能。  
[The LCD module shall be held in the X/Y direction by the housing, and in the Z direction using a backboard.]

表面取り付け条件  
(Installation conditions (Front side))

1.PCBへの接觸無きこと  
(1. Do not allow any foreign mater

1.FPCへの接着無きこと  
(1. Do not allow any foreign material to contact the PCB.)  
2.FPCエリア押さえ不可  
(2.Do not apply pressure to the area of the FPC)

3. PCB側の板金部を押さないで  
 (3). Do not apply pressure on the projected metal part of  
 the PCB.

4. モジュールを折るときにモジュールを曲げないで  
 (4). Do not allow the LCD module to bend or twist.)

5.広い範囲で均一に押さえることが望ましい  
(5. Support the LCD with uniform pressure over as wide an area as possible.)

主記 (Note)  
指定外差 (Tolerance without indication) : ±0.5

**G** (2. Do not use any part of the FPC area to hold the LCD module in place)

(2. Do not use any part of the FPC area to hold the LCD module in place)

(3) Do not apply pressure on the projected metal part of the PCB.

(4) Do not allow the LCD module to bend or twist.)

5.広い範囲で均一に押さえることが望ましい  
(5. Support the LCD with uniform pressure over as wide an area as possible.)

主記 (Note)  
指定外差 (Tolerance without indication) : ±0.5

Title	TCG075YgalB*	with T/P		 KYOCERA	Year-Month-Day	Size
Module	Installation		Drawing No.	121A5098300-1	'08.05.19	2

Material	Quantity	Treatment	Approved	Checked	Checked	Drawn	Scale
	件數	處理	'08.05.21	'08.05.21	'08.05.21	富士山	1:1(NTS)
備考	備註	RoHS	'08.05.21 回部				

Spec No.	TQ3C-8EAF0-E2DEX53-00
Date	April 8, 2010

## **KYOCERA INSPECTION STANDARD**

**TYPE : TCG075VGLBE-H20**

KYOCERA CORPORATION  
KAGOSHIMA HAYATO PLANT  
LCD DIVISION

Original Issue Date	Designed by : Engineering dept.			Confirmed by : QA dept.	
	Prepared	Checked	Approved	Checked	Approved
April 8, 2010	<i>Y. Ikeda</i>	<i>Y. Yamagishi</i>	<i>M. Fujitani</i>	<i>J. Sakaguchi</i>	<i>K. Arai</i>





Spec No. TQ3C-8EAF0-E2DEX53-00	Part No. TCG075VGLBE-H20	Page -
-----------------------------------	-----------------------------	-----------

### Revision record

Date	Designed by : Engineering dept.			Confirmed by : QA dept.	
	Prepared	Checked	Approved	Checked	Approved
Rev.No.	Date	Page	Descriptions		

**Visuals specification**





## 1) Note

Note											
General	<p>1. Customer identified anomalies not defined within this inspection standard shall be reviewed by Kyocera, and an additional standard shall be determined by mutual consent.</p> <p>2. This inspection standard about the image quality shall be applied to any defect within the effective viewing area and shall not be applicable to outside of the area.</p> <p>3. Inspection conditions</p> <table> <tr> <td>Luminance</td><td>: 500 Lux min.</td></tr> <tr> <td>Inspection distance</td><td>: 300 mm.</td></tr> <tr> <td>Temperature</td><td>: 25 ± 5°C</td></tr> <tr> <td>Direction</td><td>: Directly above</td></tr> </table>			Luminance	: 500 Lux min.	Inspection distance	: 300 mm.	Temperature	: 25 ± 5°C	Direction	: Directly above
Luminance	: 500 Lux min.										
Inspection distance	: 300 mm.										
Temperature	: 25 ± 5°C										
Direction	: Directly above										
Definition of inspection item	Dot defect	Bright dot defect	The dot is constantly “on” when power applied to the LCD, even when all “Black” data sent to the screen. Inspection tool: 5% Transparency neutral density filter. Count dot: If the dot is visible through the filter. Don’t count dot: If the dot is not visible through the filter.  								
	Black dot defect		The dot is constantly “off” when power applied to the LCD, even when all “White” data sent to the screen.								
	Adjacent dot		Adjacent dot defect is defined as two or more bright dot defects or black dot defects.  								
External inspection	Bubble, Scratch, Foreign particle (Polarizer, Cell, Backlight)		Visible operating (all pixels “Black” or “White”) and non operating.								
	Appearance inspection		Does not satisfy the value at the spec.								
Others	LED wire		Damaged to the LED wires connector, pin, functional failure or appearance failure.								
Definition of size	<p>Definition of circle size</p>  $d = (a + b)/2$		Definition of linear size								
											

Spec No. TQ3C-8EAF0-E2DEX53-00	Part No. TCG075VGLBE-H20	Page 2
-----------------------------------	-----------------------------	-----------

## 2) Standard

Classification		Inspection item	Judgement standard									
Defect (in LCD glass)	Dot defect	Bright dot defect	Acceptable number : 4	Bright dot spacing : 5 mm or more								
		Black dot defect	Acceptable number : 5	Bright dot spacing : 5 mm or more								
		2 dot join	Acceptable number : 2	Bright dot defect								
	Others	Black dot defect	Acceptable number : 3	3 or more dots join								
		Total dot defects	Acceptable number : 5 Max									
		White dot, Dark dot (Circle)	<table border="1"> <thead> <tr> <th>Size (mm)</th> <th>Acceptable number</th> </tr> </thead> <tbody> <tr> <td><math>d \leq 0.2</math></td><td>(Neglected)</td></tr> <tr> <td><math>0.2 &lt; d \leq 0.4</math></td><td>5</td></tr> <tr> <td><math>0.4 &lt; d \leq 0.5</math></td><td>3</td></tr> <tr> <td><math>0.5 &lt; d</math></td><td>0</td></tr> </tbody> </table>		Size (mm)	Acceptable number	$d \leq 0.2$	(Neglected)	$0.2 < d \leq 0.4$	5	$0.4 < d \leq 0.5$	3
Size (mm)	Acceptable number											
$d \leq 0.2$	(Neglected)											
$0.2 < d \leq 0.4$	5											
$0.4 < d \leq 0.5$	3											
$0.5 < d$	0											
External inspection (Defect on Polarizer or between Polarizer and LCD glass)	Polarizer (Scratch)	Polarizer (Scratch)	Width (mm)	Length (mm)								
			$W \leq 0.1$	—								
			$0.1 < W \leq 0.3$	$L \leq 5.0$								
			$5.0 < L$	0								
			$0.3 < W$	—								
	Polarizer (Bubble)	Polarizer (Bubble)	Size (mm)	Acceptable number								
			$d \leq 0.2$	(Neglected)								
			$0.2 < d \leq 0.3$	5								
			$0.3 < d \leq 0.5$	3								
			$0.5 < d$	0								
	Foreign particle (Circular shape)	Foreign particle (Circular shape)	Size (mm)	Acceptable number								
			$d \leq 0.2$	(Neglected)								
			$0.2 < d \leq 0.4$	5								
			$0.4 < d \leq 0.5$	3								
			$0.5 < d$	0								
	Foreign particle (Linear shape) Scratch	Foreign particle (Linear shape) Scratch	Width (mm)	Length (mm)								
			$W \leq 0.03$	—								
			$0.03 < W \leq 0.1$	$L \leq 2.0$								
			$2.0 < L \leq 4.0$	3								
			$4.0 < L$	0								
			$0.1 < W$	—								
				(According to circular shape)								

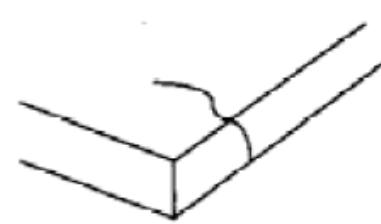Inspection item	Judgement standard						
Scratch, Foreign particle (Touch screen portion)	( W = Width, L = Length, D = Diameter = (major axis + minor axis)/ 2)						
	Item	Width(mm)	Length(mm)	Acceptable number			
	Scratch	$d \leq 0.03$	$L \leq 20$	Neglected			
		$0.03 < d \leq 0.05$	$L \leq 10$	2pces within $\varphi 20\text{mm}$			
		$0.05 < d \leq 0.08$	$L \leq 6$	2pces within $\varphi 20\text{mm}$			
		$0.08 < d \leq 0.1$	$L \leq 4$	1pces within $\varphi 30\text{mm}$			
	Foreign (line like)	$W \leq 0.05$	Neglected	Neglected			
		$0.05 < W \leq 0.1$	$L \leq 5$	2pces within $\phi 30\text{mm}$			
	Foreign (circle like)	$D \leq 0.2$		Neglected			
		$0.2 < D \leq 0.3$		2pces within $\phi 30\text{mm}$			
	Above are applied to the visible area.						
	Unless there are foreign particle and damage affected seriously to the electrical performance out of the active area, we approve of this product.						
Glass crack (Touch screen portion)	Item	Size (mm)					
	Conner crack		X	$\leq 3$			
			Y	$\leq 3$			
			Z	$< t$			
	Crack in other area than in corner		X	$\leq 5$			
			Y	$\leq 1.5$			
			Z	$< t$			
	Progressive crack						
	0 pcs (NG even 1pcs)						
	Above are applied to the visible area.						
	Unless there are foreign particle and damage affected seriously to the electrical performance out of the active area, we approve of this product.						
Newton's ring	All Newton Rings in the center of the screen must be rejected. Border around the screen are permitted.						
			NG				
			OK				