



Date: 2005/11/28

Product Functional Specification

14.1 inch XGA Color TFT LCD Module

Model name : B141XG09 V4

Toshiba model name : G33C00038110

() Preliminary Specification
(u) Final Specification

NOTICE of RECEIPT

We accepted this specification. **OME Operations, TOSHIBA Corp.**

| | Eng. | Senr. Eng. | Senr. Mgr. |
|-------------------------|------|------------|------------|
| Purchasing dept. | | | |
| PC Hardware dept. | | | |

Note: This Specification is subject to change without notice.

Contents

| | |
|---|-----------|
| 1.0 Handling Precautions | 4 |
| 2.0 General Description..... | 5 |
| 2.1 Display Characteristics..... | 5 |
| 2.2 Functional Block Diagram | 6 |
| 3.0 Absolute Maximum Ratings | 7 |
| 3.1 Mechanical Ratings..... | 8 |
| 4.0 Optical Characteristics..... | 12 |
| 5.0 Signal Interface..... | 17 |
| 5.1 Connectors..... | 17 |
| 5.2 Signal Pin..... | 17 |
| 5.3 Signal Description | 18 |
| 5.4 Signal Electrical Characteristics | 19 |
| 5.5 Signal for Lamp connector | 19 |
| 6.0 Pixel Format Image..... | 20 |
| 7.0 Parameter guide line for CCFL Inverter | 20 |
| 8.0 Interface Timings..... | 21 |
| 8.1 Timing Characteristics..... | 21 |
| 8.2 Timing Definition | 22 |
| 9.0 Power Consumption | 23 |
| 10. Power ON/OFF Sequence | 24 |
| 11.0 Reliability /Safety Requirement..... | 25 |
| 11.1 Reliability Test Conditions..... | 25 |
| 11.2 Safety..... | 25 |
| 11.3 Others | 25 |
| 12.0 Packing Dimension..... | 26 |
| 12.1 Packing method | 26 |
| 12.2 Packing Specification..... | 27 |
| 12.3 Package Label | 27 |
| 12.4 Location of Package Label | 27 |
| 12.5 Panel Code Label on LCD | 27 |
| 12.6 Location of Panel Label | 28 |
| 13.0 Mechanical Characteristics..... | 29 |
| 13.1 LCM Outline dimension (Front View)..... | 29 |
| 13.2 LCM Outline Dimension (Rear View)..... | 30 |
| 13.3 Screw Hole Depth and Center Position..... | 31 |
| 14.0 EDID..... | 32 |

II Record of Revision

| Version and Date | Page | Old description | New Description | Remark |
|------------------|------|-------------------------|--|--------|
| V1. 2005/11/23 | All | First Release | NA | |
| V2. 2005/12/28 | 12 | Brightness 160nit (min) | Brightness 175nit (min) | |
| | 12 | | Add CR Value: 350 (typ) | |
| | 12 | Cross Talk: 4.0% (max) | Cross Talk: 2.0% (max) | |
| | 12 | | Add CR Variation (13 points): 1.6 (max) | |

1.0 Handling Precautions

- 1) Do not press or scratch the surface harder than a HB pencil lead because the polarizers are very fragile and could be easily damaged.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water droplets or oil immediately. Long contact with the droplets may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Protect the module from static electricity and insure proper grounding when handling. Static electricity may cause damage to the CMOS Gate Array IC.
- 7) Do not disassemble the module.
- 8) Do not press the reflector sheet at the back of the module.
- 9) Avoid damaging the TFT module. Do not press the center of the CCFL Reflector when it was taken out from the packing container. Instead, press at the edge of the CCFL Reflector softly.
- 10) Do not rotate or tilt the signal interface connector of the TFT module when you insert or remove other connector into the signal interface connector.
- 11) Do not twist or bend the TFT module when installation of the TFT module into an enclosure (Notebook PC Bezel, for example). It should be taken into consideration that no bending/twisting forces are applied to the TFT module from outside when designing the enclosure. Otherwise the TFT module may be damaged.
- 12) Cold cathode fluorescent lamp in LCD contains a small amount of mercury. Please follow local regulations for disposal.
- 13) The LCD module contains a small amount of material that has no flammability grade, so it should be supplied by power complied with requirements of limited power source (2.11, IEC60950 or UL1950).
- 14) The CCFL in the LCD module is supplied with Limited Current Circuit (2.4, IEC60950 or UL1950). Do not connect the CCFL in Hazardous Voltage Circuit.

2.0 General Description

This specification applies to the 14.1 inch Color TFT/LCD Module B141XG09 V4

This module is designed for a display unit of notebook style personal computer.

The screen format is intended to support the XGA (1024(H) x 768(V)) screen and 262k colors (RGB 6-bits data driver).

All input signals are LVDS interface compatible.

This module does not contain an inverter card for backlight.


2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

| ITEMS | Unit | SPECIFICATIONS |
|--|----------------------|---|
| Screen Diagonal | [mm] | 357(14.1") |
| Active Area | [mm] | 285.7(H) x 214.3(V) |
| Pixels H x V | | 1024(x3) x 768 |
| Pixel Pitch | [mm] | 0.279(per one triad) x 0.279 |
| Pixel Arrangement | | R.G.B. Vertical Stripe |
| Display Mode | | Normally White |
| Typical White Luminance(CCFL=6.0mA) | [cd/m ²] | 200 Typ.(5 points average) |
| Contrast Ratio | | 300:1 Min. |
| Response Time | [msec] | 25 Typ. |
| Nominal Input Voltage VDD | [Volt] | +3.3 Typ. |
| Typical Power Consumption (VDD line + VCFL line) | [Watt] | 5.3 Watt (w/o Inverter, All black pattern)@LCM circuit 1.4 Watt(typ.),B/L input 3.9 Watt(typ.) |
| Weight | [Grams] | 420g Max. |
| Physical Size | [mm] | 299(W) x 228(H) x 5.5(D) Max. |
| Electrical Interface | | R/G/B Data, 3 Sync, Signals, Clock (4 pairs LVDS) |
| Surface Treatment | | Anti-glare, Haze 25, Hardness 3H |
| Support Color | | Native 262K colors (RGB 6-bit data driver) |
| Temperature Range Operating Storage (Shipping) | [°C] [°C] | 0 to +50 -20 to +60 |

2.2 Functional Block Diagram

The following diagram shows the functional block of the 14.1 inches Color TFT/LCD Module:

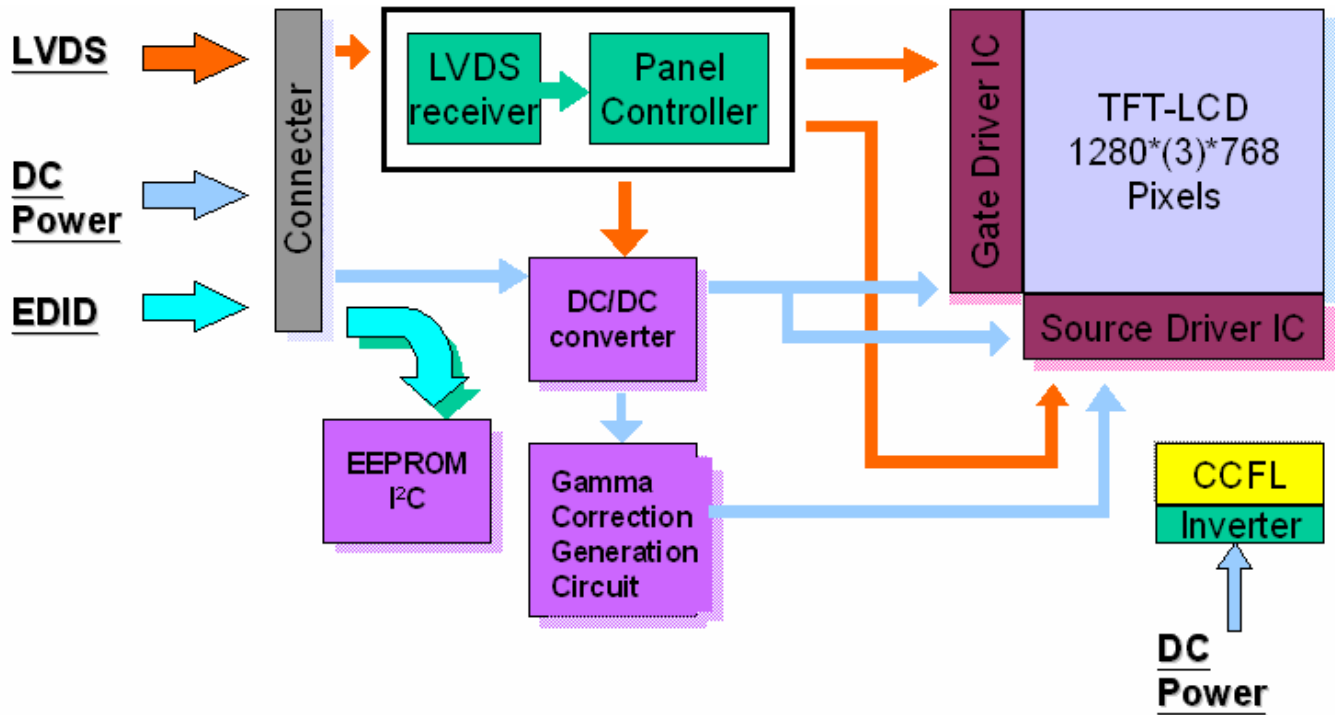

3.0 Absolute Maximum Ratings


Absolute maximum ratings of the module are as following:

| Item | Symbol | Min | Max | Unit | Conditions |
|-------------------------|--------|------|-------------|----------|----------------|
| Logic/LCD Drive Voltage | VDD | -0.3 | +4.0 | [Volt] | |
| Input Voltage of Signal | Vin | -0.3 | VDD+0.3 | [Volt] | |
| CCFL Current | ICFL | - | 6.5 | [mA] rms | |
| CCFL Ignition Voltage | Vs | - | 1160(25°C) | Vrms | Note 1 |
| Operating Temperature | TOP | 0 | +50 | [°C] | Note 2 |
| Operating Humidity | HOP | 5 | 95 | [%RH] | Note 2 |
| Storage Temperature | TST | -20 | +60 | [°C] | Note 2 |
| Storage Humidity | HST | 5 | 95 | [%RH] | Note 2 |
| Vibration | | | 1.5 ,10-500 | [G Hz] | |
| Shock | | | 240 , 2 | [G ms] | Half sine wave |


Note 1 : Duration = 50msec

Note 2 : Maximum Wet-Bulb should be 39°C and No condensation.

Wet bulb temperature chart

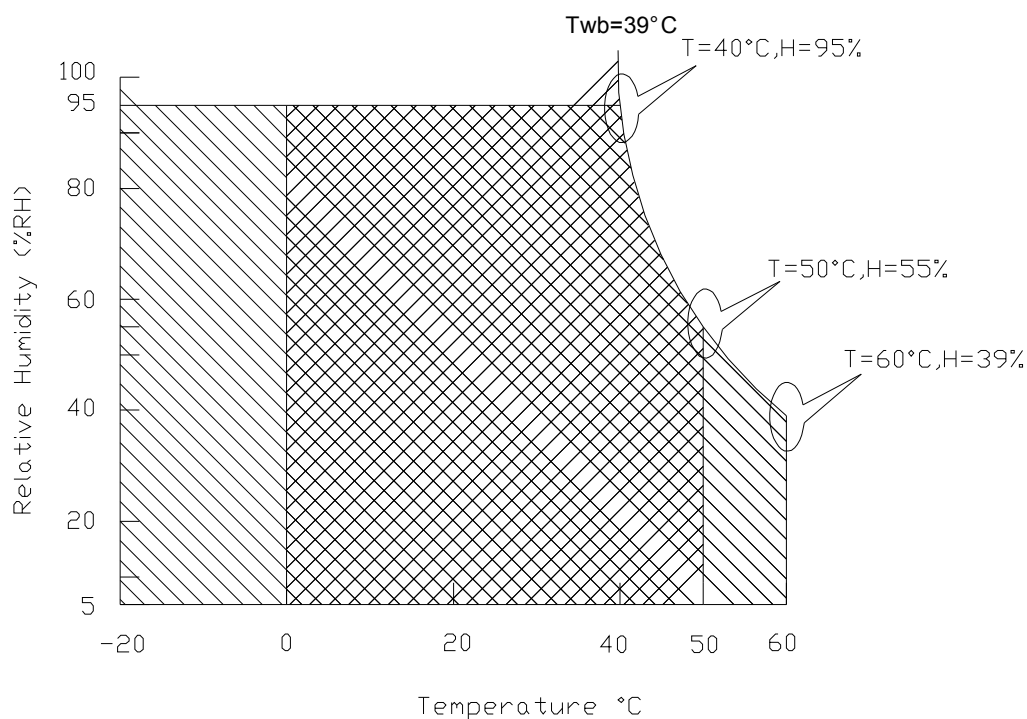


Operating Range 

Storage Range  + 

3.1 Mechanical Ratings

LCD shall have no failure in the following reliability tests.


| Test Item | Test Conditions | | Note |
|--|---|--|--|
| Mechanical Vibration | Frequency Range 10 - 500 Hz, 14.7m/s ² (1.5G) constant, 0.5Hrs each axis (X, Y, Z direction) | | Non Operation |
| Strength of FL Cable | Strength of rotation force | Cable : No disconnection of cable to the 5 trial of 360 degree rotation. See a bended state of cable. | Non Operation  |
| | | Connector : No disconnection of cable to 10 trial of 180 degree rotation. See a bended state of cable. | |
| | Lead pull test | Soldering portion : 29.4N (3.0 kgf), 10 minutes | |
| | | Connector : 14.7N (1.5kgf), 1 second | |
| Connector tension test | Input connector : With 50 times of connector trial there must be no damage to the shape and functionaly. | | Non Operation |
| | Back light connector : With 50 times of connector trial there must be no damage to the shape and functionaly. | | |
| Assured torque value at side-mout screw hole | M2 : Max 2.5 kgf·cm | | Non Operation |
| Mechanical Shock | 240G, Pulse width 2 ms, Half-sine Wave, ±X, ±Y, ±Z direction | | Non Operation |
| Mechanical Shock | 240G, Pulse width 2 ms, Sine Wave, ±X, ±Y, ±Z direction | | Non Operation |
| LCD fix condition -> See Note (2) | | | |

Note (1) Pushing points of Pressure Resistance

(1) The compression condition of front side

(a) Compression point : 12 points (refer to Fig 1-1)

(b) Compression condition: 20kgf, 3 sec, Tool diameter: 16 mm in diameter (refer to Fig 1-3)

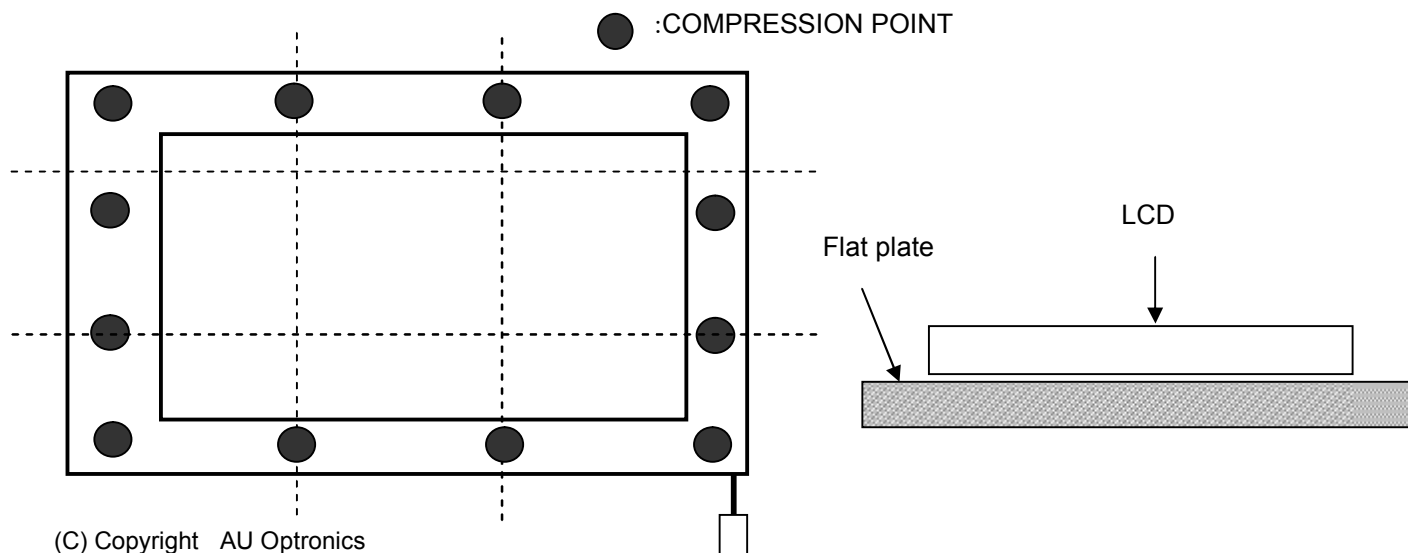

(C) Copyright AU Optonics



Dec., 2002 All Rights Reserved.

No Reproduction and Redistribution Allowed.

B141XG09 V4

(2) The compression condition of rear side


- (a) Compression point : 21 points (refer to Fig 1-2)
- (b) Compression condition : 30kgf, 3 sec, Tool radius: 30 mm in diameter (refer to Fig 1-3)

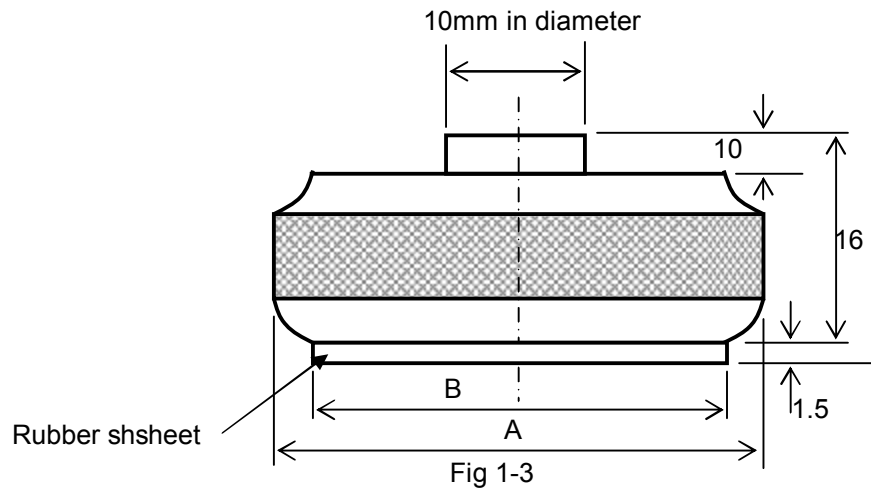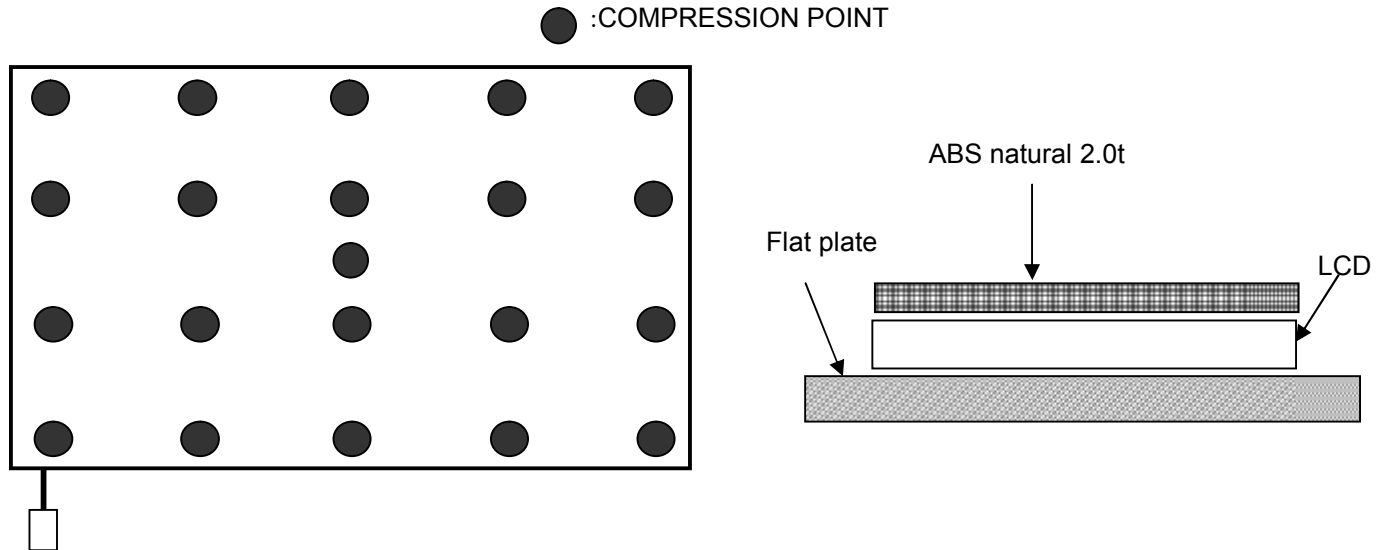

(3) Dimension of the compression jig

- (a) compression jig for front side
 - A = 16 mm in diameter
 - B = 16 mm in diameter
- (b) compression jig for rear side
 - A = 30 mm in diameter
 - B = 28 mm in diameter

Note (2) LCD fixing condition for z direction

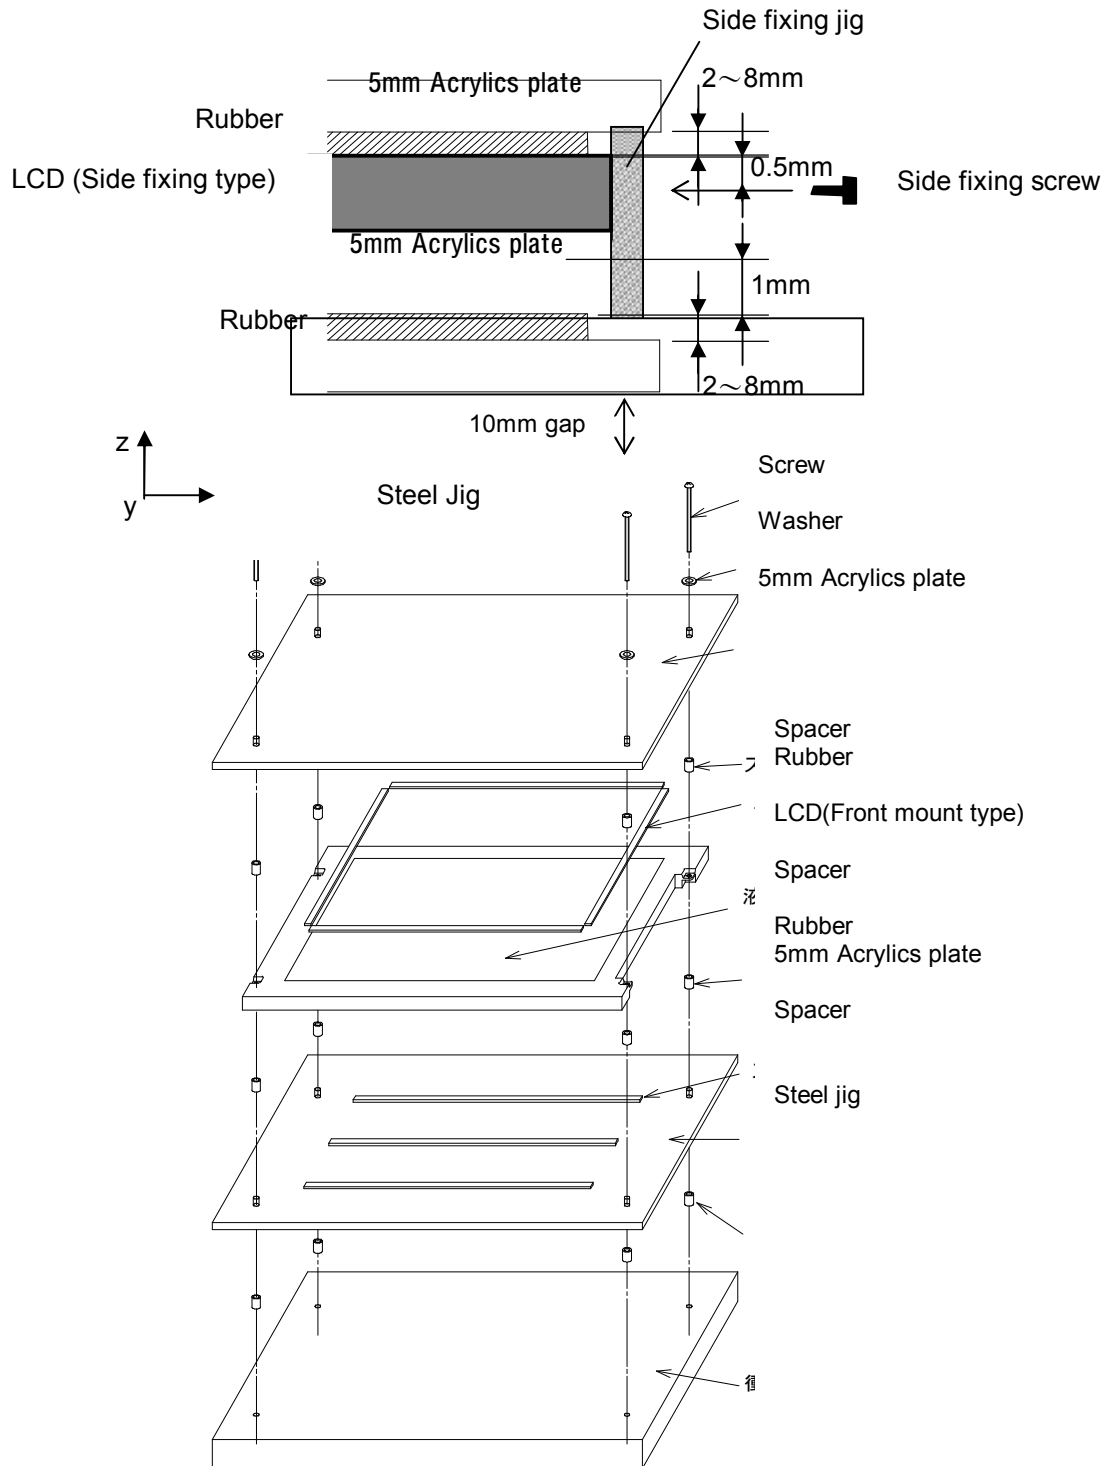


Note (3) Spec points of strength of FL cable

Strength of rotation force


1) 360deg rotation / 5 times

2) 180deg rotation / 10 times

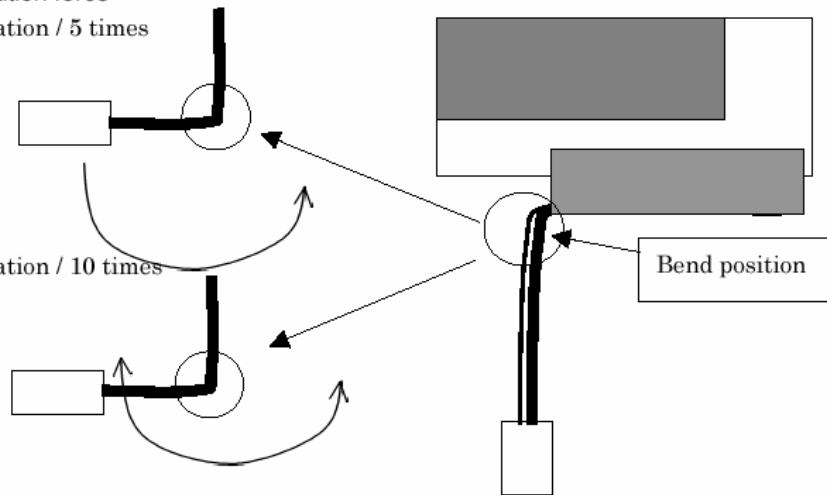


Strength of pull force

3) Soldering portion (Joint portion between lamp terminal and cable)

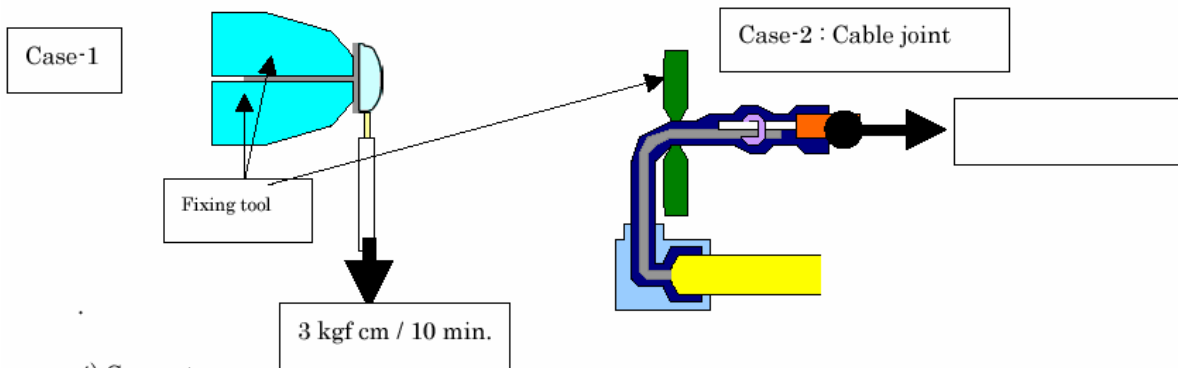

4) Connector

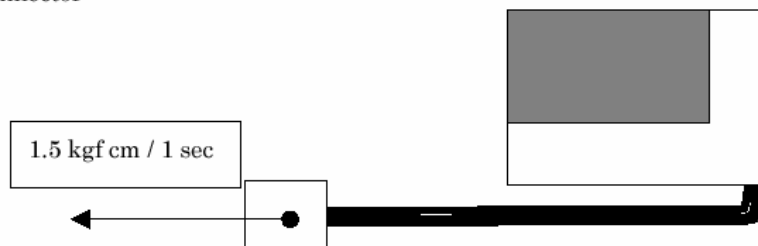


4.0 Optical Characteristics

The optical characteristics are measured under stable conditions as follows under 25°C condition:

| Item | Unit | Conditions | Min. | Typ. | Max. | Note |
|---|----------------------|---|----------|--------|--------|---------|
| Viewing Angle | [degree] [degree] | Horizontal (Right) CR = 10 (Left) | 40 40 | - - | - - | 3,7 |
| CR: Contrast Ratio | [degree] [degree] | Vertical (Upper) CR = 10 (Lower) | 10 30 | - - | - - | |
| Uniformity | | 5 Points | | | 1.2 | 2 |
| Uniformity | | 13 Points | | | 1.5 | |
| Contrast ratio | | | 300 | 350 | - | 6 |
| Response Time | [msec] | Rising | - | 10 | 15 | 5 |
| | [msec] | Falling | - | 15 | 20 | |
| Color / Chromaticity Coordinates (CIE 1931) | | Red x | 0.550 | 0.580 | 0.610 | 3,7 |
| | | Red y | 0.310 | 0.340 | 0.370 | |
| | | Green x | 0.280 | 0.310 | 0.340 | |
| | | Green y | 0.520 | 0.550 | 0.580 | |
| | | Blue x | 0.120 | 0.150 | 0.180 | |
| | | Blue y | 0.100 | 0.130 | 0.160 | |
| | | White x | 0.283 | 0.313 | 0.343 | |
| | | White y | 0.299 | 0.329 | 0.359 | |
| White Luminance CCFL 6.0mA | [cd/m ²] | 5 points average | 175 | 200 | - | 1,3,4 |
| Cross talk | % | $\theta=0^\circ$, $\Phi=0^\circ$ Viewing Normal Angle | | | 2.0 | 3,8 |
| CR Variation | | 13 points | | | 1.6 | 1,2,3,6 |

Note 1: 5 & 13 points position (Display area: 285.7mm x 214.3mm)

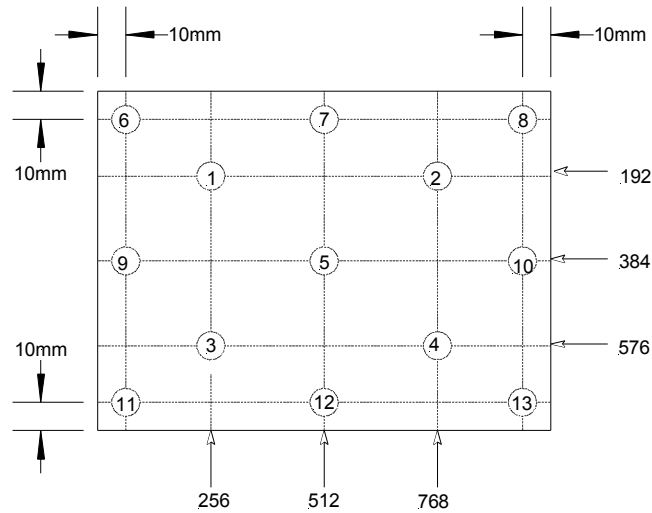

Note 2: Definition of white uniformity:

White uniformity is defined as the following with five/thirteen measurements (1~13) at Figure in Note (1). .


$$\delta_{w5} = \frac{\text{Maximum Brightness of five (1,2,3,4,5) points}}{\text{Minimum Brightness of five (1,2,3,4,5) points}}$$

$$\delta_{w13} = \frac{\text{Maximum Brightness of thirteen points}}{\text{Minimum Brightness of thirteen points}}$$

$$\delta_{CR13} = \frac{\text{Maximum CR of thirteen points}}{\text{Minimum CR of thirteen points}}$$

Note 3: Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room.

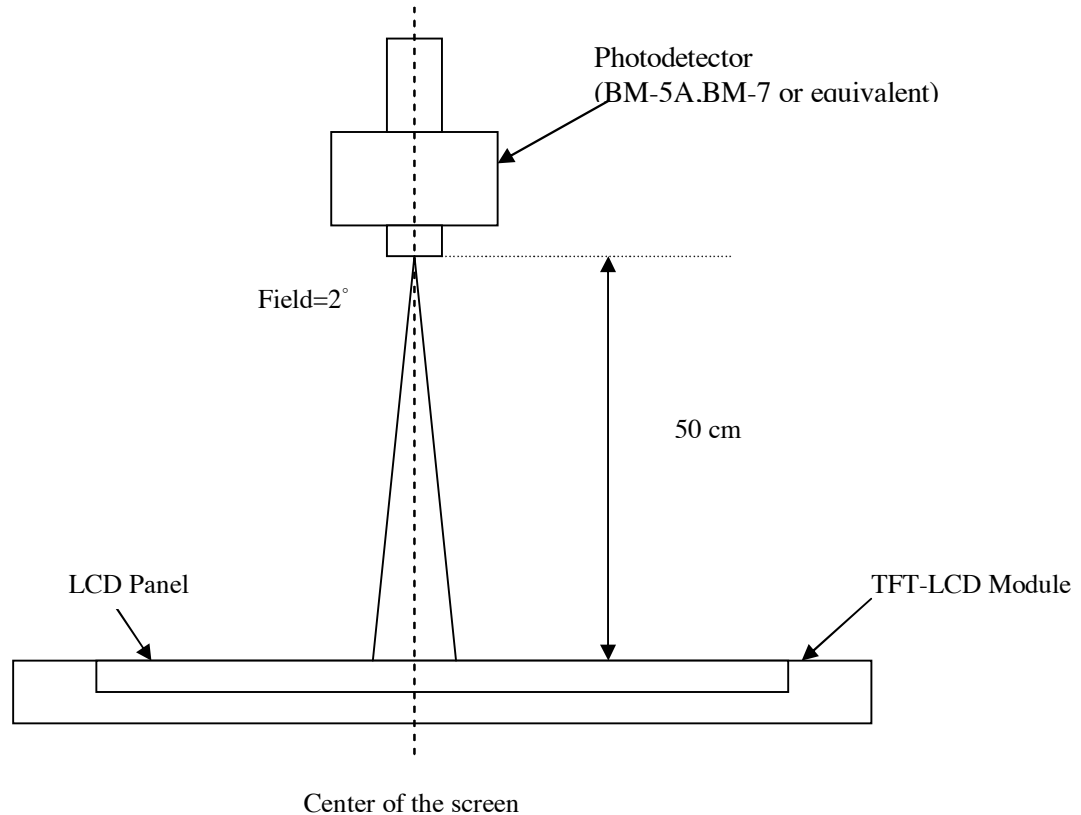


Note 4: Definition of Average Luminance of White (Y_L):

Measure the luminance of gray level 63 at 5 points , $Y_L = [L(1) + L(2) + L(3) + L(4) + L(5)] / 5$

$L(x)$ is corresponding to the luminance of the point X at Figure in Note (1).

Note 5: Definition of response time:

The output signals of BM-7 or equivalent are measured when the input signals are changed from “Black” to “White” (falling time) and from “White” to “Black” (rising time), respectively. The response time interval between the 10% and 90% of amplitudes. Refer to figure as below.

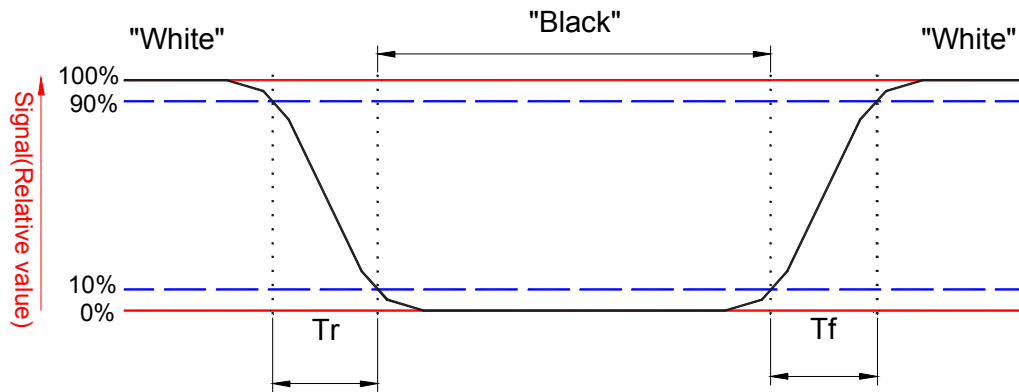


Note 6. Definition of contrast ratio:

Contrast ratio is calculated with the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$

Note 7. Definition of viewing angle

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (Φ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

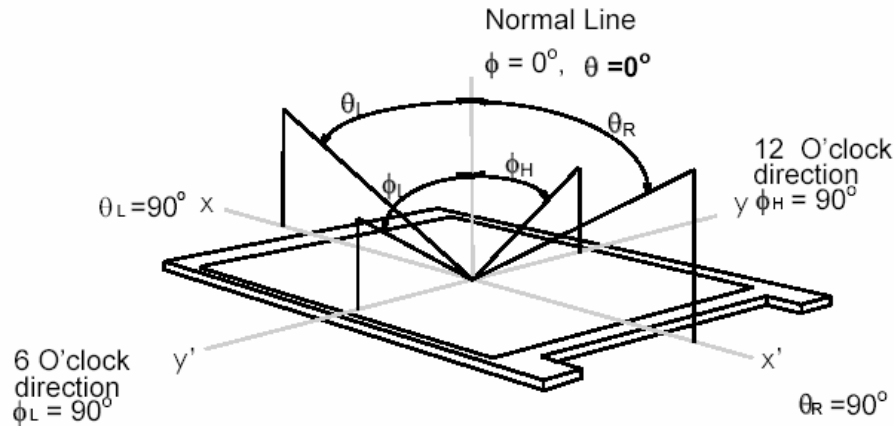


Note 8. Definition of Cross Talk:

$$\text{Cross Talk} = |Y_B - Y_A| / Y_A \times 100 (\%)$$

Where:

Y_A = Luminance of measured location without gray level 0 pattern (cd/m^2)

Y_B = Luminance of measured location with gray level 0 pattern (cd/m^2)

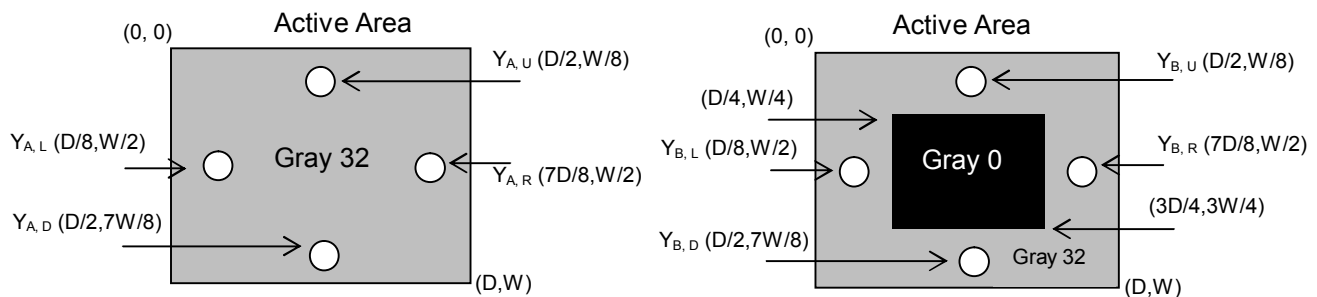

5.0 Signal Interface

5.1 Connectors

Physical interface is described as for the connector on module.

These connectors are capable of accommodating the following signals and will be following components.

| | |
|-------------------------------------|----------------------|
| Connector Name / Designation | For Signal Connector |
| Manufacturer | JAE |
| Type / Part Number | FI-XB30S-HF10 |
| Mating Housing/Part Number | FI-X30H |
| Mating Contact/Part Number | FI-XC3-1-15000 |

| | |
|-------------------------------------|--------------------|
| Connector Name / Designation | For Lamp Connector |
| Manufacturer | JST |
| Type / Part Number | BHTR-02VS |
| Mating Type / Part Number | BHTMR-02V |

5.2 Signal Pin

| Pin# | Signal Name | Pin# | Signal Name |
|------|----------------------|-------|---------------------|
| 1 | GND | 2 | VDD |
| 3 | VDD | 4 | V _{EDID} |
| 5 | NC | 6 | CLK _{EDID} |
| 7 | DATA _{EDID} | 8 | RxIN0- |
| 9 | RxIN0+ | 10 | GND |
| 11 | RxIN1- | 12 | RxIN1+ |
| 13 | GND | 14 | RxIN2- |
| 15 | RxIN2+ | 16 | GND |
| 17 | RxCLKIN- | 18 | RxCLKIN+ |
| 19 | GND | 20~30 | NC |

5.3 Signal Description

The module uses a LVDS receiver embedded in AUO's ASIC. LVDS is a differential signal technology for LCD interface and high-speed data transfer device.

| Signal Name | Description |
|----------------------|---|
| V _{EDID} | +3.3V EDID Power |
| CLK _{EDID} | EDID Clock Input |
| DATA _{EDID} | EDID Data Input |
| RxIN0-, RxIN0+ | LVDS differential data input(Red0-Red5, Green0) |
| RxIN1-, RxIN1+ | LVDS differential data input(Green1-Green5, Blue0-Blue1) |
| RxIN2-, RxIN2+ | LVDS differential data input(Blue2-Blue5, Hsync, Vsync, DSPTMG) |
| RxCLKIN-, RxCLKIN0+ | LVDS differential clock input |
| VDD | +3.3V Power Supply |
| GND | Ground |

Note: Input signals shall be in low status when VDD is off.

Internal circuit of LVDS inputs are as following.

| Signal Name | Description | |
|--|---|--|
| +RED5 +RED4 +RED3 +RED2 +RED1 +RED0 | Red Data 5 (MSB) Red Data 4 Red Data 3 Red Data 2 Red Data 1 Red Data 0 (LSB) Red-pixel Data | Red-pixel Data Each red pixel's brightness data consists of these 6 bits pixel data. |
| +GREEN 5 +GREEN 4 +GREEN 3 +GREEN 2 +GREEN 1 +GREEN 0 | Green Data 5 (MSB) Green Data 4 Green Data 3 Green Data 2 Green Data 1 Green Data 0 (LSB) Green-pixel Data | Green-pixel Data Each green pixel's brightness data consists of these 6 bits pixel data. |
| +BLUE 5 +BLUE 4 +BLUE 3 +BLUE 2 +BLUE 1 +BLUE 0 | Blue Data 5 (MSB) Blue Data 4 Blue Data 3 Blue Data 2 Blue Data 1 Blue Data 0 (LSB) Blue-pixel Data | Blue-pixel Data Each blue pixel's brightness data consists of these 6 bits pixel data. |
| -DTCLK | Data Clock | The typical frequency is 65.0 MHz. The signal is used to strobe the pixel data and DSPTMG signals. All pixel data shall be valid at the falling edge when the DSPTMG signal is high. |
| DSPTMG | Display Timing | This signal is strobed at the falling edge of -DTCLK. When the signal is high, the pixel data shall be valid to be displayed. |
| VSYN | Vertical Sync | The signal is synchronized to -DTCLK . |
| HSYN | Horizontal Sync | The signal is synchronized to -DTCLK . |

Note: Output signals from any system shall be low or Hi-Z state when VDD is off.

5.4 Signal Electrical Characteristics

Input signals shall be in low status when VDD is off.


It is recommended to refer the specifications of SN75LVDS86DGG (Texas Instruments) in detail.

Signal electrical characteristics are as follows;

| Parameter | Condition | Min | Max | Unit |
|-----------|--|------|-----|------|
| Vth | Differential Input High Voltage(Vcm=+1.2V) | | 100 | [mV] |
| Vtl | Differential Input Low Voltage(Vcm=+1.2V) | -100 | | [mV] |

LVDS Macro AC characteristics are as follows:

| | Min. | Max. |
|-----------------------|-------|-------|
| Clock Frequency (F) | 50MHz | 67MHz |
| Data Setup Time (Tsu) | 600ps | |
| Data Hold Time (Thd) | 600ps | |

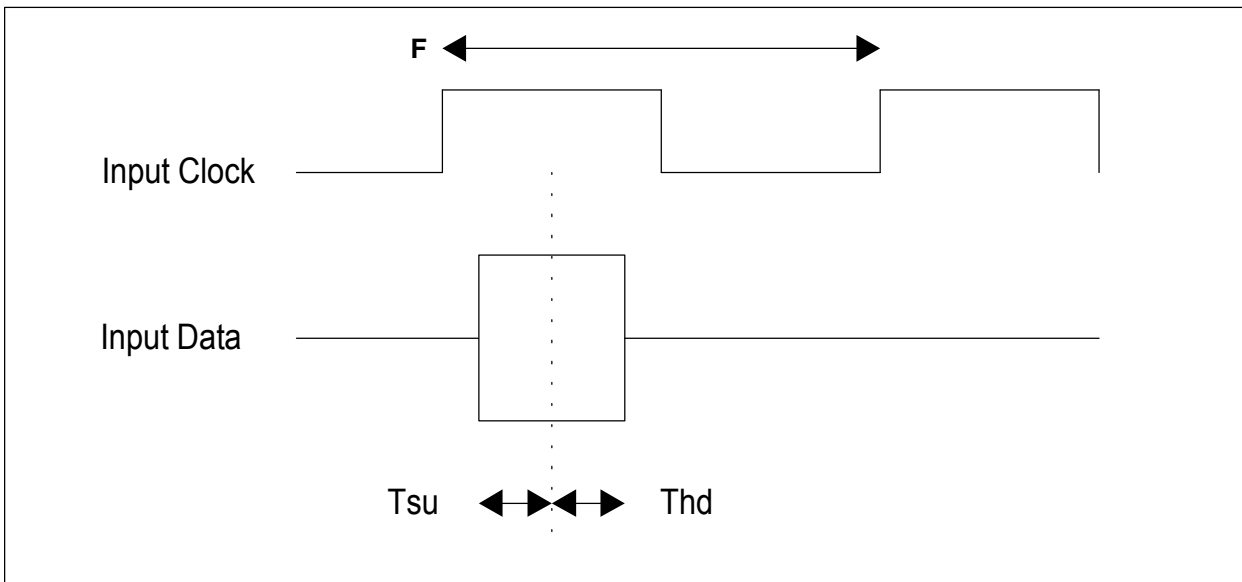

5.5 Signal for Lamp connector

| Pin # | Signal Name |
|-------|-------------------|
| 1 | Lamp High Voltage |
| 2 | Lamp Low Voltage |

6.0 Pixel Format Image

Following figure shows the relationship of the input signals and LCD pixel format.

| | | | | | | | | | | | | | | | | | | |
|------------|---|---|---|---|---|---|-----------|--|--|--|--|--|---|------|------|---|---|---|
| | 0 | | | | | | 1 | | | | | | | 1022 | 1023 | | | |
| 1st Line | R | G | B | R | G | B | - - - - - | | | | | | R | G | B | R | G | B |
| | . | . | . | . | . | . | . | | | | | | . | . | . | . | . | . |
| | . | . | . | . | . | . | . | | | | | | . | . | . | . | . | . |
| | . | . | . | . | . | . | . | | | | | | . | . | . | . | . | . |
| | . | . | . | . | . | . | . | | | | | | . | . | . | . | . | . |
| | . | . | . | . | . | . | . | | | | | | . | . | . | . | . | . |
| | . | . | . | . | . | . | . | | | | | | . | . | . | . | . | . |
| | . | . | . | . | . | . | . | | | | | | . | . | . | . | . | . |
| | . | . | . | . | . | . | . | | | | | | . | . | . | . | . | . |
| | . | . | . | . | . | . | . | | | | | | . | . | . | . | . | . |
| 768th Line | R | G | B | R | G | B | - - - - - | | | | | | R | G | B | R | G | B |

7.0 Parameter guide line for CCFL Inverter

| Parameter | Min | DP-1 | Max | Units | Condition |
|-------------------------------------|------|------|-----|----------------------|----------------------------|
| White Luminance 5 points average | 160 | 200 | — | [cd/m ²] | (Ta=25°C) |
| CCFL current(ICFL) | 3.0 | 6.0 | 6.5 | [mA] rms | (Ta=25°C) Note 2 |
| CCFL Frequency(FCFL) | 50 | 60 | 70 | [KHz] | (Ta=25°C) Note 3 |
| CCFL Ignition Voltage(Vs) | 1500 | — | — | [Volt] rms | (Ta= 0°C) Note 4 |
| CCFL Voltage (Reference) (VCFL) | — | 650 | — | [Volt] rms | (Ta=25°C) Note 5 |
| CCFL Power consumption (PCFL) | — | 3.9 | — | [Watt] | (Ta=25°C) Note 5 |

Note 1: DP-1 are AUO recommended Design Points.

*1 All of characteristics listed are measured under the condition using the AUO Test inverter.

*2 In case of using an inverter other than listed, it is recommended to check the inverter carefully. Sometimes, interfering noise stripes appear on the screen, and substandard luminance or flicker at low power may happen.

*3 In designing an inverter, it is suggested to check safety circuit ver carefully. Impedance of CCFL, for instance, becomes more than 1 [M ohm] when CCFL is damaged.

*4 Generally, CCFL has some amount of delay time after applying start-up voltage. It is recommended to keep on applying start-up voltage for 1 [Sec] until discharge.

*5 The CCFL inverter operating frequency must be carefully chosen so that no interfering noise stripes on the screen were induced.

*6 Reducing CCFL current increases CCFL discharge voltage and generally increases CCFL discharge frequency. So all the parameters of an inverter should be carefully designed so as not to produce too much leakage current from high-voltage output of the inverter.

Note 2: It should be employed the inverter, which has "Duty Dimming", if ICCFL is less than 4mA.

Note 3: The CCFL inverter operating frequency should be carefully determined to avoid interference between inverter and TFT LCD.

Note 4: The inverter open voltage should be designed larger than the lamp starting voltage at T=0°C, otherwise backlight may be blinking for a moment after turning on or not be able to turn on. The open voltage should be measured after ballast capacitor. If an inverter has shutdown function it should keep its open voltage. for longer than 1 second even if lamp connector is open.

Note 5: Calculator value for reference (ICFL×VCFL=PCFL)

8.0 Interface Timings


Basically, interface timings should match the VESA 1024x768 /60Hz (VG901101) manufacturing guide line timing.

8.1 Timing Characteristics

| Symbol | Description | Min | Typ | Max | Unit |
|--------|--------------------|------|-------|------|--------|
| fdck | DTCLK Frequency | | 65.00 | | [MHz] |
| tck | DTCLK cycle time | | 15.38 | | [nsec] |
| tx | X total time | 1054 | 1344 | 2048 | [tck] |
| tacx | X active time | | 1024 | | [tck] |
| tbkx | X blank time | 30 | 320 | 1024 | [tck] |
| Hsync | H frequency | | 48.36 | | [KHz] |
| Hsw | H-Sync width | | 136 | | [tck] |
| Hbp | H back porch | | 160 | | [tck] |
| Hfp | H front porch | | 24 | | [tck] |
| ty | Y total time | 773 | 806 | 1024 | [tx] |
| tacy | Y active time | | 768 | | [tx] |
| Vsync | Frame rate | | 60 | | [Hz] |
| Vw | V-sync Width | | 6 | | [tx] |
| Vfp | V-sync front porch | | 3 | | [tx] |
| Vbp | V-sync back porch | | 29 | | [tx] |

Note: Hsw(H-sync width) + Hbp(H-sync back porch) should be less than 515 tck.

8.2 Timing Definition

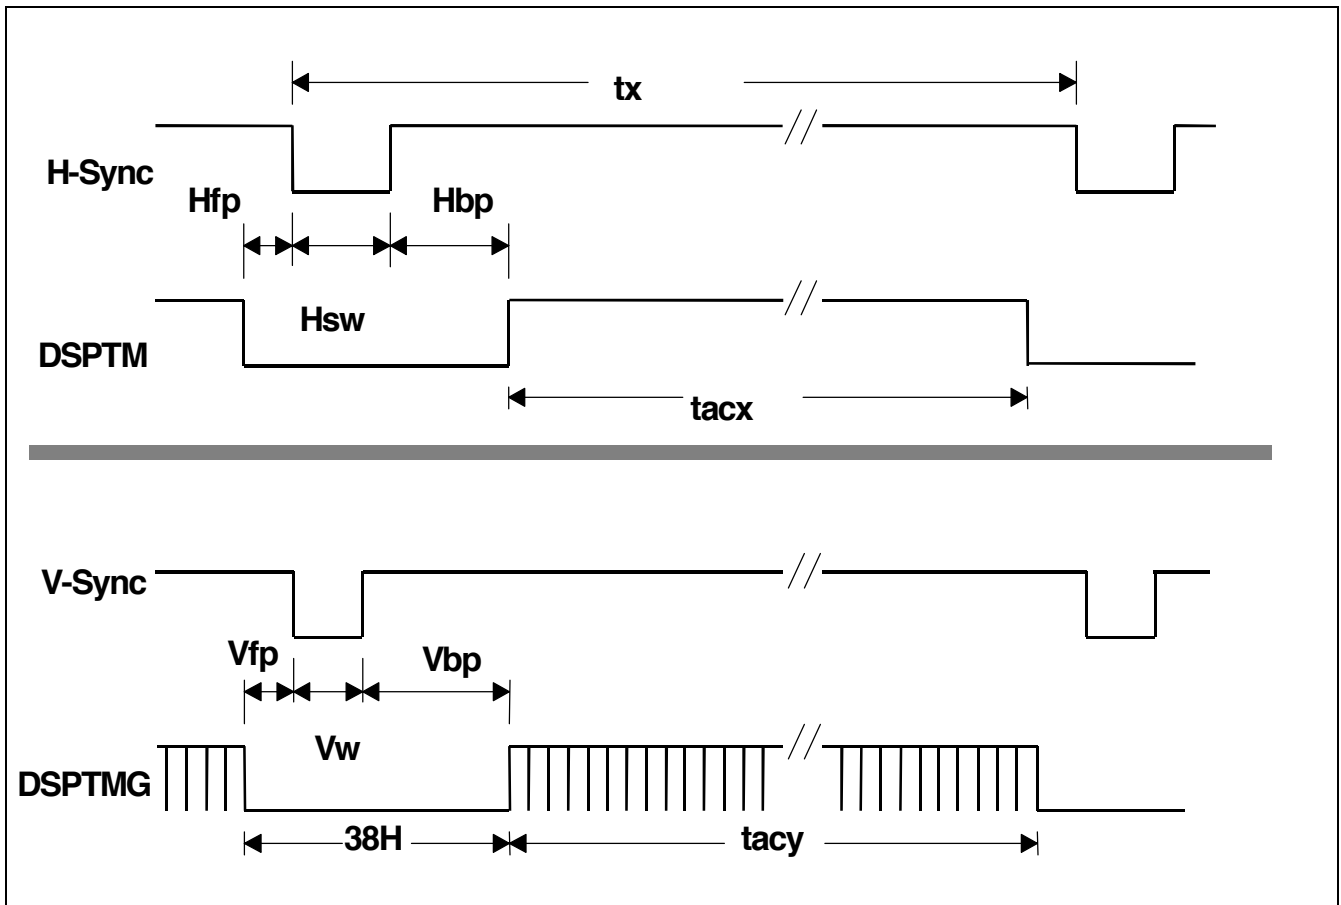

9.0 Power Consumption

Input power specifications are as follows:


| Symbol | Parameter | Min | Typ | Max | Units | Condition |
|--------------------------------|--|-----|-----|------|---------------|--|
| Module | | | | | | |
| VDD | Logic/LCD Drive Voltage | 3.0 | 3.3 | 3.6 | [Volt] | Load Capacitance 20uF |
| PDD | VDD Power | | 1.4 | | [Watt] | All Black Pattern |
| PDD Max | VDD Power max | | | 1.65 | [Watt] | Max Pattern Note |
| IDD | IDD Current | | 350 | | mA | 64 Grayscale Pattern |
| IDD Max | IDD Current max | | | 450 | mA | Vertical stripe line Pattern Note |
| VDDrp | Allowable Logic/LCD Drive Ripple Voltage | | | 100 | [mV] p-p | |
| VDDns | Allowable Logic/LCD Drive Ripple Noise | | | 100 | [mV] p-p | |
| Lamp | | | | | | |
| ICFL | CCFL current | 3.0 | 6.0 | 6.5 | [mA] rms | (Ta=25°C) |
| VCFL | CCFL Voltage (Reference) | — | 650 | — | [Volt] rms | (Ta=25°C) |
| PCFL | CCFL Power consumption | — | 3.9 | — | [Watt] | (Ta=25°C) |
| Total Power Consumption | 5.3 Watt (w/o Inverter, All black pattern)@LCM circuit 1.4 Watt(typ.),B/L input 3.9 Watt(typ.) | | | | | |

Note : VDD=3.3V

10. Power ON/OFF Sequence

VDD power and lamp on/off sequence is as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

Sequence of Power-on/off and signal-on/off

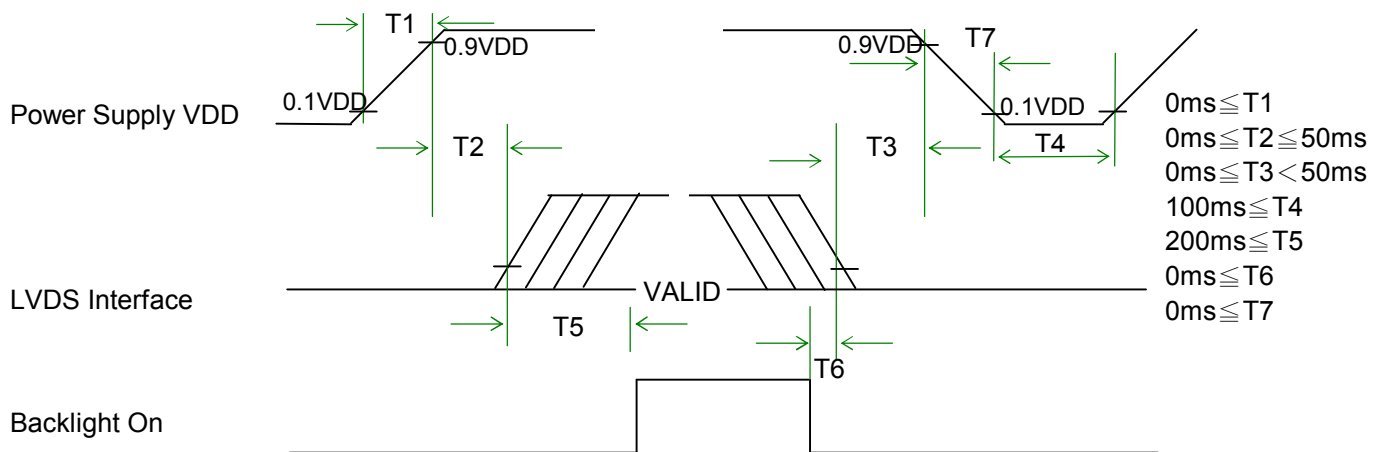

Apply the lamp voltage within the LCD operating range. When the backlight turns on before the LCD operation or the LCD turns off before the backlight turns off, the display may momentarily become abnormal.

11.0 Reliability /Safety Requirement

11.1 Reliability Test Conditions

| Items | Required Condition |
|--------------------------------|---|
| Temperature Humidity Bias | 40°C/90%,300Hr |
| High Temperature Operation | 50°C/Dry,300Hr |
| Low Temperature Operation | 0°C,500Hr |
| Continuous Life | 25°C ,2000 hours |
| On/Off Test | ON/30 sec. OFF/30sec., 30,000 cycles |
| Hot Storage | 60°C/40% RH ,240 hours |
| Cold Storage | -20°C/50% RH ,240 hours |
| Thermal Shock Test | -20°C/30 min ,60°C/30 min 100cycles |
| Hot Start Test | 50°C/1 Hr min. power on/off per 5 minutes, 5 times |
| Cold Start Test | 0°C/1 Hr min. power on/off per 5 minutes, 5 times |
| Shock Test (Non-Operating) | 240G, 2ms, Half-sine wave |
| Vibration Test (Non-Operating) | Sinusoidal vibration, 1.5G zero-to-peak, 10 to 500 Hz, 0.5 octave/minute in each of three mutually perpendicular axes. |
| ESD | Contact : operation $\pm 8\text{KV}$ / non-operation $\pm 10\text{KV}$ Air : operation $\pm 15\text{KV}$ / non-operation $\pm 20\text{KV}$ |
| Altitude Test | 10000 ft / operation / 8Hr 30000ft / non-operation / 24r |
| Maximum Side Mount Torque | 2.5kgf.cm . |

CCFL Life : 10,000 hours minimum

MTBF(Excluding the CCFL) : 30,000 hours with a confidence level 90%

11.2 Safety

UL60950

11.3 Others

(1) Sound noise

There should be no uncomfortable noise.

Being used under whatever surrounds, when power on/off, the panel should not generate uncomfortable noise. And regarding specified values are negotiated if it is needed.

(2) Open / Short

No smoke, no fire at any open/ short test

(3) MTBF : 50,000 Hr (except for backlight lamp, Life time of lamp is longer than 10,000 hours)

(C) Copyright AU Optronics


Dec., 2002 All Rights Reserved.

B141XG09 V4

No Reproduction and Redistribution Allowed.

12.0 Packing Dimension


12.1 Packing method

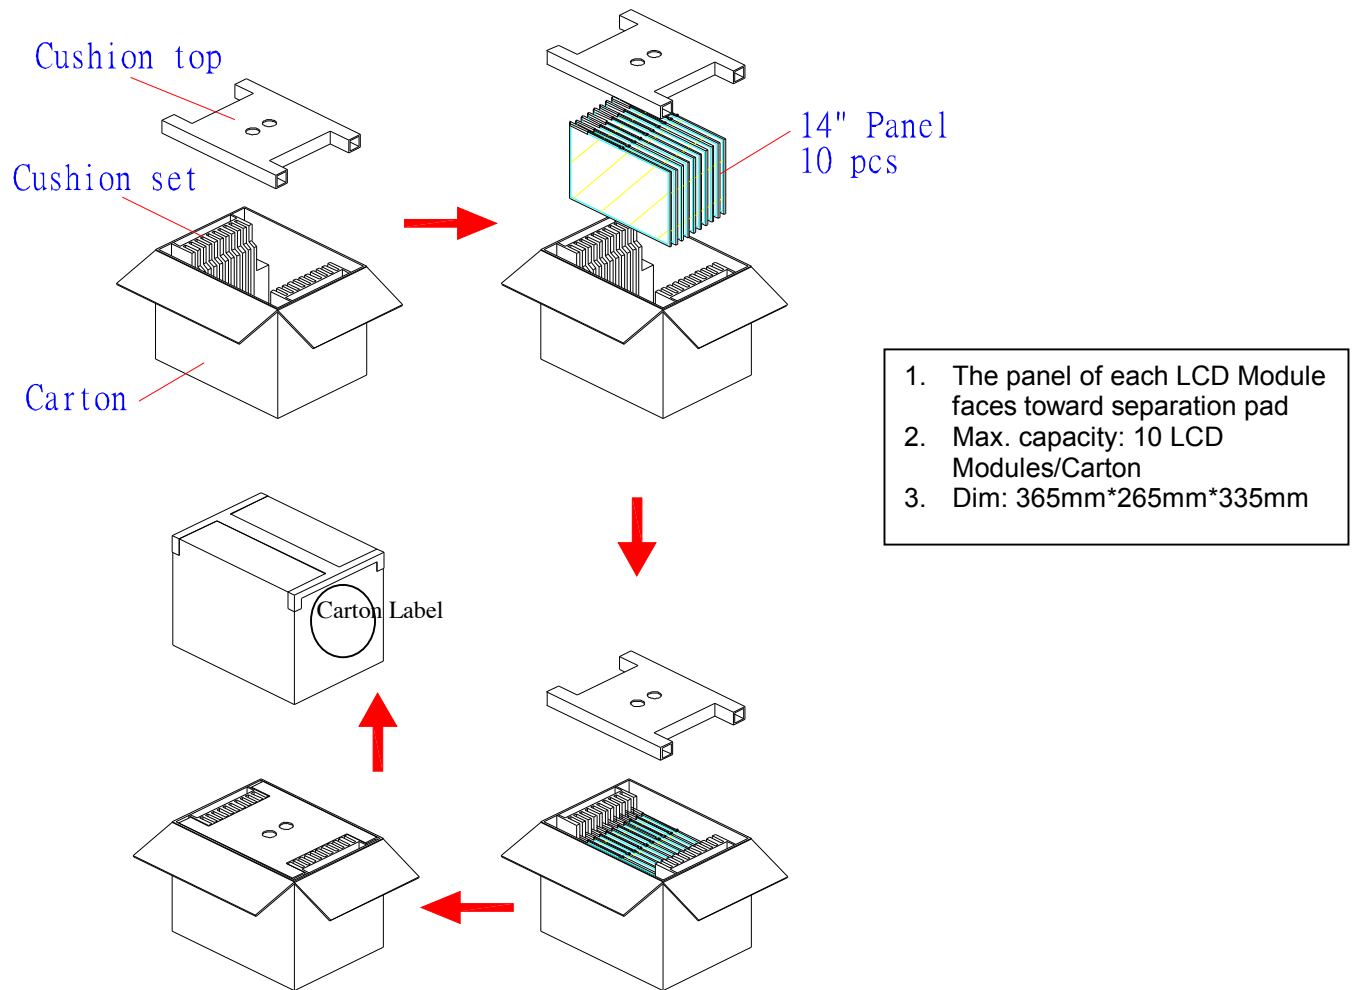

12.2 Packing Specification

| Item | Conditions |
|-------------------|---|
| Packing Vibration | Frequency Range : 5 – 50 Hz, Degree of acceleration 1G(9.8 m/s ²). Sweep rate 3 minutes Top & Bottom 60 minutes, Right & Left 15 minutes, Back & Forth 15 minutes |
| Packing Drop Test | 1 corner, 3 Edges, 6 Faces, Carton box weight (include LCDs) Dropping Height <10kg 75 cm 10-20< 55 cm 20-30< 45 cm |


12.3 Package Label

| | | | |
|---------------|--|------|----|
| AU Optronic | QTY :10 | RoHS | Pb |
| MODEL NO : | B141XG09 V4 | | |
| PART NO: | 97.14B19.401 | | |
| CUSTOMER NO: | *G33C00038110* | | |
| CARTON NO : |  | | |
| | *ZS101-05A2850052 | | |
| Made in China | | | |

12.4 Location of Package Label

Please refer to P.26

12.5 Panel Code Label on LCD

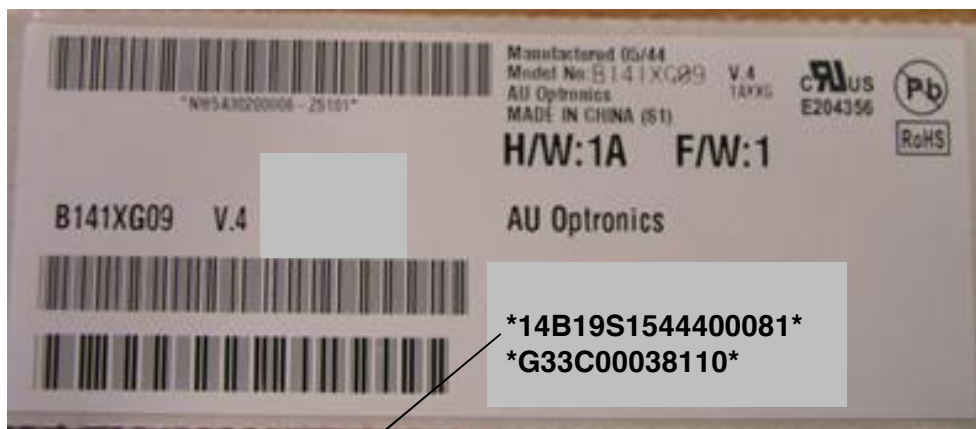


14B19 is Model Code
S1 is Factory Code
544 is Manufacture Date (first digit is year code, 2nd & 3rd digit are week code)
4 is Reversion No.
00081 is Series Code.

12.6 Location of Panel Label

Please refer to P.28

13.2 LCM Outline Dimension (Rear View)

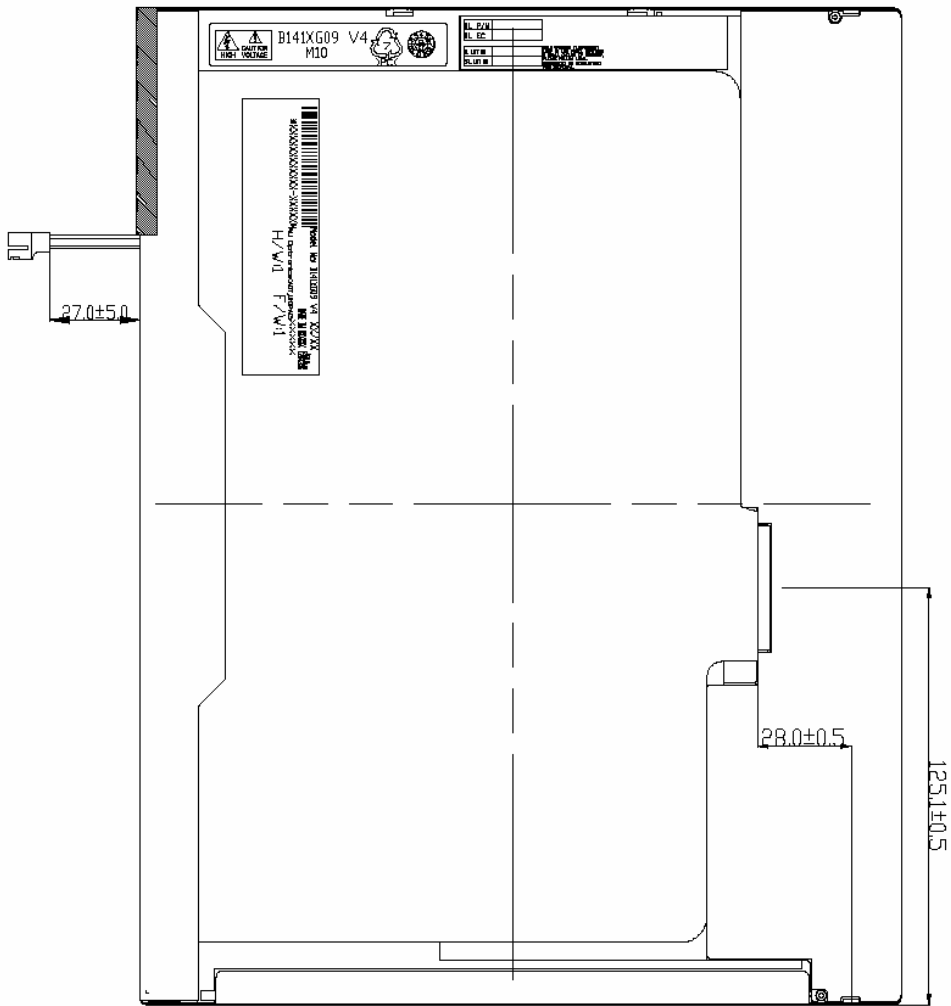


13.3 Screw Hole Depth and Center Position

Screw hole minimum depth, from side surface = 2.5 mm (See drawing)

Screw hole center location, from front surface = 2.8 ± 0.3 mm (See drawing)

Screw maximum length = 2.3 mm (See drawing)

Screw Torque: Maximum 2.5 kgf-cm

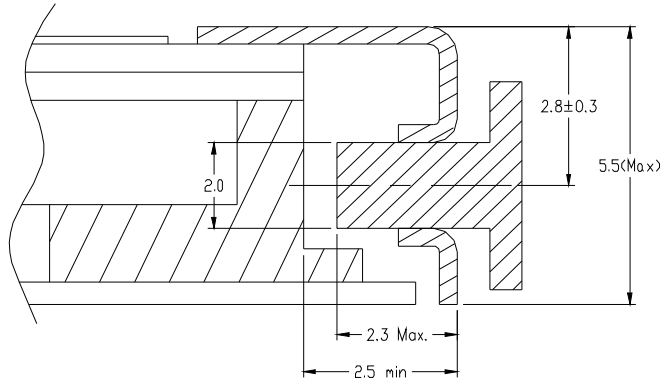

14.0 EDID

| HEX | FUNCTION | Value HEX | Value BIN | Value DEC |
|-----|------------------------|--------------|--------------|--------------|
| 00 | Header | 00 | 00000000 | 0 |
| 01 | | FF | 11111111 | 255 |
| 02 | | FF | 11111111 | 255 |
| 03 | | FF | 11111111 | 255 |
| 04 | | FF | 11111111 | 255 |
| 05 | | FF | 11111111 | 255 |
| 06 | | FF | 11111111 | 255 |
| 07 | | 00 | 00000000 | 0 |
| 08 | EISA Manuf. Code LSB | 06 | 00000110 | 6 |
| 09 | Compressed ASCII | AF | 10101111 | 175 |
| 0A | Product Code | 41 | 01000001 | 65 |
| 0B | hex, LSB first | 94 | 10010100 | 148 |
| 0C | 32-bit ser # | 00 | 00000000 | 0 |
| 0D | | 00 | 00000000 | 0 |
| 0E | | 00 | 00000000 | 0 |
| 0F | | 00 | 00000000 | 0 |
| 10 | Week of manufacture | 01 | 00000001 | 1 |
| 11 | Year of manufacture | 0E | 00001110 | 14 |
| 12 | EDID Structure Ver. | 01 | 00000001 | 1 |
| 13 | EDID revision # | 03 | 00000011 | 3 |
| 14 | Video input definition | 80 | 10000000 | 128 |
| 15 | Max H image size | 1D | 00011101 | 29 |
| 16 | Max V image size | 15 | 00010101 | 21 |
| 17 | Display Gamma | 78 | 01111000 | 120 |
| 18 | Feature support | 0A | 00001010 | 10 |
| 19 | Red/green low bits | 47 | 01000111 | 71 |
| 1A | Blue/white low bits | 95 | 10010101 | 149 |
| 1B | Red x/ high bits | 94 | 10010100 | 148 |
| 1C | Red y | 57 | 01010111 | 87 |
| 1D | Green x | 4F | 01001111 | 79 |
| 1E | Green y | 8C | 10001100 | 140 |
| 1F | Blue x | 26 | 00100110 | 38 |
| 20 | Blue y | 21 | 00100001 | 33 |
| 21 | White x | 50 | 01010000 | 80 |
| 22 | White y | 54 | 01010100 | 84 |
| 23 | Established timing 1 | 00 | 00000000 | 0 |
| 24 | Established timing 2 | 00 | 00000000 | 0 |
| 25 | Manufacturer's Timing | 00 | 00000000 | 0 |

(C) Copyright AU Optronics

Dec., 2002 All Rights Reserved.

B141XG09 V4

No Reproduction and Redistribution Allowed.

| | | | | |
|----|---|----|----------|-----|
| 26 | Standard timing #1 | 01 | 00000001 | 1 |
| 27 | | 01 | 00000001 | 1 |
| 28 | Standard timing #2 | 01 | 00000001 | 1 |
| 29 | | 01 | 00000001 | 1 |
| 2A | Standard timing #3 | 01 | 00000001 | 1 |
| 2B | | 01 | 00000001 | 1 |
| 2C | Standard timing #4 | 01 | 00000001 | 1 |
| 2D | | 01 | 00000001 | 1 |
| 2E | Standard timing #5 | 01 | 00000001 | 1 |
| 2F | | 01 | 00000001 | 1 |
| 30 | Standard timing #6 | 01 | 00000001 | 1 |
| 31 | | 01 | 00000001 | 1 |
| 32 | Standard timing #7 | 01 | 00000001 | 1 |
| 33 | | 01 | 00000001 | 1 |
| 34 | Standard timing #8 | 01 | 00000001 | 1 |
| 35 | | 01 | 00000001 | 1 |
| 36 | Pixel Clock/10,000 (LSB) | 64 | 01100100 | 100 |
| 37 | Pixel Clock/10,000 (MSB) | 19 | 00011001 | 25 |
| 38 | Horiz. Active pixels(Lower 8 bits) | 00 | 00000000 | 0 |
| 39 | Horiz.Blanking (Lower 8 bits) | 40 | 01000000 | 64 |
| 3A | Horiz. Active pixels:Horiz. Blanking (Upper4:4 bits) | 41 | 01000001 | 65 |
| 3B | | 00 | 00000000 | 0 |
| 3C | | 26 | 00100110 | 38 |
| 3D | Vert. Active pixels:Vert. Blanking (Upper4:4 bits) | 30 | 00110000 | 48 |
| 3E | | 18 | 00011000 | 24 |
| 3F | | 88 | 10001000 | 136 |
| 40 | Vert. Sync. Offset=xx lines, Sync Width=xx lines | 36 | 00110110 | 54 |
| 41 | Horz. Ver. Sync/Width (upper 2 bits) | 00 | 00000000 | 0 |
| 42 | Hori. Image size (Lower 8 bits) | 1E | 00011110 | 30 |
| 43 | Vert. Image size (Lower 8 bits) | D6 | 11010110 | 214 |
| 44 | Hori. Image size : Vert. Image size (Upper 4 bits) | 10 | 00010000 | 16 |
| 45 | | 00 | 00000000 | 0 |
| 46 | | 00 | 00000000 | 0 |
| 47 | | 18 | 00011000 | 24 |
| 48 | Detailed timing/monitor | 00 | 00000000 | 0 |
| 49 | descriptor #2 | 00 | 00000000 | 0 |
| 4A | | 00 | 00000000 | 0 |
| 4B | | FE | 11111110 | 254 |
| 4C | | 00 | 00000000 | 0 |

| | | | | |
|----|----------------------------|----|----------|-----|
| 4D | | 00 | 00000000 | 0 |
| 4E | | 00 | 00000000 | 0 |
| 4F | | 00 | 00000000 | 0 |
| 50 | | 00 | 00000000 | 0 |
| 51 | | 00 | 00000000 | 0 |
| 52 | | 00 | 00000000 | 0 |
| 53 | | 00 | 00000000 | 0 |
| 54 | | 00 | 00000000 | 0 |
| 55 | | 00 | 00000000 | 0 |
| 56 | | 00 | 00000000 | 0 |
| 57 | | 00 | 00000000 | 0 |
| 58 | | 00 | 00000000 | 0 |
| 59 | | 20 | 00100000 | 32 |
| 5A | Flag | 00 | 00000000 | 0 |
| 5B | Flag | 00 | 00000000 | 0 |
| 5C | Flag | 00 | 00000000 | 0 |
| 5D | | FE | 11111110 | 254 |
| 5E | | 00 | 00000000 | 0 |
| 5F | A | 41 | 01000001 | 65 |
| 60 | U | 55 | 01010101 | 85 |
| 61 | O | 4F | 01001111 | 79 |
| 62 | | 0A | 00001010 | 10 |
| 63 | | 20 | 00100000 | 32 |
| 64 | | 20 | 00100000 | 32 |
| 65 | | 20 | 00100000 | 32 |
| 66 | | 20 | 00100000 | 32 |
| 67 | | 20 | 00100000 | 32 |
| 68 | | 20 | 00100000 | 32 |
| 69 | | 20 | 00100000 | 32 |
| 6A | | 20 | 00100000 | 32 |
| 6B | | 20 | 00100000 | 32 |
| 6C | Flag | 00 | 00000000 | 0 |
| 6D | Flag | 00 | 00000000 | 0 |
| 6E | Flag | 00 | 00000000 | 0 |
| 6F | Data type tag:ASCII string | FE | 11111110 | 254 |
| 70 | Flag | 00 | 00000000 | 0 |
| 71 | | 42 | 01000010 | 66 |
| 72 | | 31 | 00110001 | 49 |
| 73 | | 34 | 00110100 | 52 |
| 74 | | 31 | 00110001 | 49 |
| 75 | | 58 | 01011000 | 88 |

| | | | | |
|-----------|----------------|-----------|----------|------------|
| 76 | | 47 | 01000111 | 71 |
| 77 | | 30 | 00110000 | 48 |
| 78 | | 39 | 00111001 | 57 |
| 79 | | 20 | 00100000 | 32 |
| 7A | | 56 | 01010110 | 86 |
| 7B | | 34 | 00110100 | 52 |
| 7C | | 20 | 00100000 | 32 |
| 7D | | 0A | 00001010 | 10 |
| 7E | Extension Flag | 00 | 00000000 | 0 |
| 7F | Checksum | 75 | 01110101 | 117 |