

Product Specification

SPECIFICATION FOR APPROVAL

- () Preliminary Specification
 (◆) Final Specification

Title	15.4" WXGA TFT LCD
-------	--------------------

Customer	NEC
MODEL	

SUPPLIER	LG.Philips LCD Co., Ltd.
*MODEL	LP154WX3
Suffix	TLB1

*When you obtain standard approval,
please use the above model name without suffix

APPROVED BY	SIGNATURE
/	_____
/	_____
/	_____

Please return 1 copy for your confirmation with your signature and comments.

APPROVED BY	SIGNATURE
S, C, Yun / S. Manager	_____
REVIEWED BY	
K. T. Moon / Manager	_____
PREPARED BY	
C .J. Park / Engineer	_____

**Products Engineering Dept.
LG. Philips LCD Co., Ltd**

Product Specification

Contents

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTREISTICS	6
3-2	INTERFACE CONNECTIONS	9
3-3	LVDS SIGNAL TIMING SPECIFICATIONS	10
3-4	SIGNAL TIMING SPECIFICATIONS	13
3-5	SIGNAL TIMING WAVEFORMS	13
3-6	COLOR INPUT DATA REFERNECE	14
3-7	POWER SEQUENCE	15
4	OPTICAL SFECIFICATIONS	16
5	MECHANICAL CHARACTERISTICS	19
6	RELIABLITY	26
7	INTERNATIONAL STANDARDS	27
7-1	SAFETY	
7-2	EMC	
8	PACKING	28
8-1	DESIGNATION OF LOT MARK	
8-2	PACKING FORM	
9	PRECAUTIONS	29
A	APPENDIX. Enhanced Extended Display Identification Data	31

Product Specification

RECORD OF REVISIONS

Revision No	Revision Date	Page	Description	EDID ver
0.0	Aug. 08. 2007	-	First Draft	0.0
0.1	-	4	Insert the "2Lamp" Insert the "2H Glare"	
		6	Change the Vertical dimension : 222(V,Typ.) → 225(V,Typ.) Change the Power Supply Input Current : 280(Min.),340(Typ.),400(Max.) → 340(Min.),400(Typ.),460(Max.) Change the Power Consumption : 1.12(Typ.) , 1,32(Max.) → 1.32(Typ.) , 1,52(Max.) Change the measurement pattern of power consumption : Mosaic pattern → Black pattern	
		9	Erase the "IS100-C30R-C15 ,UJU Elec."	
		11	Erase the "LVDS 2 Port"	
		15	Change the Minimum Spec. of luminance : 250nit → 260nit	
		20	Update connector dimension (110.6±1.0 → 125.1±1.0)	
		30~32	Update EDID(71MHz → 71.25MHz)	0.1
0.2	Sep. 21. 2007	6	Add the power consumption at max.-2dot pattern. : 1.32(Typ.) , 1,52(Max.) → 1.37(Typ.) , 1,57(Max.) Insert the PWM frequency of inverter.	
		12	Change the main clock frequency : 71MHz → 71.25MHz	
		-	Delete appendix of mechanical recommendation.	
		15	Add the Color coordinate of RGB.	
		27	Update the EDID (color coordinate , Product code : 0000 → 011C)	0.2
		29	Update the EDID (Checksum : 2A → 20)	
1.0	Oct. 2. 2007	6	Insert the max. power consumption pattern.	0.2
		8	Delete the "by a result of LPL internal test with NEC NBPC system"	
1.1	Oct. 23. 2007	20	Update the rear drawing.	


Product Specification

1. General Description

The LP154WX3 is a Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Fluorescent Lamp (CCFL) backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 15.4 inches diagonally measured active display area with WXGA resolution(800 vertical by 1280 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP154WX3 has been designed to apply the interface method that enables low power, high speed, low EMI.

The LP154WX3 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP154WX3 characteristics provide an excellent flat display for office automation products such as Notebook PC.

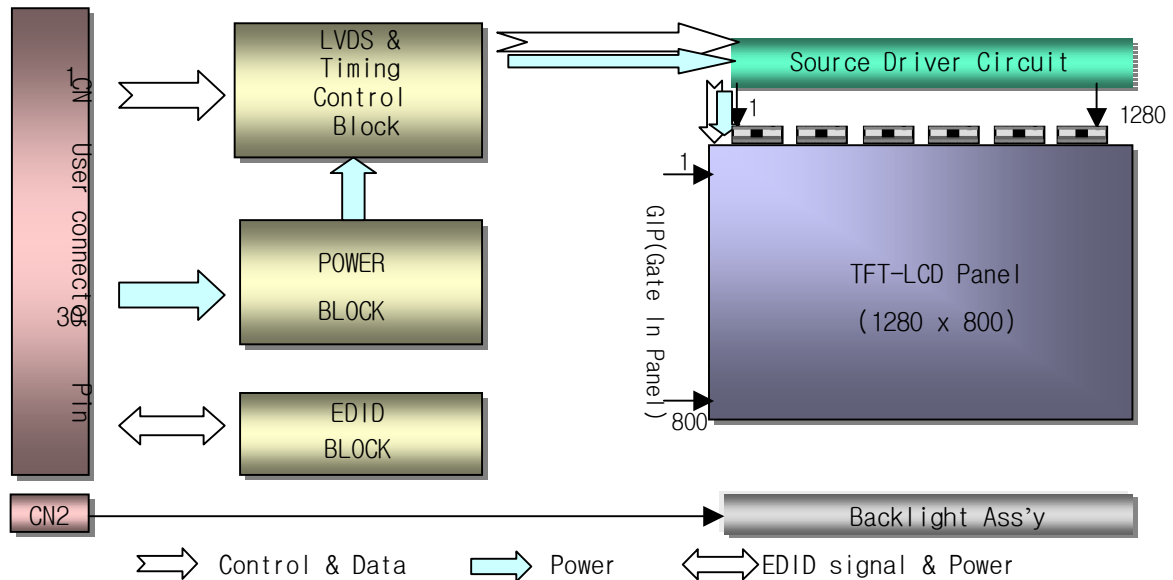

General Features

Active Screen Size	15.4 inches diagonal
Outline Dimension	344.0(H, typ) × 225.0(V, typ) × 7.0(D,Max.)[mm]
Pixel Pitch	0.25875mm × 0.25875 mm
Pixel Format	1280 horiz. By 800 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	300 cd/m2(Typ., Center 1Point), 2Lamp
Power Consumption	Total 9.8 Watt (Typ.) @ LCM circuit 1.4Watt(Typ.), B/L input 8.4Watt(Typ.)
Weight	615g (Max.)
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Glare 2H
RoHS Comply	Yes

Product Specification


2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 ± 5°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	HST	-20	60	°C	1
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1

Note : 1. Temperature and relative humidity range are shown in the figure below.
Wet bulb temperature should be 39°C Max, and no condensation of water.

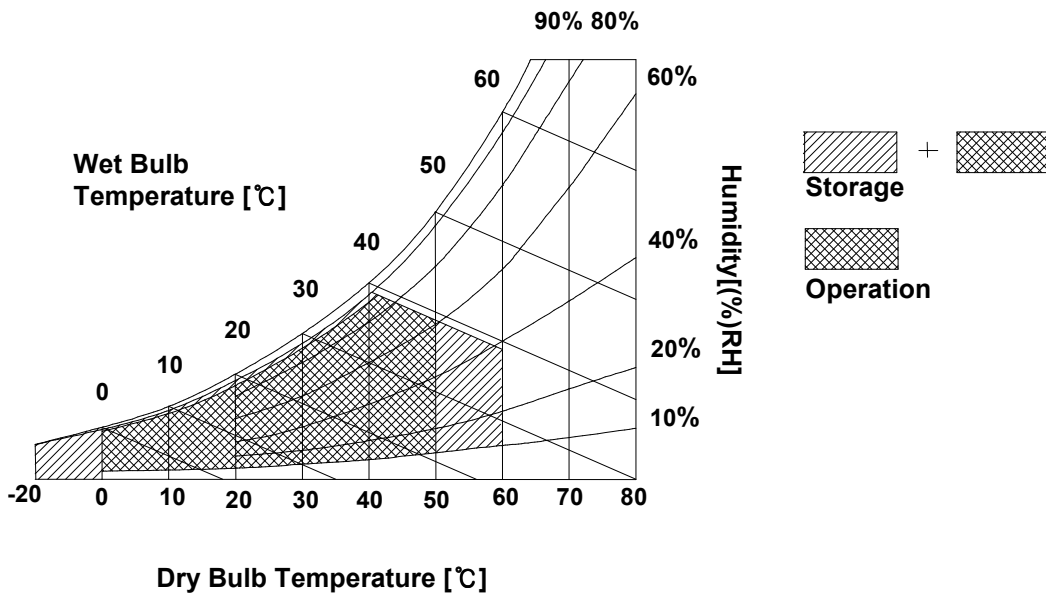

Product Specification

3. Electrical Specifications

3-1. Electrical Characteristics


The LP154WX3 requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the CCFL, is typically generated by an inverter. The inverter is an external unit to the LCD.

Table 2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
MODULE :						
Power Supply Input Voltage	VCC	3.0	3.3	3.6	V _{DC}	
Power Supply Input Current	I _{CC}	355	415	475	mA	1
Power Consumption	P _C	-	1.37	1.57		1
Differential Impedance	Z _m	90	100	110	Ohm	2
LAMP :						
Operating Voltage	V _{BL}	670(6.8mA)	695(6.0mA)	835(3.0mA)	V _{RMS}	
Operating Current	I _{BL}	3.0	6.0	6.8	mA _{RMS}	3
Power Consumption	P _{BL}	-	4.2	4.6		
Operating Frequency	f _{BL}	45	60	80	kHz	
PWM frequency of inverter	-	161	225	300	Hz	12
Discharge Stabilization Time	T _s	-	-	3	Min	4
Life Time		12,000	-	-	Hrs	5
Established Starting Voltage at 25 °C at 0 °C	V _s			1170 1400	V _{RMS} V _{RMS}	

Note)

1. The specified current and power consumption are under the Vcc = 3.3V , 25°C , fv = 60Hz condition whereas 2dot pattern is displayed and fv is the frame frequency.




2. This impedance value is needed to proper display and measured form LVDS Tx to the mating connector.
3. The typical operating current is for the typical surface luminance (L_{WH}) in optical characteristics.
4. Define the brightness of the lamp after being lighted for 5 minutes as 100%, Ts is the time required for the brightness of the center of the lamp to be not less than 95%.
5. The life time is determined as the time at which brightness of lamp is 50% compare to that of initial value at the typical lamp current.

Product Specification

Note)

6. The output of the inverter must have symmetrical(negative and positive) voltage waveform and symmetrical current waveform.(Asymmetrical ratio is less than 10%) Please do not use the inverter which has asymmetrical voltage and asymmetrical current and spike wave.
Lamp frequency may produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.
7. It is defined the brightness of the lamp after being lighted for 5 minutes as 100%.
 T_S is the time required for the brightness of the center of the lamp to be not less than 95%.
8. The lamp power consumption shown above does not include loss of external inverter.
The applied lamp current is a typical one.
9. Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp, are following.
It shall help increase the lamp lifetime and reduce leakage current.
 - a. The asymmetry rate of the inverter waveform should be less than 10%.
 - b. The distortion rate of the waveform should be within $\sqrt{2} \pm 10\%$.

* Inverter output waveform had better be more similar to ideal sine wave.

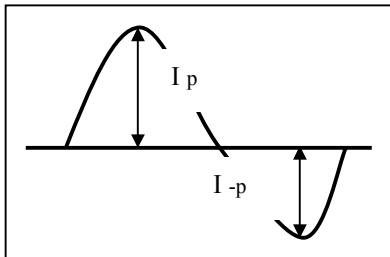

* Asymmetry rate:


$$\frac{|I_p - I_{-p}|}{I_{rms}} * 100\%$$

* Distortion rate


$$I_p \text{ (or } I_{-p}) / I_{rms}$$

10. Inverter open voltage must be more than lamp voltage for more than 1 second for start-up. Otherwise, the lamps may not be turned on.
 - ※ Do not attach a conducting tape to lamp connecting wire.
If the lamp wire attach to a conducting tape, TFT-LCD Module has a low luminance and the inverter has abnormal action. Because leakage current is occurred between lamp wire and conducting tape.


Example of current wave




Normal current wave - Standard



Abnormal current wave - Bad



Abnormal current wave - Bad




Abnormal current wave - Bad

Product Specification

Note)

11. Measuring condition of rush current.

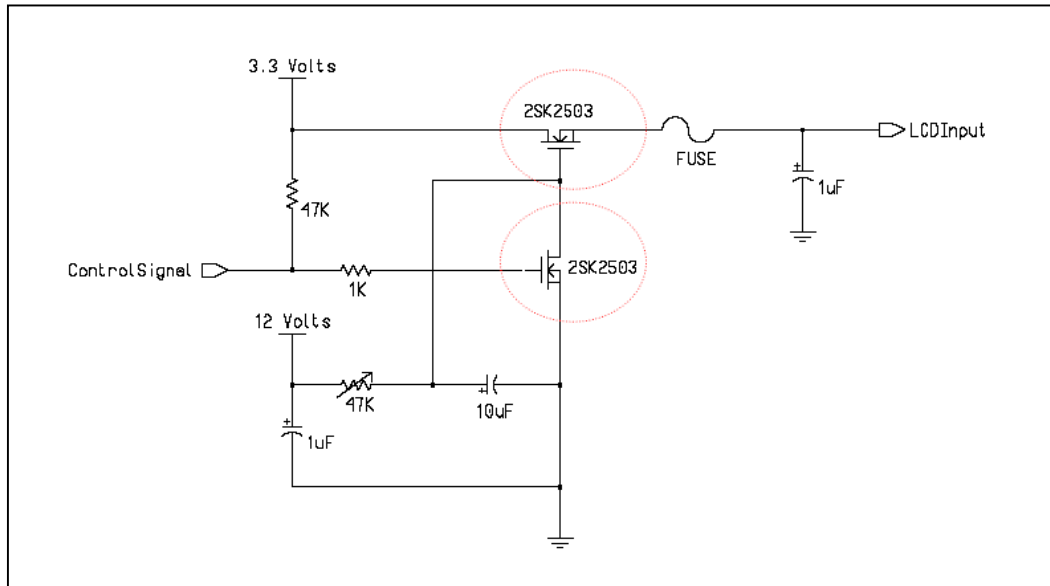

12. The inverter burst frequency is recommended to use 225Hz against wavy noise whereas 31 gray pattern is displayed and fv is the frame frequency.


Product Specification

3-2. Interface Connections

This LCD employs two interface connections, a 30 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.

The electronics interface connector is a model GT101-30S-HR11 manufactured by LSC.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	GND	Ground	1, Interface chips 1.1 LCD : SW, SW0604 (LCD Controller) including LVDS Receiver 2. Connector 2.1 LCD : GT101-30S-HR11,LS Cable its compatibles 2.2 Mating : FI-X30M or equivalent. 2.3 Connector pin arrangement  [LCD Module Rear View]
2	VCC	Power Supply, 3.3V Typ.	
3	VCC	Power Supply, 3.3V Typ.	
4	V EEDID	DDC 3.3V power	
5	NC	Reserved for supplier test point	
6	Clk EEDID	DDC Clock	
7	DATA EEDID	DDC Data	
8	R _{IN} 0-	Negative LVDS differential data input	
9	R _{IN} 0+	Positive LVDS differential data input	
10	GND	Ground	
11	R _{IN} 1-	Negative LVDS differential data input	
12	R _{IN} 1+	Positive LVDS differential data input	
13	GND	Ground	
14	R _{IN} 2-	Negative LVDS differential data input	
15	R _{IN} 2+	Positive LVDS differential data input	
16	GND	Ground	
17	CLKIN-	Negative LVDS differential clock input	
18	CLKIN+	Positive LVDS differential clock input	
19	GND	Ground	
20	NC	No Connect	
21	NC	No Connect	
22	GND	Ground	
23	NC	No Connect	
24	NC	No Connect	
25	GND	Ground	
26	NC	No Connect	
27	NC	No Connect	
28	GND	Ground	
29	NC	No Connect	
30	NC	No Connect	

The backlight interface connector is a model BHSR-02VS-1, manufactured by JST or Compatible. The mating connector part number is AMP1674817-2 or equivalent.




Table 4. BACKLIGHT CONNECTOR PIN CONFIGURATION (J3)


Pin	Symbol	Description	Notes
1	HV	Power supply for lamp (High voltage side)	1
2	LV	Power supply for lamp (Low voltage side)	1

Notes : 1. The high voltage side terminal is colored pink and the low voltage side terminal is white. (Lamp #1)
 The high voltage side terminal is colored sky blue and the low voltage side terminal is black. (Lamp #2)

Product Specification


3-3. LVDS Signal Timing Specifications

3-3-1. DC Specification

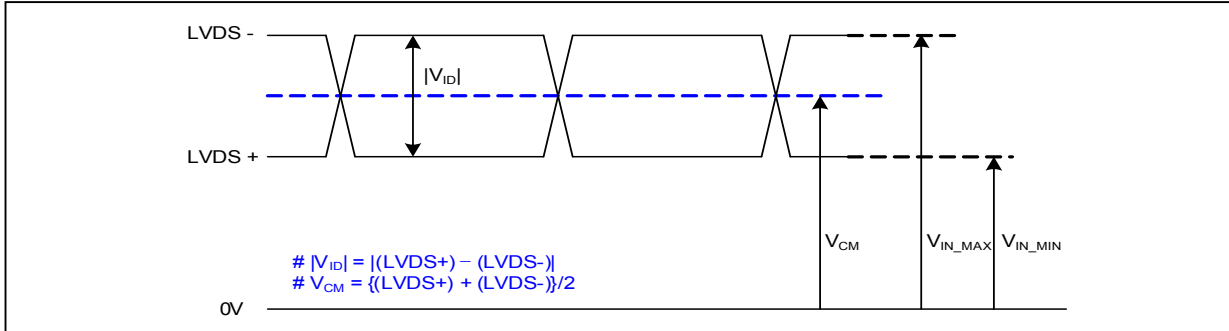


Description	Symbol	Min	Max	Unit	Notes
LVDS Differential Voltage	$ V_{ID} $	100	600	mV	-
LVDS Common mode Voltage	V_{CM}	0.6	1.8	V	-
LVDS Input Voltage Range	V_{IN}	0.3	2.1	V	-

3-3-2. AC Specification

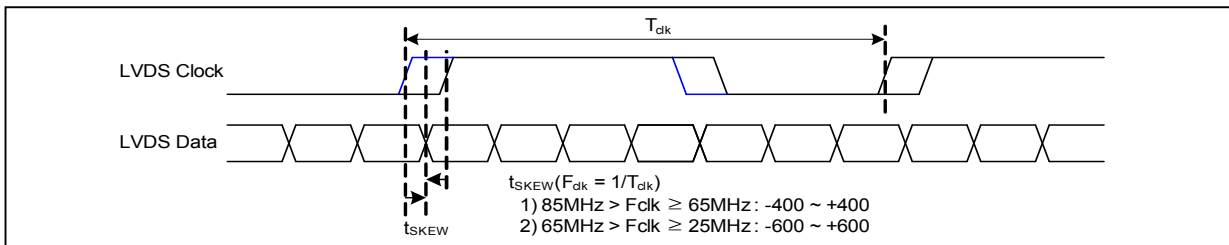


Description	Symbol	Min	Max	Unit	Notes
LVDS Clock to Data Skew Margin	t_{SKEW}	- 400	+ 400	ps	$85MHz > F_{clk} \geq 65MHz$
	t_{SKEW}	- 600	+ 600	ps	$65MHz > F_{clk} \geq 25MHz$
LVDS Clock to Clock Skew Margin (Even to Odd)	t_{SKEW_EO}	- 1/7	+ 1/7	T_{clk}	-
Maximum deviation of input clock frequency during SSC	F_{DEV}	-	± 3	%	-
Maximum modulation frequency of input clock during SSC	F_{MOD}	-	200	KHz	-

Product Specification

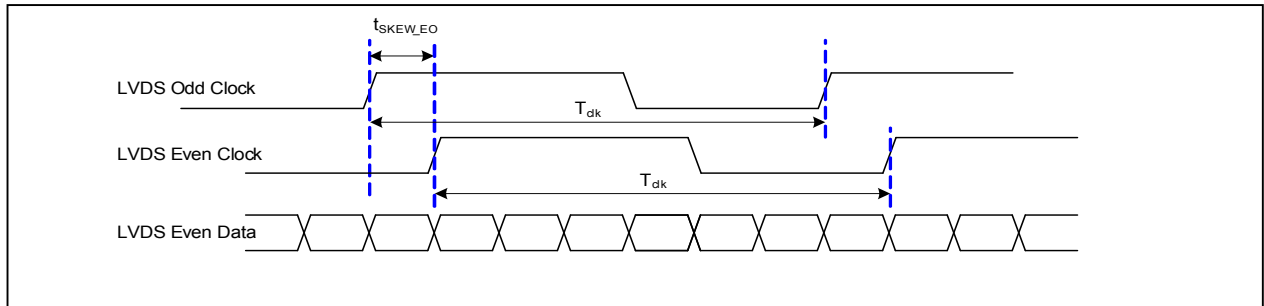


< Clock skew margin between channel >

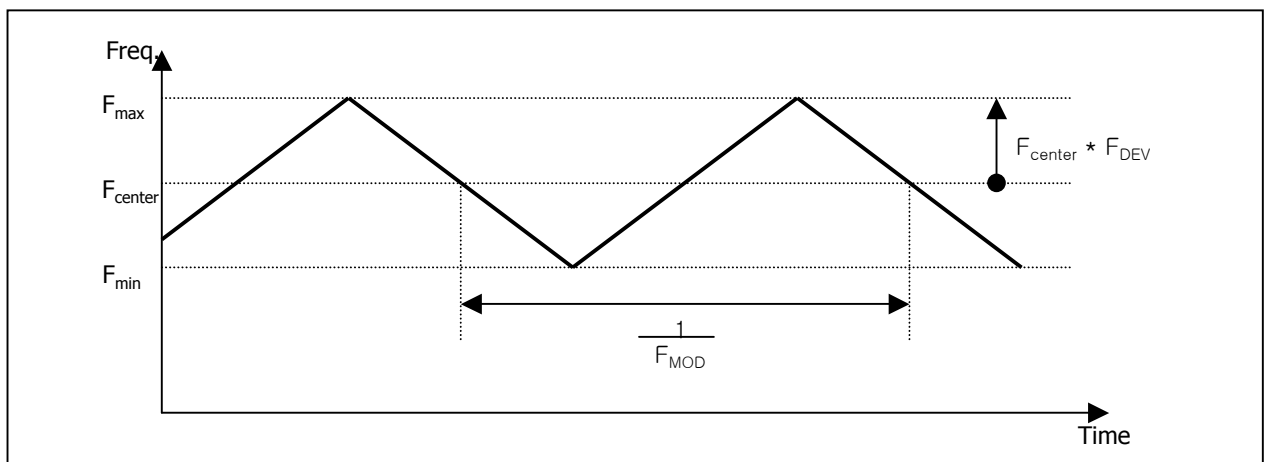

< Spread Spectrum >

3-3-3. Data Format

LVDS 1 Port

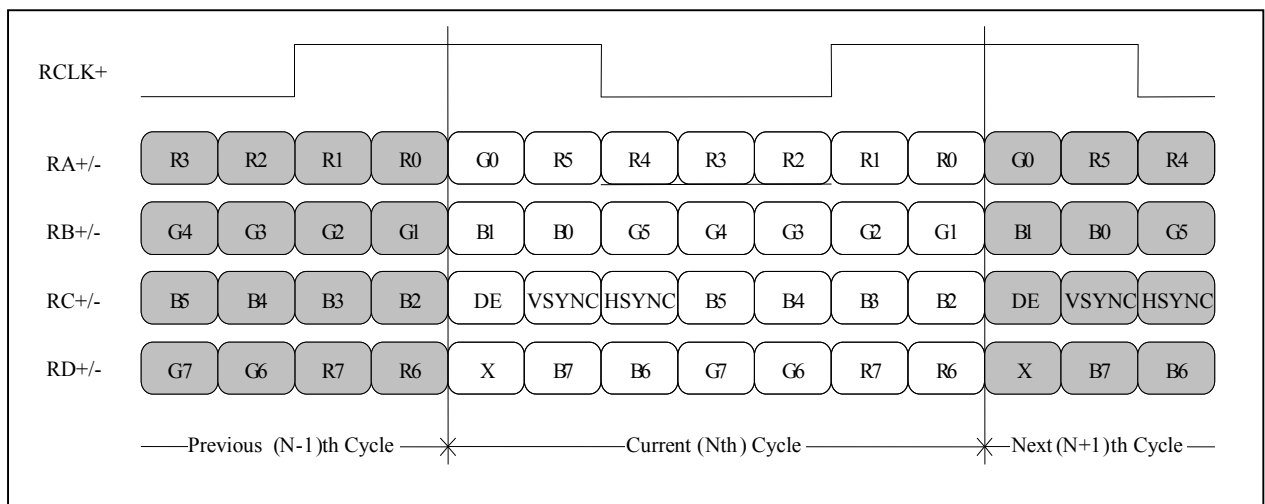

< LVDS Data Format >

Product Specification

3-4. Signal Timing Specifications


This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.

Table 6. TIMING TABLE

ITEM	Symbol	Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	71.25		MHz	
Hsync	Period	T_{HP}	1360	1440	1480	tCLK
	Width	t_{WH}	16	32	48	
	Width-Active	t_{WHA}	1280	1280	1280	
Vsync	Period	t_{VP}	809	823	860	tHP
	Width	t_{WV}	2	6	10	
	Width-Active	t_{WVA}	800	800	800	
Data Enable	Horizontal back porch	t_{HBP}	40	80	96	tCLK
	Horizontal front porch	t_{HFP}	24	48	56	
	Vertical back porch	t_{VBP}	6	14	32	tHP
	Vertical front porch	t_{VFP}	1	3	18	

3-5. Signal Timing Waveforms

Condition : VCC = 3.3V

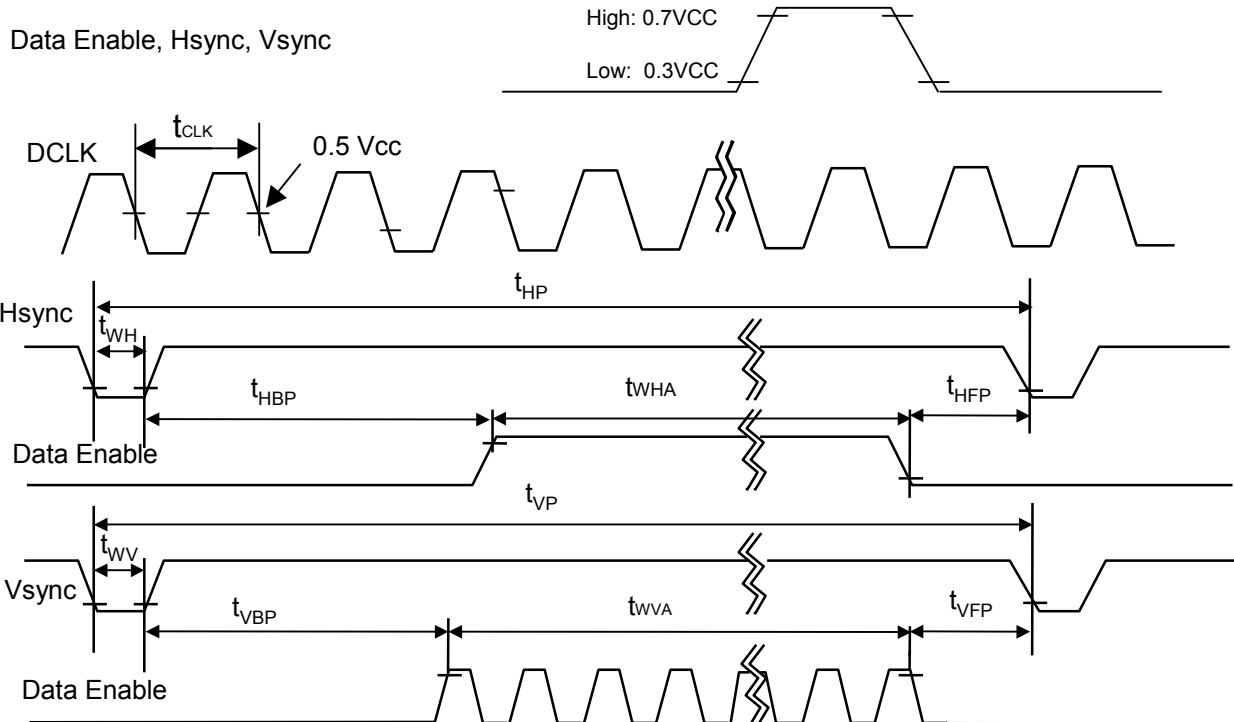

Product Specification

3-6. Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 7. COLOR DATA REFERENCE

Color		Input Color Data																	
		RED						GREEN						BLUE					
		MSB				LSB		MSB				LSB		MSB		LSB			
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
					
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
					
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
					
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

3-7. Power Sequence

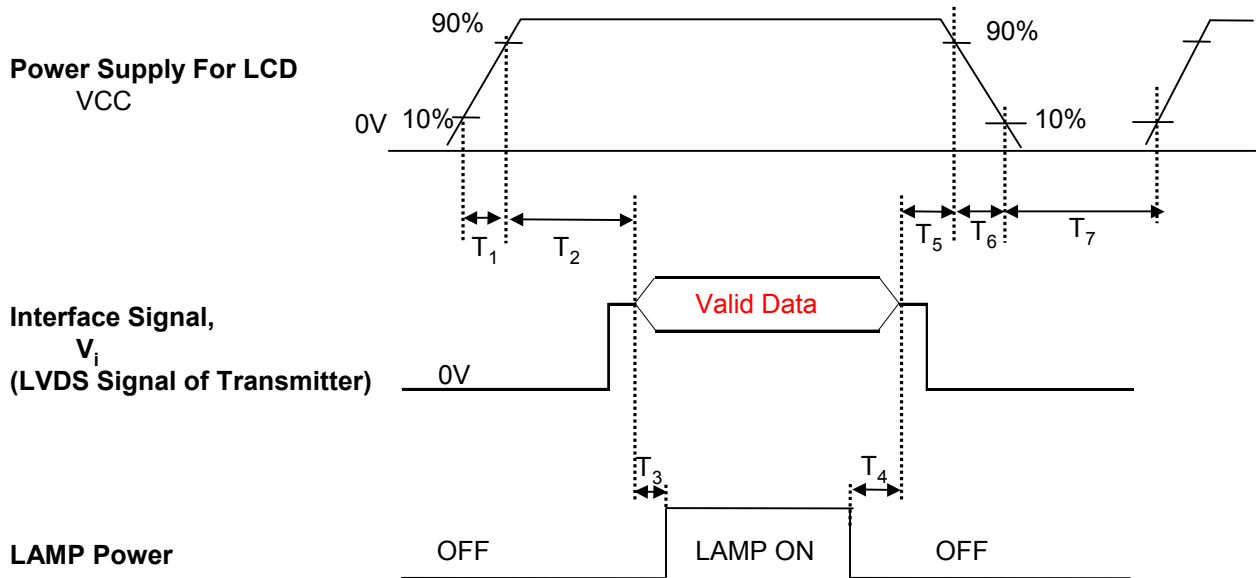


Table 8. POWER SEQUENCE TABLE

Parameter	Value			Units
	Min.	Typ.	Max.	
T ₁	0	-	10	(ms)
T ₂	0	-	50	(ms)
T ₃	200	-	-	(ms)
T ₄	200	-	-	(ms)
T ₅	0	-	50	(ms)
T ₆	0	-	10	(ms)
T ₇	400	-	-	(ms)

Note)

1. Valid Data is Data to meet "3-3. LVDS Signal Timing Specifications"
2. Please avoid floating state of interface signal at invalid period.
3. When the interface signal is invalid, be sure to pull down the power supply for LCD VCC to 0V.
4. Lamp power must be turn on after power supply for LCD and interface signal are valid.

Product Specification

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

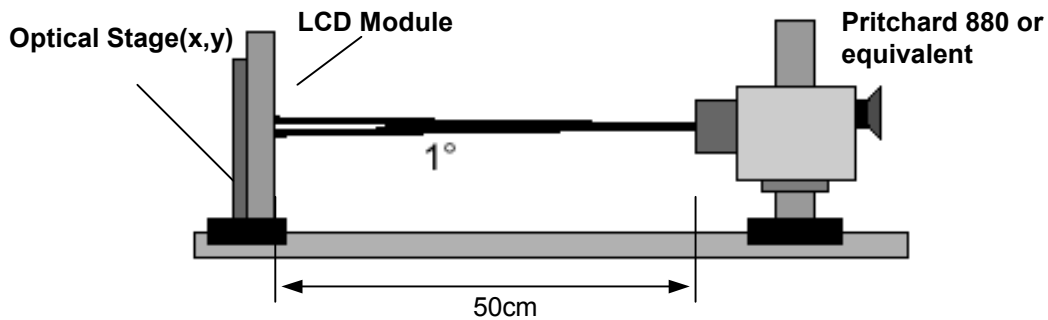


Table 9. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, fv=60Hz, fCLK= 71.0MHz, FBL = 60KHz , IBL= 6.0mA

Parameter	Symbol	Values			Units	Notes
		Min	Typ	Max		
Contrast Ratio	CR	400	600	-		1
Surface Luminance, white	L _{WH}	260	300	-	cd/m ²	2
Luminance Variation	δ_{WHITE}	-	1.8	2.0		3
Response Time	T _R + T _D		16	25	ms	4
Color Coordinates						
RED	RX	0.616	0.646	0.676		
	RY	0.310	0.340	0.370		
GREEN	GX	0.267	0.297	0.327		
	GY	0.590	0.620	0.650		
BLUE	BX	0.117	0.147	0.177		
	BY	0.034	0.064	0.094		
WHITE	WX	0.283	0.313	0.343		
	WY	0.299	0.329	0.359		
Viewing Angle						
x axis, right($\Phi=0^\circ$)	Θ_r	40	45	-	degree	5
x axis, left ($\Phi=180^\circ$)	Θ_l	40	45	-	degree	
y axis, up ($\Phi=90^\circ$)	Θ_u	10	15	-	degree	
y axis, down ($\Phi=270^\circ$)	Θ_d	30	35	-	degree	
Gray Scale						6

Product Specification

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$L_{WH} = L_1$$

3. The variation in surface luminance , The panel total variation (δ_{WHITE}) is determined by measuring L_N at each test position 1 through 13 and then defined as followed numerical formula.
For more information see FIG 2.

$$\delta_{WHITE} = \frac{\text{Maximum}(L_1, L_2, \dots L_{13})}{\text{Minimum}(L_1, L_2, \dots L_{13})}$$

4. Response time is the time required for the display to transition from white to black (rise time, Tr_R) and from black to white(Decay Time, Tr_D). For additional information see FIG 3.

5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. Gray scale specification

* $f_v = 60\text{Hz}$

Gray Level	Luminance [%] (Typ)
L0	0
L7	0.80
L15	4.25
L23	10.9
L31	21.0
L39	34.8
L47	52.5
L55	74.2
L63	100

Product Specification

FIG. 2 Luminance

<measuring point for surface luminance & measuring point for luminance variation>


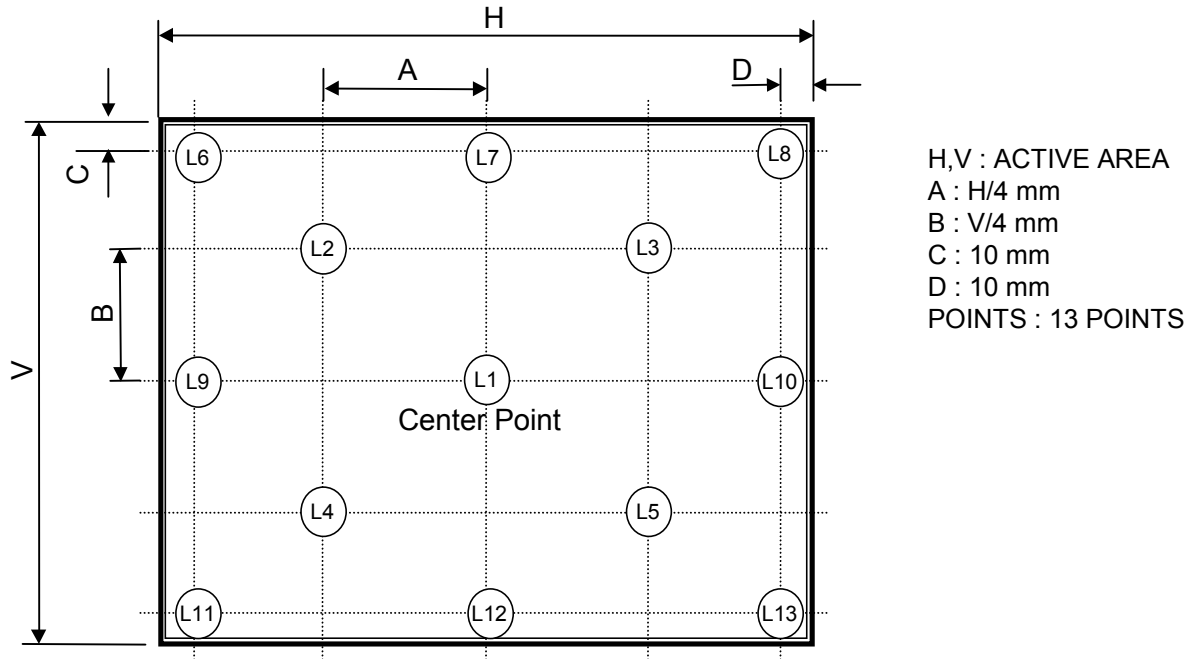


FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for “black” and “white”.

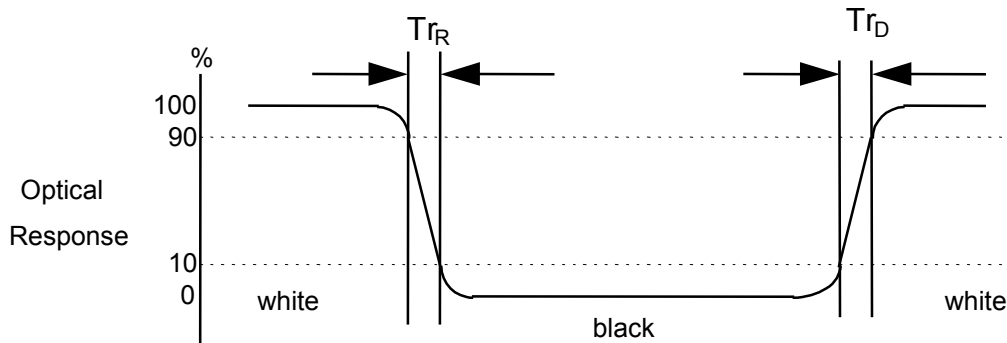

Product Specification

5. Mechanical Characteristics


The contents provide general mechanical characteristics for the model LP154WX3. In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outline Dimension	Horizontal	344.0 ± 0.5mm
	Vertical	225.0 ± 0.5mm
	Thickness	7.0mm (Max.)
Bezel Area	Horizontal	335.0 ± 0.5mm
	Vertical	210.7 ± 0.5mm
Active Display Area	Horizontal	331.2 mm
	Vertical	207.0 mm
Weight	615g (Max.)	
Surface Treatment	Low reflection treatment of the front polarizer / Glare, Hard coating 2H	

Product Specification

<FRONT VIEW>


Note) Unit:[mm], General tolerance: ± 0.5 mm

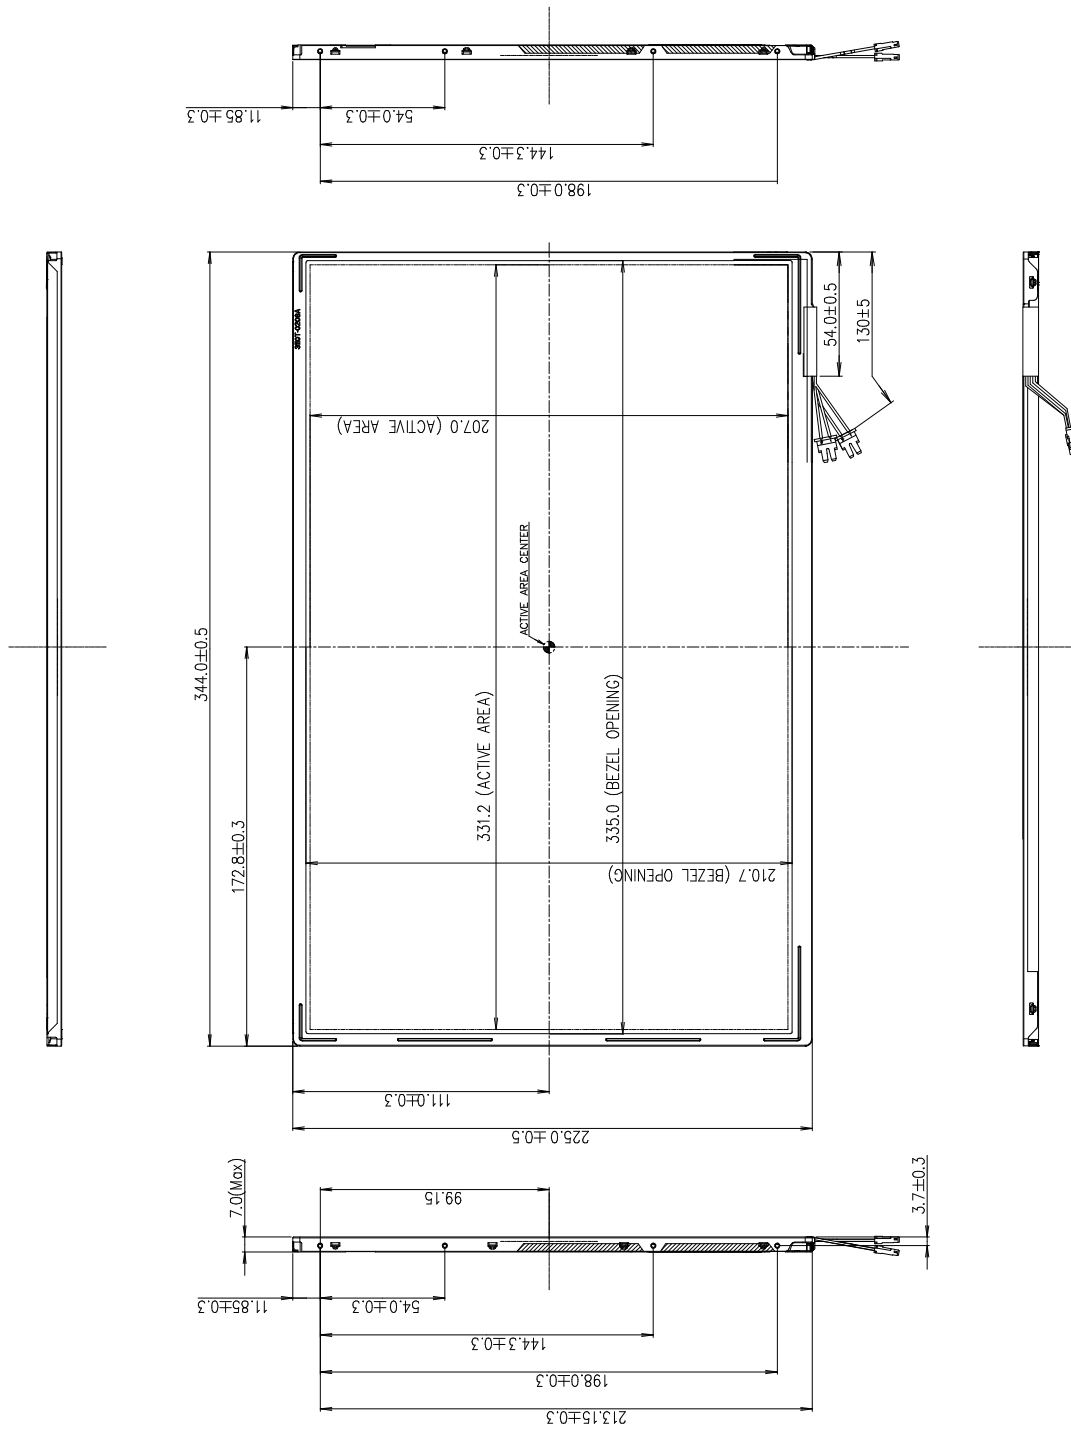

Product Specification


<REAR VIEW>

Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$

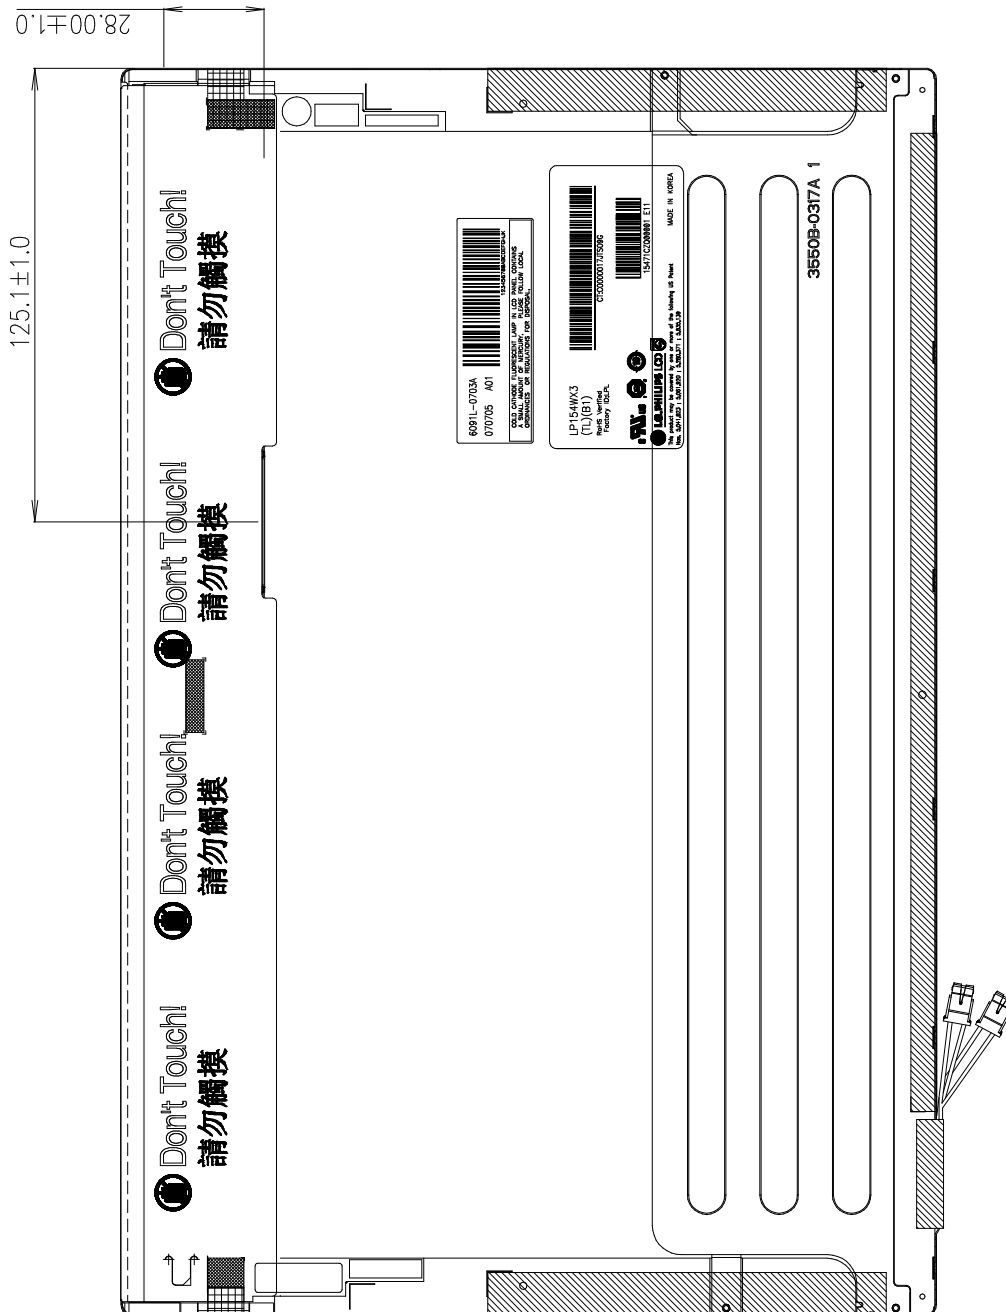

Product Specification

[DETAIL DESCRIPTION OF SIDE MOUNTING SCREW]

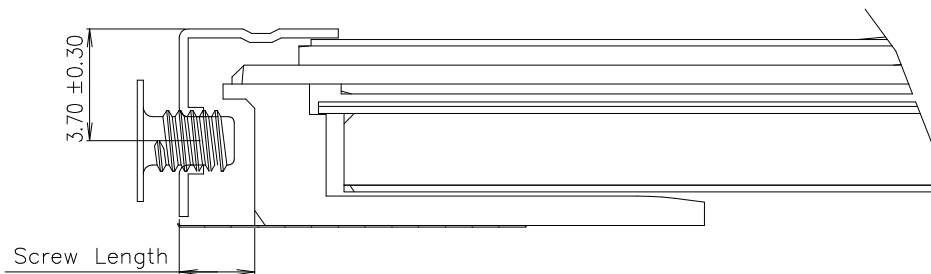

- * Mounting Screw Length (A)
= 2.0(Min) / 2.5(Max)
- * Mounting Screw Hole Depth (B)
= 2.5(Min)
- * Mounting hole location : 3.7(typ.)
- * Torque : 2.5 kgf.cm(Max)
(Measurement gauge : torque meter)

Notes : 1. Screw plated through the method of non-electrolytic nickel plating is preferred to reduce possibility that results in vertical and/or horizontal line defect due to the conductive particles from screw surface.

Product Specification

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Sine wave, 5 ~ 150Hz, 1.5G, 0.37oct/min 3 axis, 30min/axis
6	Shock test (non-operating)	- No functional or cosmetic defects following a shock to all 6 sides delivering at least 180 G in a half sine pulse no longer than 2 ms to the display module
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

7. International Standards

7-1. Safety

- a) UL 60950-1:2003, First Edition, Underwriters Laboratories, Inc., Standard for Safety of Information Technology Equipment.
- b) CAN/CSA C22.2, No. 60950-1-03 1st Ed. April 1, 2003, Canadian Standards Association, Standard for Safety of Information Technology Equipment.
- c) EN 60950-1:2001, First Edition, European Committee for Electrotechnical Standardization(CENELEC) European Standard for Safety of Information Technology Equipment.

7-2. EMC

- a) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHz to 40GHz. "American National Standards Institute(ANSI), 1992
- b) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special Committee on Radio Interference.
- c) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization.(CENELEC), 1998 (Including A1: 2000)

Product Specification

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)
E : MONTH

D : YEAR
F ~ M : SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one box : 20 pcs

b) Box Size : 425mm(L) × 328mm(W) × 310mm(H)

9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
 $V = \pm 200\text{mV}$ (Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3

Byte# (decimal)	Byte# (HEX)	Field Name and Comments	Value (HEX)	Value (binary)
0	00	Header	0 0	0000 0000
1	01		F F	1111 1111
2	02		F F	1111 1111
3	03		F F	1111 1111
4	04		F F	1111 1111
5	05		F F	1111 1111
6	06		F F	1111 1111
7	07		0 0	0000 0000
8	08	EISA manufacturer code = LPL	3 2	0011 0010
9	09		0 C	0000 1100
10	0A	Product code = 011C	0 1	0000 0001
11	0B	(Hex, LSB first)	1 C	0001 1100
12	0C	32-bit serial number	0 0	0000 0000
13	0D		0 0	0000 0000
14	0E		0 0	0000 0000
15	0F		0 0	0000 0000
16	10	Week of manufacture	0 0	0000 0000
17	11	Year of manufacture = 2007	1 1	0001 0001
18	12	EDID Structure version # = 1	0 1	0000 0001
19	13	EDID Revision # = 3	0 3	0000 0011
20	14	Video input definition = Digital I/p,non TMDS CRGB	8 0	1000 0000
21	15	Max H image size(cm) = 33.12cm(33)	2 1	0010 0001
22	16	Max V image size(cm) = 20.7cm(21)	1 5	0001 0101
23	17	Display gamma = 2.20	7 8	0111 1000
24	18	Feature support(DPMS) = Active off, RGB Color	0 A	0000 1010
25	19	Red/Green low Bits	4 2	0100 0010
26	1A	Blue/White Low Bits	9 0	1001 0000
27	1B	Red X Rx = 0.646	A 5	1010 0101
28	1C	Red Y Ry = 0.340	5 7	0101 0111
29	1D	Green X Gx = 0.297	4 C	0100 1100
30	1E	Green Y Gy = 0.620	9 E	1001 1110
31	1F	Blue X Bx = 0.147	2 5	0010 0101
32	20	Blue Y By = 0.064	1 0	0001 0000
33	21	White X Wx = 0.313	5 0	0101 0000
34	22	White Y Wy = 0.329	5 4	0101 0100
35	23	Established Timing I	0 0	0000 0000
36	24	Established Timing II	0 0	0000 0000
37	25	Manufacturer's Timings	0 0	0000 0000
38	26	Standard Timing Identification 1 was not used	0 1	0000 0001
39	27	Standard Timing Identification 1 was not used	0 1	0000 0001
40	28	Standard Timing Identification 2 was not used	0 1	0000 0001
41	29	Standard Timing Identification 2 was not used	0 1	0000 0001
42	2A	Standard Timing Identification 3 was not used	0 1	0000 0001
43	2B	Standard Timing Identification 3 was not used	0 1	0000 0001
44	2C	Standard Timing Identification 4 was not used	0 1	0000 0001
45	2D	Standard Timing Identification 4 was not used	0 1	0000 0001
46	2E	Standard Timing Identification 5 was not used	0 1	0000 0001
47	2F	Standard Timing Identification 5 was not used	0 1	0000 0001
48	30	Standard Timing Identification 6 was not used	0 1	0000 0001
49	31	Standard Timing Identification 6 was not used	0 1	0000 0001
50	32	Standard Timing Identification 7 was not used	0 1	0000 0001
51	33	Standard Timing Identification 7 was not used	0 1	0000 0001
52	34	Standard Timing Identification 8 was not used	0 1	0000 0001
53	35	Standard Timing Identification 8 was not used	0 1	0000 0001

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

Byte# (decimal)	Byte# (HEX)	Field Name and Comments	Value (HEX)	Value (binary)
54	36	1280 X 800 @ 60Hz mode : pixel clock = 71.25MHz	D 5	1101 0101
55	37	(Stored LSB first)	1 B	0001 1011
56	38	Horizontal Active = 1280 pixels	0 0	0000 0000
57	39	Horizontal Blanking = 160 pixels	A 0	1010 0000
58	3A	Horizontal Active : Horizontal Blanking = 1280 : 160	5 0	0101 0000
59	3B	Vertical Active = 800 lines	2 0	0010 0000
60	3C	Vertical Blanking = 23 lines	1 7	0001 0111
61	3D	Vertical Active : Vertical Blanking = 800 : 23	3 0	0011 0000
62	3E	Horizontal Sync. Offset = 48 pixels	3 0	0011 0000
63	3F	Horizontal Sync Pulse Width = 32 pixels	2 0	0010 0000
64	40	Vertical Sync Offset = 2 lines, Sync Width = 6 lines	2 6	0010 0110
65	41	Horizontal Vertical Sync Offset/Width upper 2bits = 0	0 0	0000 0000
66	42	Horizontal Image Size = 331.2mm(331)	4 B	0100 1011
67	43	Vertical Image Size = 207.0mm(207)	C F	1100 1111
68	44	Horizontal & Vertical Image Size	1 0	0001 0000
69	45	Horizontal Border = 0	0 0	0000 0000
70	46	Vertical Border = 0	0 0	0000 0000
71	47	Non-interlaced, Normal display, no stereo, Digital separate sync, H/V pol negatives	1 9	0001 1001
72	48	Detailed Timing Descriptor #2	0 0	0000 0000
73	49		0 0	0000 0000
74	4A		0 0	0000 0000
75	4B		0 0	0000 0000
76	4C		0 0	0000 0000
77	4D		0 0	0000 0000
78	4E		0 0	0000 0000
79	4F		0 0	0000 0000
80	50		0 0	0000 0000
81	51		0 0	0000 0000
82	52		0 0	0000 0000
83	53		0 0	0000 0000
84	55		0 0	0000 0000
85	55		0 0	0000 0000
86	56		0 0	0000 0000
87	57		0 0	0000 0000
88	58		0 0	0000 0000
89	59		0 0	0000 0000
90	5A	Detailed Timing Descriptor #3	0 0	0000 0000
91	5B		0 0	0000 0000
92	5C		0 0	0000 0000
93	5D		F E	1111 1110
94	5E		0 0	0000 0000
95	5F	L	4 C	0100 1100
96	60	G	4 7	0100 0111
97	61	P	5 0	0101 0000
98	62	h	6 8	0110 1000
99	63	i	6 9	0110 1001
100	64	l	6 C	0110 1100
101	65	i	6 9	0110 1001
102	66	p	7 0	0111 0000
103	67	s	7 3	0111 0011
104	68	L	4 C	0100 1100
105	69	C	4 3	0100 0011
106	6A	D	4 4	0100 0100
107	6B	LF	0 A	0000 1010

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

Byte# (decimal)	Byte# (HEX)	Field Name and Comments	Value (HEX)	Value (binary)
108	6C	Detailed Timing Descriptor #4	0 0	0000 0000
109	6D		0 0	0000 0000
110	6E		0 0	0000 0000
111	6F		F E	1111 1110
112	70		0 0	0000 0000
113	71	L	4 C	0100 1100
114	72	P	5 0	0101 0000
115	73	1	3 1	0011 0001
116	74	5	3 5	0011 0101
117	75	4	3 4	0011 0100
118	76	W	5 7	0101 0111
119	77	X	5 8	0101 1000
120	78	3	3 3	0011 0011
121	79	-	2 D	0010 1101
122	7A	T	5 4	0101 0100
123	7B	L	4 C	0100 1100
124	7C	B	4 2	0100 0010
125	7D	1	3 1	0011 0001
126	7E	Extension flag = 00	0 0	0000 0000
127	7F	Checksum	2 0	0010 0000