

# SPECIFICATION FOR APPROVAL

- ( ) Preliminary Specification
- ( ♦ ) Final Specification


Title


## 15.4" WXGA TFT LCD

Customer	General
MODEL	

SUPPLIER	LG.Philips LCD Co., Ltd.							
*MODEL	LP154WX4							
Suffix	TLA4							

\*When you obtain standard approval, please use the above model name without suffix

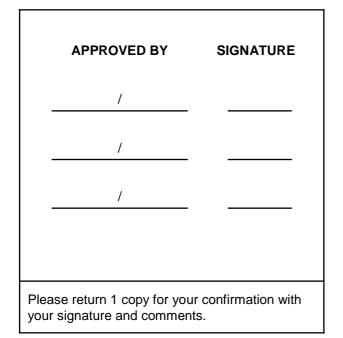

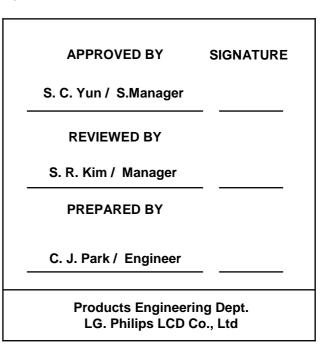



## <u>Contents</u>

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTREISTICS	6
3-2	INTERFACE CONNECTIONS	7
3-3	SIGNAL TIMING SPECIFICATIONS	9
3-4	SIGNAL TIMING WAVEFORMS	9
3-5	COLOR INPUT DATA REFERNECE	10
3-6	POWER SEQUENCE	11
4	OPTICAL SFECIFICATIONS	12
5	MECHANICAL CHARACTERISTICS	16
6	RELIABLITY	20
7	INTERNATIONAL STANDARDS	
7-1	SAFETY	21
7-2	EMC	21
8	PACKING	
8-1	DESIGNATION OF LOT MARK	22
8-2	PACKING FORM	22
9	PRECAUTIONS	23
Α	APPENDIX. Enhanced Extended Display Identification Data	25



### **RECORD OF REVISIONS**

Revision No	Revision Date	Page	Description	EDID ver
1.0	Jan. 28, 2008	-	Final Draft (Preliminary Specification)	1.0




#### **1. General Description**

The LP154WX4 is a Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Fluorescent Lamp (CCFL) backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 15.4 inches diagonally measured active display area with WXGA resolution(800 vertical by 1280 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP154WX4 has been designed to apply the interface method that enables low power, high speed, low EMI.

The LP154WX4 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP154WX4 characteristics provide an excellent flat display for office automation products such as Notebook PC.

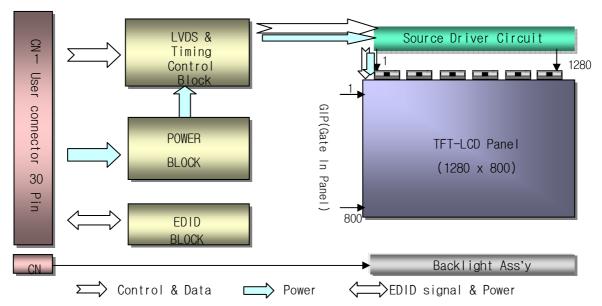

#### **General Features**

Active Screen Size	15.4 inches diagonal
Outline Dimension	344.0(H, typ) × 222.0(V, typ) × 6.2(D,typ) [mm]
Pixel Pitch	0.25875mm × 0.25875 mm
Pixel Format	1280 horiz. By 800 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	200 cd/m <sup>2</sup> (Typ.5 point)
Power Consumption	Total 5.6 Watt(Typ.) @ LCM circuit 1.4Watt(Typ.), B/L input 4.2Watt(Typ.)
Weight	560g(Typ.), 575g (Max.)
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Anti-glare treatment of the front polarizer
RoHS Comply	Yes




### 2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Parameter	Symbol	Val	ues	Units	Notes		
Faranieter	Symbol	Min	Max	Units	Notes		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 $\pm$ 5°C		
Operating Temperature	Тор	0	50	°C	1		
Storage Temperature	Нѕт	-20	60	°C	1		
Operating Ambient Humidity	Нор	10	90	%RH	1		
Storage Humidity	Нѕт	10	90	%RH	1		

#### Table 1. ABSOLUTE MAXIMUM RATINGS

Note : 1. Temperature and relative humidity range are shown in the figure below. Wet bulb temperature should be 39°C Max, and no condensation of water.

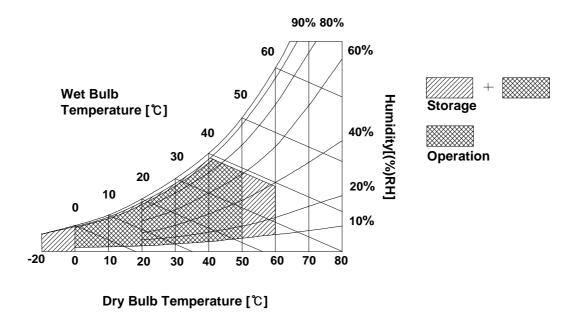



### 3. Electrical Specifications

### **3-1. Electrical Characteristics**

The LP154WX4 requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the CCFL, is typically generated by an inverter. The inverter is an external unit to the LCD.

Deverator	C: make al					
Parameter	Symbol	Min	Тур	Max	Unit	Notes
MODULE :						
Power Supply Input Voltage	VCC	3.0	3.3	3.6	V <sub>DC</sub>	
Power Supply Input Current	I <sub>cc</sub>	340	400	460	mA	1
Power Consumption	Pc	-	1.4	1.6	Watt	1
Differential Impedance	Zm	90	100	110	Ohm	2
LAMP :						
Operating Voltage	V <sub>BL</sub>	665(6.8mA)	690(6.0mA)	830(3.0mA)	V <sub>RMS</sub>	
Operating Current	I <sub>BL</sub>	3.0	6.0	6.8	mA <sub>RMS</sub>	3
Power Consumption	P <sub>BL</sub>	-	4.2	4.6		
Operating Frequency	f <sub>BL</sub>	45	60	80	kHz	
Discharge Stabilization Time	Ts	-	-	3	Min	4
Life Time		12,000	-	-	Hrs	5
Established Starting Voltage at 25℃ at 0 ℃	Vs			1200 1500	V <sub>RMS</sub> V <sub>RMS</sub>	


#### Table 2. ELECTRICAL CHARACTERISTICS

Note)

- 1. The specified current and power consumption are under the Vcc = 3.3V , 25 °C, fv = 60Hz condition whereas full black pattern is displayed and fv is the frame frequency.
- 2. This impedance value is needed to proper display and measured form LVDS Tx to the mating connector.
- 3. The typical operating current is for the typical surface luminance ( $L_{WH}$ ) in optical characteristics.
- 4. Define the brightness of the lamp after being lighted for 5 minutes as 100%, Ts is the time required for the brightness of the center of the lamp to be not less than 95%.
- 5. The life time is determined as the time at which brightness of lamp is 50% compare to that of initial value at the typical lamp current.
- 6. The output of the inverter must have symmetrical (negative and positive) voltage waveform and symmetrical current waveform.(Asymmetrical ratio is less than 10%) Please do not use the inverter which has asymmetrical voltage and asymmetrical current and spike wave. Lamp frequency may produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.
- 7. It is defined the brightness of the lamp after being lighted for 5 minutes as 100%.
- $T_{\rm S}$  is the time required for the brightness of the center of the lamp to be not less than 95%.
- 8. The lamp power consumption shown above does not include loss of external inverter.
- The applied lamp current is a typical one.



- Note)
  - 9. Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp, are following.
    - It shall help increase the lamp lifetime and reduce leakage current.
      - a. The asymmetry rate of the inverter waveform should be less than 10%.
      - b. The distortion rate of the waveform should be within  $\sqrt{2}$   $\pm10\%.$ 
        - \* Inverter output waveform had better be more similar to ideal sine wave.

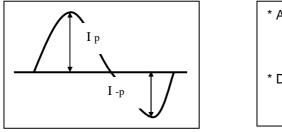

- \* Do not attach a conducting tape to lamp connecting wire.
  - If the lamp wire attach to a conducting tape, TFT-LCD Module has a low luminance and the inverter has abnormal action. Because leakage current is occurred between lamp wire and conducting tape.



#### 3-2. Interface Connections

This LCD employs two interface connections, a 30 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.

The electronics interface connector is a model GT101-30S-HR11 manufactured by LSC.

Pin	Symbol	Description	Notes
1	GND	Ground	
2	VCC	Power Supply, 3.3V Typ.	
3	VCC	Power Supply, 3.3V Typ.	1, Interface chips
4	V EEDID	DDC 3.3V power	1.1 LCD : SW, SW0604 (LCD Controller)
5	NC	Reserved for supplier test point	including LVDS Receiver
6	Clk EEDID	DDC Clock	1.2 System : ? or equivalent * Pin to Pin compatible with LVDS
7	DATA EEDID	DDC Data	
8	R <sub>IN</sub> 0-	Negative LVDS differential data input	2. Connector
9	R <sub>IN</sub> 0+	Positive LVDS differential data input	2.1 LCD :IS100-C30R-C15 ,UJU Elec. GT101-30S-HR11,LS Cable
10	GND	Ground	its compatibles
11	R <sub>IN</sub> 1-	Negative LVDS differential data input	2.2 Mating : FI-X30M or equivalent.
12	R <sub>IN</sub> 1+	Positive LVDS differential data input	2.3 Connector pin arrangement
13	GND	Ground	
14	R <sub>IN</sub> 2-	Negative LVDS differential data input	30 1
15	R <sub>IN</sub> 2+	Positive LVDS differential data input	
16	GND	Ground	
17	CLKIN-	Negative LVDS differential clock input	[LCD Module Rear View]
18	CLKIN+	Positive LVDS differential clock input	
19	GND	Ground	
20	NC	No Connect	
21	NC	No Connect	
22	GND	Ground	
23	NC	No Connect	
24	NC	No Connect	
25	GND	Ground	
26	NC	No Connect	
27	NC	No Connect	
28	GND	Ground	
29	NC	No Connect	
30	NC	No Connect	

#### Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

The backlight interface connector is a model BHSR-02VS-1, manufactured by JST or Compatible. The mating connector part number is SM02B-BHSS-1 or equivalent.

#### Table 5. BACKLIGHT CONNECTOR PIN CONFIGURATION (J3)

Pin	Symbol	Description	Notes
1	HV	Power supply for lamp (High voltage side)	1
2	LV	Power supply for lamp (Low voltage side)	1

Notes : 1. The high voltage side terminal is colored Pink and the low voltage side terminal is White.

Ver. 1.0	Jan. 28, 2008	8 / 27
----------	---------------	--------



### 3-3. Signal Timing Specifications


This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.

ITEM	Symbol		Min	Тур	Max	Unit	Note
DCLK	Frequency f <sub>CLK</sub>		66.0	69.3	76.0	MHz	
Hsync	Period	Thp	1360	1416	1480		
	Width		16	24	48	tCLK	
	Width-Active	t <sub>wha</sub>	1280	1280	1280		
Vsync	Period	t <sub>vP</sub>	809	816	860		
	Width	t <sub>wv</sub>	2	6	10	tHP	
	Width-Active	t <sub>wva</sub>	800	800	800		
Data	Horizontal back porch	t <sub>HBP</sub>	40	64	96	tCLK	
Enable	Horizontal front porch		24	48	56	ICLK	
	Vertical back porch t		6	7	32	tHP	
	Vertical front porch	t <sub>vFP</sub>	1	3	18	u IP	


#### Table 6. TIMING TABLE

### 3-4. Signal Timing Waveforms

Data Enable, Hsync, Vsync



Condition : VCC = 3.3V

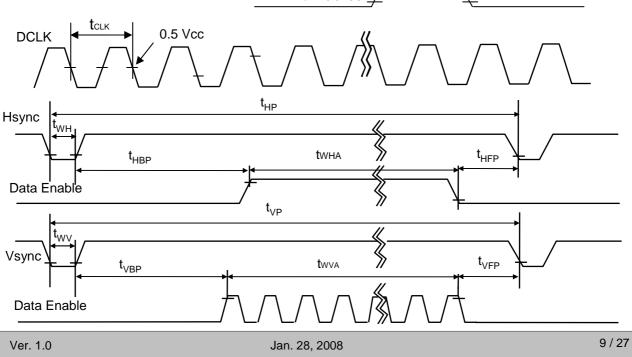



### 3-5. Color Input Data Reference


The brightness of each primary color (red,green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Color		Input Color Data																	
		RED				GREEN				BLUE									
		MSE						MSE					LSB						LSB
	1	R 5	R 4	R 3	R 2	R 1	R 0	G 5	G 4	G 3	G 2	G 1	G 0	B 5	B 4	B 3	B 2	B 1	B 0
	Black	0	0	0	0 	0	0	0 	.0 	0	0	0	0	0 	0	0	0	0	0
	Red	1 	1 	1 	1 	1 	1	0 	0	0	0	0	0	0 	0	0	0	0	0
	Green	0	0	. 0	0	0	0	1	1		1	1	1	0	0	0	0	0	0
Basic	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Color	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
RED													• • • • • •						
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
GREEN				•••••					••••	•••••	••••• 		• • • • • •			· · · · · · · · · · · · · · · · · · ·	 		
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	 0	0	0	0	0	0	 0	0	0	0	0	 1
BLUE				•••••	••••					•••••	• • • • • ••		• • • • • •			· · · · · ·	••••• ••		
	BLUE (62)	0	0	0	0		0	 0	0	0	0	0	0	 1		1	 1	1	 0
	BLUE (63)	0	0	0	0			 0	0	0	0	0	0	 1		 1	 1	 1	 1

Table 7. COLOR DATA REFERENCE



#### 3-6. Power Sequence

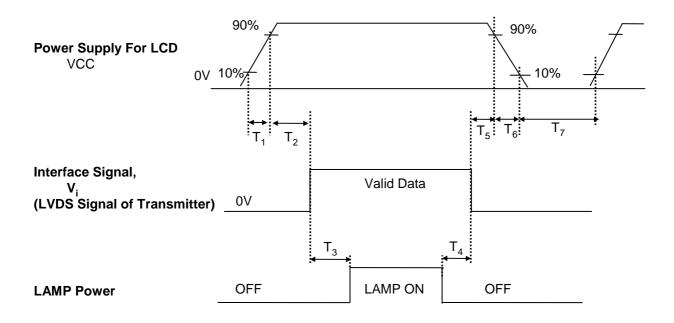

#### Table 8. POWER SEQUENCE TABLE

Parameter		Value		Units
	Min.	Тур.	Max.	
T <sub>1</sub>	0.5	-	10	(ms)
T <sub>2</sub>	0	-	50	(ms)
T <sub>3</sub>	200	-	-	(ms)
T <sub>4</sub>	200	-	-	(ms)
T <sub>5</sub>	0	-	50	(ms)
T <sub>6</sub>	0	-	10	(ms)
T <sub>7</sub>	200	-	-	(ms)

#### Note)

1. Please avoid floating state of interface signal at invalid period.

2. When the interface signal is invalid, be sure to pull down the power supply for LCD VCC to 0V.


3. Lamp power must be turn on after power supply for LCD and interface signal are valid.



### 4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of  $\Phi$  and  $\Theta$  equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

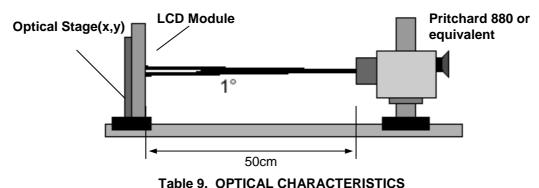

#### FIG. 1 Optical Characteristic Measurement Equipment and Method

	IICAL		101100	,	

			1a - 250, vot	$-5.5^{\circ}, 1^{\circ}-0$	$O_{12}, I_{CLK}$	$71.010112, 1_{BL} = 0.0117$
	O make at		Values		L los ita	Netes
Parameter	Symbol	Min	Тур	Max	- Units	Notes
Contrast Ratio	CR	300	400	-		1
Surface Luminance, white	L <sub>WH</sub>	170	200	-	cd/m <sup>2</sup>	2
Luminance Variation	$\delta_{\text{WHITE}}$	-	1.4	1.6		3
Response Time	Tr <sub>R</sub> + Tr <sub>D</sub>		16		ms	4
Color Coordinates		• • • • • • • • • • • • • • • • • •				
RED	RX	0.570	0.600	0.630		
	RY	0.321	0.351	0.381		
GREEN	GX	0.295	0.325	0.355		
	GY	0.524	0.554	0.584		
BLUE	BX	0.124	0.154	0.184		
	BY	0.115	0.145	0.175		
WHITE	WX	0.283	0.313	0.343		
	WY	0.299	0.329	0.359		
Viewing Angle						5
x axis, right( $\Phi$ =0°)	Θr	40	45	-	degree	
x axis, left ( $\Phi$ =180°)	ΘΙ	40	45	-	degree	
y axis, up ( $\Phi$ =90°)	Θu	10	15	-	degree	
y axis, down ( $\Phi$ =270°)	Θd	30	35		degree	
Gray Scale						6

Ta=25°C, VCC=3.3V, fv=60Hz,  $f_{CLK}$ = 71.0MHz,  $I_{BL}$ = 6.0mA



LP154WX4 Liquid Crystal Display

Note)

1. Contrast Ratio(CR) is defined mathematically as Surface Luminance with all white pixels

Contrast Ratio =

Surface Luminance with all black pixels

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

 $L_{WH} = Average(L_1, L_2, \dots, L_5)$ 

3. The variation in surface luminance , The panel total variation ( $\delta_{WHITE}$ ) is determined by measuring L<sub>N</sub> at each test position 1 through 13 and then defined as followed numerical formula. For more information see FIG 2.

 $\delta_{\text{WHITE}} = \frac{\text{Maximum}(L_1, L_2, \dots, L_{13})}{\text{Minimum}(L_1, L_2, \dots, L_{13})}$ 

- 4. Response time is the time required for the display to transition from white to black (rise time,  $Tr_R$ ) and from black to white(Decay Time,  $Tr_D$ ). For additional information see FIG 3.
- 5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. (	Gray	scale	specification
------	------	-------	---------------


 $f_{V} = 60$ Hz

Gray Level	Luminance [%] (Typ)
LO	0
L7	0.8
L15	4.25
L23	10.9
L31	21.0
L39	34.8
L47	52.5
L55	74.2
L63	100



#### FIG. 2 Luminance


<measuring point for surface luminance & measuring point for luminance variation>

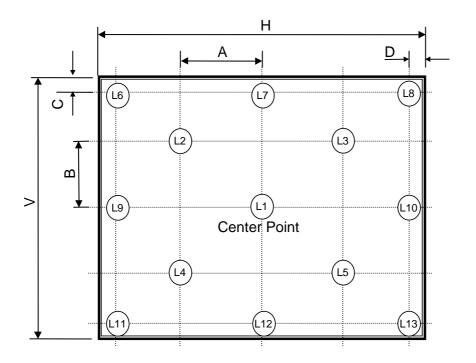

H,V : ACTIVE AREA A : H/4 mm B : V/4 mm C : 10 mm D : 10 mm POINTS : 13 POINTS


#### FIG. 3 Response Time


The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

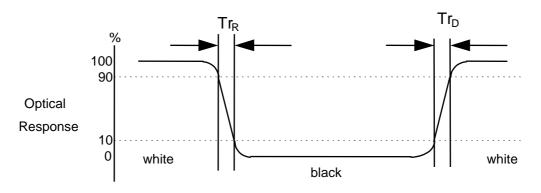



### FIG. 4 Viewing angle



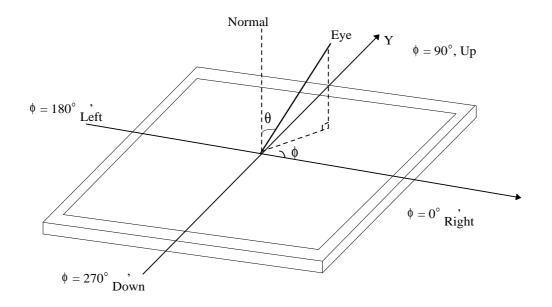




### 5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP154WX4. In addition the figures in the next page are detailed mechanical drawing of the LCD.


	Horizontal	$344.0\pm0.5\text{mm}$				
Outline Dimension	Vertical	$222.0\pm0.5\text{mm}$				
	Thickness	6.5mm (max)				
Bezel Area	Horizontal	335.0 ± 0.5mm				
Dezel Alea	Vertical	$210.7\pm0.5\text{mm}$				
Active Display Area	Horizontal	331.2 mm				
Active Display Area	Vertical	207.0 mm				
Weight	560g(Typ.), 575g (Max.)					
Surface Treatment	Anti-glare treatment of the front polarizer					





#### <FRONT VIEW>

#### Note) Unit:[mm], General tolerance: $\pm 0.5$ mm

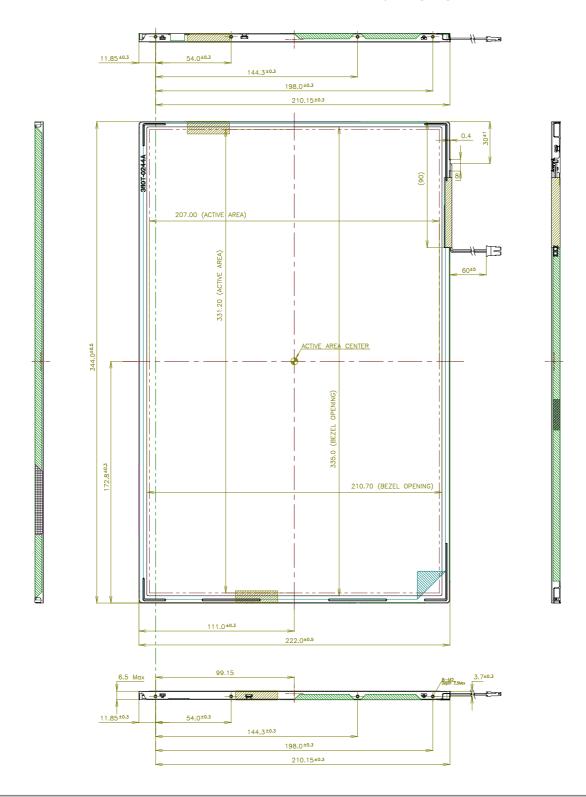


Jan. 28, 2008



#### LP154WX4 Liquid Crystal Display


### **Product Specification**

#### <REAR VIEW>

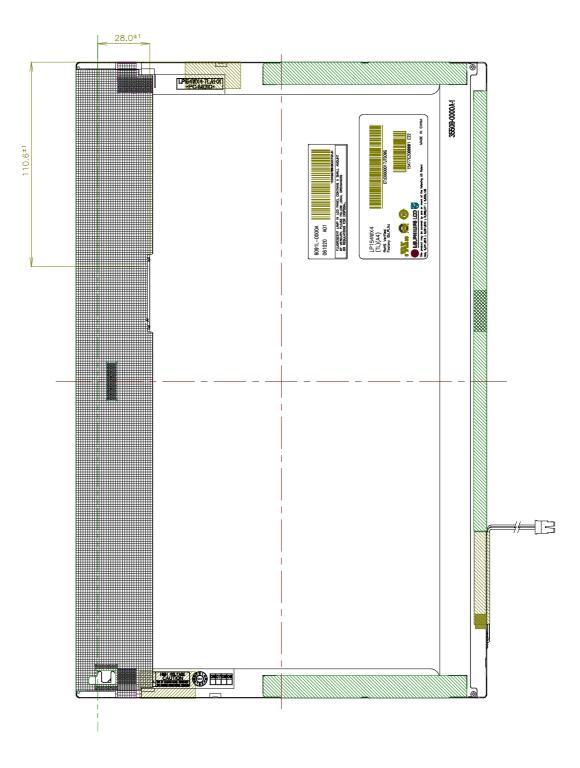





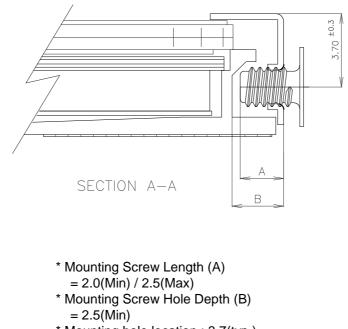

- \* Mounting hole location : 3.7(typ.)
- \* Torque : 2.5 kgf.cm(Max)
- (Measurement gauge : torque meter)
- Notes : 1. Screw plated through the method of non-electrolytic nickel plating is preferred to reduce possibility that results in vertical and/or horizontal line defect due to the conductive particles from screw surface.



### 6. Reliability

Environment test condition

No.	Test Item	Conditions					
1	High temperature storage test	Ta= 60°C, 240h					
2	Low temperature storage test	Ta= -20°C, 240h					
3	High temperature operation test	Ta= 50°C, 50%RH, 240h					
4	Low temperature operation test	Ta= 0°C, 240h					
5	Vibration test (non-operating)	Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min 3 axis, 1hour/axis					
6	Shock test (non-operating)	Half sine wave, 180G, 2ms one shock of each six faces(I.e. run 180G 6ms for all six faces)					
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr					

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.



#### 7. International Standards

#### 7-1. Safety

a) UL 60950-1:2003, First Edition, Underwriters Laboratories, Inc., Standard for Safety of Information Technology Equipment.
b) CAN/CSA C22.2, No. 60950-1-03 1<sup>st</sup> Ed. April 1, 2003, Canadian Standards Association, Standard for Safety of Information Technology Equipment.
c) EN 60950-1:2001, First Edition, European Committee for Electrotechnical Standardization(CENELEC) European Standard for Safety of Information Technology Equipment.

#### 7-2. EMC

a) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHZ to 40GHz. "American National Standards Institute(ANSI), 1992

b) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special Committee on Radio Interference.

c) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization.(CENELEC), 1998 (Including A1: 2000)



### 8. Packing

### 8-1. Designation of Lot Mark

a) Lot Mark



A,B,C : SIZE(INCH)
E : MONTH

D : YEAR F ~ M : SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

#### 2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	А	В	С

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module. This is subject to change without prior notice.

#### 8-2. Packing Form

- a) Package quantity in one box : 20 pcs
- b) Box Size : 441mm × 373mm × 348mm



### 9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

### 9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental
- to the polarizer.)(7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

### 9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :  $V=\pm 200 \text{mV}(\text{Over and under shoot voltage})$
- (2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.) And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.



#### 9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

### 9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

### 9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.It is recommended that they be stored in the container in which they were shipped.

### 9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.

Please carefully peel off the protection film without rubbing it against the polarizer.

- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.



### APPENDIX A. Enhanced Extended Display Identification Data (EEDID<sup>™</sup>) 1/3

## LP154WX4-TLA4 E-EDID DATA (ver0.0)

2007,05,10

Bytest         Evenue         Value         <	Byte#	Byte#		Va	lue	Value	
0         00         Header         0 </th <th></th> <th></th> <th>Field Name and Comments</th> <th>_</th> <th></th> <th></th> <th></th>			Field Name and Comments	_			
1       01       F			Header	-			
2         02         F		_		Ē	F		
3       03       F F       F IIII IIIII       Header         4       04       F F       F IIII IIIII       Header         5       05       F F       F IIII IIIII       Header         6       06       F F       F IIII IIIII       F         7       07       0       0       0000 0001       0         9       08       EISA manufacturer code = LPL       3       2       0011 0010         10       0A       Product code = 0106       0       1       0000 0001         11       06       (Hex, LSB first)       0       6       0000 0000         12       0C       32-bit serial number       0       0       0000 0000         13       0D       0       0000 0000       Product ID         14       0E       0       0000 0001       DIO bersion         15       0F       Week of manufacture = 2007       1       1       0000 0001         16       10       Week of manufacture = 2007       1       1       0000 0001       Revision         21       15       Max H image size(m) = 3312m(32)       2       1       0010 0001       Revision         22       16							
4         04         F         F         1111         1111           5         05         F         F         1111         1111           6         06         F         F         1111         1111           7         07         6         0         0000000         0000000           8         08         EISA manufacturer code = LPL         3         2         0         0         0         0000000         0000         0000           10         0.A         Product code = 0106         0         1         0000							Heeder
5         05         F         F         1111         1111           7         07         F         F         1111         1111           7         07         F         F         1111         1111           7         07         F         F         1111         1111           8         08         EISA manufacturer code = LPL         3         2         0000         0000           10         0.4         Product code = 0106         0         1         000         0000         0000           11         0.6         (Hex_LSB first)         0         0         0000         0000           12         0.2         32-bit serial number         0         0         0000         0000           14         0.6         0         0         0000         0000         0000           15         0.7         Manufacture = 2007         1         1         0         1         0000         0001         BDID Version           18         12         EDID Revision # = 3         0         1         00000         Display           21         15         Max H image size(m) = 3312am(33)         2         1         1<		_					neauer
7       07       07       0       000       000         8       08       EISA manufacturer code = LPL       9       2       000       100       000       000       100       000       000       100       000       000       100       0000       000       100       0000 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
7       07       07       0       000       000         8       08       EISA manufacturer code = LPL       9       2       000       100       000       000       100       000       000       100       000       000       100       0000       000       100       0000 <td></td> <td>_</td> <td></td> <td></td> <td>F</td> <td></td> <td></td>		_			F		
8         08         EISA manufacturer code = LPL         9         0         2         011         010         0         C         00000         0000		-					
9         09         00         C         00         00         Product code = 0106         0         1         0000 0001           11         00         (Hex, LSB first)         0         0         0         0         0000 0000           12         00         22-bit serial number         0         0         0         0000 0000         Product ID           13         00         0         0         0         0         0         0000 0000           14         0E         0         0         0         0         0         0000 0000           16         10         Week of manufacture         2007         1         1         0         1         0000 0001         EDID Version           18         12         EDID Revision # = 3         0         1         0         0         0000 0000         EDID Version           20         14         Video input definition = Digital <i>Up</i> non TMDS CRGB         8         0         1000 0001         EDID Version           21         15         Max H image size(m) = 32(m(21)         1         5         0011 0101         EDID Version           22         16         Max Y image size(m) = 32(m(33)         2         1 <td></td> <td>_</td> <td>EISA manufacturer code = LPI</td> <td>_</td> <td></td> <td></td> <td></td>		_	EISA manufacturer code = LPI	_			
10         0.A         Product code = 0106         0         1         000         000         0110           11         08         (Hex, LSB first)         0         0         6         0000 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<>							
11       08       (Hex, LSB first)       0       6       0000 0000       Vender/         12       0C       32-bit serial number       0       0       0       0000 0000       Product ID         14       0E       0       0       0000 0000       0       0       0000 0000       Product ID         14       0E       0       0       0       0       0       0000 0000       Product ID         15       0F       0 </td <td></td> <td></td> <td>Product code = 0106</td> <td></td> <td>-</td> <td></td> <td></td>			Product code = 0106		-		
12       0C       32-bit serial number       0       0       0000 0000       Product ID         13       0D       0       0000 0000       0       0000 0000       Product ID         14       0E       0       0       0000 0000       0       0       0000 0000         15       0F       0       0       0000 0000       0       0       0000 0000         16       10       Week of manufacture = 2007       1       1       0000 0001       EVID Version         17       11       Year of manufacture = 2007       1       1       0000 0001       Revision         20       14       Video input definition = Digital Vp.non TMDS CRGB       8       0       1000 0001       Display         21       15       Max V image size(m) = 207m(21)       1       5       0000 1010       Display         22       16       Max V image size(m) = 207m(21)       1       5       0000 1010       Display       Parameter         23       17       Display gamma = 220       7       8       0111 1001       Display       Parameter         24       18       Fed/Green low Bits       4       0       1000 0001       Display       Display <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<>							
13       00       0       00000000       Product ID         14       0E       0       00000000       00000000         15       0F       Week of manufacture       0       0       00000000         16       10       Week of manufacture = 2007       1       1       0000 0000         17       11       Year of manufacture = 2007       1       1       0000 0001         18       12       EDID Structure version # = 3       0       3       0000 0001         20       14       Video input definition = Digital Vp.non TMDS CRGB       8       0       1000 0001         21       15       Max H image size(m) = 3312m(33)       2       1       001 001       000 1010         22       16       Max V image size(m) = 207m(21)       1       5       000 1010       Parameter         23       17       Display gamma = 220       7       8       0111 1001       Parameter         24       18       Reducreen low Bits       4       0       0000 0000       9       9       1001 1001         25       19       Redu X       Rx = 0600       9       9       1001 1001       Color         26       1A       Blue/White				_			Vandari
14       0E       0       0       0000 0000         15       0F       0       0       0000 0000         16       10       Week of manufacture = 2007       1       1       0010 0001         18       12       EDID Structure version # = 1       0       1       0000 0001       Revision         19       13       EDID Revision # = 3       0       0       0000 0001       Revision         20       14       Video input definition = Digital l/p.non TMDS CRGB       8       0       1000 0000         21       15       Max H image size(m) = 3312m(33)       2       1       0010 0000         22       16       Max V image size(m) = 3212m(33)       2       1       0010 0000         23       17       Display gamma = 200       7       8       1111 10001         25       19       Red/Green low Bits       4       0       0100 00001         28       1C       Red Y       R = 0,600       9       9       1001 1001         28       1C       Red Y       R = 0,620       5       3       0101 0101         29       1D       Green X       G x = 0,325       5       3       0101 01001				· · · · · · ·			-
15         0F         0					·····		Product ID
16       10       Week of manufacture       0       0       000000000000000000000000000000000000				· · · · ·			
17       11       Year of manufacture = 2007       1       1       1       0001       0001         18       12       EDID Structure version # = 1       0       3       0000       0001       BEDID Version         20       14       Video input definition = Digital //p.non TMDS CRGB       8       0       10000       0000       Display         21       15       Max H image size(m) = 3312cm(33)       2       1       0010       0001       Display         22       16       Max V image size(m) = 207cm(21)       1       5       0010       0001       Display         23       17       Display gamma = 220       7       8       0111       0010       0000         24       18       Feature support/DPMS) = Active off, RGB Color       0       A       0000       0001         25       19       Red/Green low Bits       8       3       1011       0010       0001         26       1A       Blue/White Low Bits       4       0       1000       1001       Color         29       1D       Green X       GX = 0,325       5       3       1010       1011       Color         30       1E       Green X       GX = 0,				-			
18       12       EDID Structure version # = 1       0       1       0000 0001       EDID Version         19       13       EDID Revision # = 3       0       1       0000 0001       Revision         20       14       Video input definition = Digital I/p.non TMDS CRGB       8       0       1000 0001       Display         21       15       Max H image size(m) = 3312m(33)       2       1       00110 0001       Display         22       16       Max V image size(m) = 20,7m(21)       1       5       0011 1000       Display         23       17       Display gamma = 220       7       8       01111 1000       Parameter         24       18       Feature support(DPMS) = Active off, RGB Color       0       A 0000 1001       Display         25       19       Red/Green low Bits       8       1011 1001       Color         25       10       Red X       Rx = 0,600       9       9       1001 1001         28       1C       Red Y       Ry = 0,351       5       9       0101 1001       Color         29       1D       Green X       GX = 0,325       5       10101 0101       Calor         33       21       White X       Wx =		10	Week of manufacture	0	0	0000 0000	
19       13       EDID Revision # = 3       0       3       0000       0011       Revision         20       14       Video input definition = Digital I/p.nor TMDS CRGB       8       0       1000       0001       Display         21       15       Max H image size(am) = 3312cm(33)       2       1       0010       0001       Display         22       16       Max V image size(am) = 20.7cm(21)       1       5       0001       0001       Display         23       17       Display gamma = 220       7       8       0111       0000       010         24       18       Feature support(DPMS) = Active off, RGB Color       0       A       0000       010         25       19       Red/Green low Bits       8       3       1011       0001       0000         26       1A       Blue/White Low Bits       4       0       0       0       0000       1001         28       1D       Green X       Gy = 0,354       8       D       10001       101       Color         33       21       White X       Wx = 0,313       5       0       0       0       0000       0000       000         36       24 <td>17</td> <td>11</td> <td>Year of manufacture = 2007</td> <td>1</td> <td>1</td> <td>0001 0001</td> <td></td>	17	11	Year of manufacture = 2007	1	1	0001 0001	
20         14         Video input definition = Digital //p.non TMDS CRGB         8         0         1000 0000           21         15         Max H image size(cm) = 3312cm(33)         2         1         0.010 0001         Parameter           22         16         Max V image size(cm) = 20,7m(21)         1         5         0.0001 0101         Parameter           23         17         Display gamma = 220         7         8         0.111 1000         Parameter           24         18         Feature support(DPMS) = Active off, RGB Color         0         A         0000 1001           25         19         Red/Green low Bits         4         0         0.000 0000           26         1A         Blue/White Low Bits         4         0         0.000 0001           28         1C         Red X         Rx = 0,500         9         9         1001 1001           28         1D         Green Y         Gy = 0,351         5         3         0.100 0111           29         1D         Green Y         Gy = 0,145         2         5         0.010 0101           31         1F         Blue Y         By = 0,145         2         5         0.000 00000           34         <	18	12	EDID Structure version # = 1	0	1		EDID Version,
20         14         Video input definition = Digital //p.non TMDS CRGB         8         0         1000 0000           21         15         Max H image size(am) = 3312am(33)         2         1         0.010 0001         Parameter           22         16         Max V image size(am) = 20,7m(21)         1         5         0.000 1010         Parameter           23         17         Display gamma = 220         7         8         0.111 1000         Parameter           24         18         Feature support(DPMS) = Active off, RGB Color         0         A         0.000 1010           25         19         Red/Green low Bits         4         0         0.000 0000           26         1A         Blue/White Low Bits         4         0         0.000 0001           28         1C         Red X         Rx = 0,500         9         9         1001 1001           28         1D         Green Y         Gy = 0,354         2         7         0010 0101           30         1E         Green Y         Gy = 0,145         2         5         0.010 0100           34         22         White X         Wy = 0,329         5         4         0.000 00000           35         <	19	13		0	3	0000 0011	Revision
22       16       Max Y image size(m) = 207cm(21)       1       5       0001 0101         23       17       Display gamma = 220       7       8       0111 1000         24       18       Feature supportDPMS) = Active off, RGB Color       0       A       0000 1010         25       19       Red/Green low Bits       8       3       1011 0011         26       1A       Blue/White Low Bits       4       0       0100 0000         27       18       Red X       Rx = 0,600       9       9       1001 1001         28       1C       Red Y       Ry = 0,351       5       9       0101 0011         29       1D       Green X       GX = 0,325       5       0       0100 0100         30       1E       Green X       BX = 0,154       2       7       0010 0101         32       20       Blue Y       By = 0,313       5       0       0100 0000         34       22       White X       WX = 0,313       5       0       000 0000         35       23       Established Timing I       0       0       0000 0000       0         35       24       Established Timing I dentification 1 was not used	20	14	Video input definition = Digital I/p,non TMDS CRGB	8	0		
22       16       Max Y image size(m) = 207cm(21)       1       5       0001 0101         23       17       Display gamma = 220       7       8       0111 1000         24       18       Feature supportDPMS) = Active off, RGB Color       0       A       0000 1010         25       19       Red/Green low Bits       8       3       1011 0011         26       1A       Blue/White Low Bits       4       0       0100 0000         27       18       Red X       Rx = 0,600       9       9       1001 1001         28       1C       Red Y       Ry = 0,351       5       9       0101 0011         29       1D       Green X       GX = 0,325       5       0       0100 0100         30       1E       Green X       BX = 0,154       2       7       0010 0101         32       20       Blue Y       By = 0,313       5       0       0100 0000         34       22       White X       WX = 0,313       5       0       000 0000         35       23       Established Timing I       0       0       0000 0000       0         35       24       Established Timing I dentification 1 was not used	21	15	Max H image size(cm) = 33,12cm(33)	2	1	0010 0001	Display
24         18         Feature support(DPMS) = Active off, RGB Color         0         A         0000 1010           25         19         Red/Green low Bits         B         3         1011 0011           26         1A         Blue/White Low Bits         4         0         0100 0000           27         1B         Red X         Rx = 0,600         9         9         1001 1001           28         1C         Red Y         Ry = 0,351         5         9         0100 1001           29         1D         Green X         Gx = 0,325         5         3         0100 1011           30         1E         Green Y         Gy = 0,554         8         D         10001 1011           32         20         Blue Y         By = 0,145         2         5         0010 1010           33         21         White X         Wx = 0,313         0         0         00000 0000           34         22         White Y         Wy = 0,329         5         4         0101 0000           35         23         Established Timing I         0         0         00000 0000           36         24         Established Timing Identification 1 was not used         0	22	16		1	5	0001 0101	Parameter
25       19       Red/Green low Bits       B       3       1011 0011         26       1A       Blue/White Low Bits       4       0       0100 0000         27       1B       Red X       Rx = 0,600       9       9       1001 1001         28       1C       Red Y       Ry = 0,351       5       9       0101 1001       Color         28       1D       Green X       GX = 0,325       5       3       0100 0001       Color         30       1E       Green Y       GY = 0,554       8       D       1000 1001       Characteristic         31       1F       Blue X       Bx = 0,154       2       5       0 0101 0000       Characteristic         33       21       White X       Wx = 0,313       5       0 0010 0000       Established         36       24       Established Timing I       0       0       0 0000 0000       Established         37       25       Manufacturer's Timings       0       0       0 0000 0000       Established         37       25       Manufacturer's Timing I       0       0       0 0000 0001       0       0 0000 0001         38       26       Standard Timing Identification 1 w	23	17	Display gamma = 2,20	7	8	0111 1000	
26         1A         Blue/White Low Bits         4         0         0         0         00000           27         1B         Red X         Rx = 0,600         9         9         1001         1001           28         1C         Red Y         By = 0,351         5         3         0101         0011           29         1D         Green X         Gx = 0,325         5         3         0101         0011           30         1E         Green Y         Gy = 0,9554         8         D         1000         1101           31         1F         Blue X         Bx = 0,154         2         7         0101         010           32         20         Blue Y         By = 0,145         2         5         0	24	18	Feature support(DPMS) = Active off, RGB Color	0	Α	0000 1010	
27         18         Red X         Rx = 0,600         9         9         1001 1001           28         1C         Red Y         Ry = 0,351         5         9         0101 1001           29         1D         Green X         Gx = 0,325         5         3         0101 0011           30         1E         Green Y         Gy = 0,554         8         D         1000 1101         Characteristic           31         1F         Blue X         Bx = 0,154         2         7         0010 0101         O         Characteristic           33         21         White X         Wx = 0,329         5         4         0101 0000         Fatablished Timing I         0         0         00000 0000         Established           36         24         Established Timing I         0         0         0         00000 0000         Timings           37         25         Manufacturer's Timing Identification 1 was not used         0         1         0000 0001         1         0000 0001           41         29         Standard Timing Identification 2 was not used         0         1         0000 0001         1         0000 0001           43         28         Standard Timing Identification	25	19	Red/Green low Bits	В	3	1011 0011	
28         1C         Red Y         Ry = 0,351         5         9         0.101.1001           29         1D         Green X         GX = 0,325         5         3         0.101.0011         Color           30         1E         Green Y         GY = 0,554         8         D         1000.1101         Characteristic           31         1F         Blue X         BY = 0,154         2         5         0.010.0111         Characteristic           33         21         White X         WX = 0,313         5         0         0.0000.0000         Established Timing I         0         0         0.0000.0000         Timings           36         24         Established Timing I         0         0         0.0000.0000         Timings           37         25         Manufacturer's Timings         0         0         0.0000.0001         Timings           38         26         Standard Timing Identification 1 was not used         0         1         0.000.0001         Timings           41         29         Standard Timing Identification 2 was not used         0         1         0.000.0001           43         28         Standard Timing Identification 3 was not used         0         1         <	26	1A		4	0	0100 0000	
28         1C         Red Y         Ry = 0,351         5         9         0.101.1001           29         1D         Green X         GX = 0,325         5         3         0.101.0011         Color           30         1E         Green Y         GY = 0,554         8         D         1000.1101         Characteristic           31         1F         Blue X         BY = 0,154         2         5         0.010.0111         Characteristic           33         21         White X         WX = 0,313         5         0         0.0000.0000         Established Timing I         0         0         0.0000.0000         Timings           36         24         Established Timing I         0         0         0.0000.0000         Timings           37         25         Manufacturer's Timings         0         0         0.0000.0001         Timings           38         26         Standard Timing Identification 1 was not used         0         1         0.000.0001         Timings           41         29         Standard Timing Identification 2 was not used         0         1         0.000.0001           43         28         Standard Timing Identification 3 was not used         0         1         <	27	1B	Red X Rx = 0,600	9	9	1001 1001	
29       1D       Green ×       GX = 0.325       5       3       0.1001.0011       Color         30       1E       Green Y       GY = 0.554       8       D       1000.1101       Characteristic         31       11F       Blue X       BX = 0.154       2       7       0010.0111       Characteristic         32       20       Blue Y       By = 0.145       2       5       0.000.0000       Featblished         33       21       White X       Wx = 0.313       5       0       0.000.0000       Featblished         34       22       White Y       Wy = 0.329       5       4       0.000.0000       Featblished         35       23       Established Timing I       0       0       0.000.0000       Featblished         36       24       Established Timing Identification 1 was not used       0       1       0000.0001       Featblished         37       25       Manufacturer's Timings       0       0       0.000.0001       1       1       0000.0001         38       26       Standard Timing Identification 1 was not used       0       1       0000.0001       1       0000.0001         41       29       Standard Timing Identif	28	1C	Red Y Ry = 0,351	5		0101 1001	
30         1E         Green Y         Gy = 0,554         8         D         1000 1101         Characteristic           31         1F         Blue X         Bx = 0,154         2         7         0010 0111           32         20         Blue Y         By = 0,145         2         5         0010 1000           33         21         White X         Wx = 0,313         5         0         0101 0000           34         22         White Y         Wy = 0,329         5         4         0101 0100           35         23         Established Timing I         0         0         0000 0000         Timings           37         25         Manufacturer's Timings         0         0         0000 0001         Timings           38         26         Standard Timing Identification 1 was not used         0         1         0000 0001         1         0000 0001           41         29         Standard Timing Identification 2 was not used         0         1         0000 0001         1         0000 0001           42         2A         Standard Timing Identification 3 was not used         0         1         0000 0001         1         0000 0001           43         2B	29	1D	Green X Gx = 0,325	5	3		
31       1F       Blue X       Bx = 0.154       2       7       0010 0111         32       20       Blue Y       By = 0.145       2       5       0010 0001         33       21       White X       Wx = 0.313       5       0       0101 0000         34       22       White Y       Wy = 0.329       5       4       0101 0000         35       23       Established Timing I       0       0       0000 0000       Established         36       24       Established Timing I       0       0       0000 0000       Timings         37       25       Manufacturer's Timings       0       0       0       0000 0001       Timings         38       26       Standard Timing Identification 1 was not used       0       1       0000 0001       Timings         40       28       Standard Timing Identification 2 was not used       0       1       0000 0001       Timing Identification 3 was not used       0       1       0000 0001         41       29       Standard Timing Identification 3 was not used       0       1       0000 0001       Timing Identification 3 was not used       1       0000 0001         42       ZA       Standard Timing Identification 5 w	30	1E		8	D	1000 1101	Characteristic
33       21       White X       Wx = 0.313       5       0       0.101 0000         34       22       White Y       Wy = 0.329       5       4       0.101 0100         35       23       Established Timing I       0       0       0.000 0000       Established         36       24       Established Timing II       0       0       0.000 0000       Timings         37       25       Manufacturer's Timing Identification 1 was not used       0       1       0000 0000       Timings         39       27       Standard Timing Identification 1 was not used       0       1       0000 0000       Timings         40       28       Standard Timing Identification 2 was not used       0       1       0000 0001         41       29       Standard Timing Identification 3 was not used       0       1       0000 0001         42       2A       Standard Timing Identification 4 was not used       0       1       0000 0001         44       2C       Standard Timing Identification 5 was not used       0       1       0000 0001         45       2D       Standard Timing Identification 5 was not used       0       1       0000 0001         46       2E       Standard Timing Ident	31	1F		2	7	0010 0111	
33       21       White X       Wx = 0.313       5       0       0.101 0000         34       22       White Y       Wy = 0.329       5       4       0.101 0100         35       23       Established Timing I       0       0       0.000 0000       Established         36       24       Established Timing II       0       0       0.000 0000       Timings         37       25       Manufacturer's Timing Identification 1 was not used       0       1       0000 0000       Timings         39       27       Standard Timing Identification 1 was not used       0       1       0000 0000       Timings         40       28       Standard Timing Identification 2 was not used       0       1       0000 0001         41       29       Standard Timing Identification 3 was not used       0       1       0000 0001         42       2A       Standard Timing Identification 4 was not used       0       1       0000 0001         44       2C       Standard Timing Identification 5 was not used       0       1       0000 0001         45       2D       Standard Timing Identification 5 was not used       0       1       0000 0001         46       2E       Standard Timing Ident	32	20	Blue Y By = Q145	2	5	0010 0101	
34       22       White Y       Wy = 0,329       5       4       0 101 0100         35       23       Established Timing I       0       0       00000 0000       Established         36       24       Established Timing II       0       0       00000 0000       Established         37       25       Manufacturer's Timings       0       0       0       00000 0000         38       26       Standard Timing Identification 1 was not used       0       1       00000 0001         39       27       Standard Timing Identification 2 was not used       0       1       00000 0001         40       28       Standard Timing Identification 2 was not used       0       1       0000 0001         41       29       Standard Timing Identification 3 was not used       0       1       0000 0001         42       2A       Standard Timing Identification 3 was not used       0       1       0000 0001         43       28       Standard Timing Identification 4 was not used       0       1       0000 0001         44       2C       Standard Timing Identification 5 was not used       0       1       0000 0001         45       2D       Standard Timing Identification 5 was not used	33	21	White X Wx = 0,313	5		0101 0000	
36       24       Established Timing II       0       0       00       00000000         37       25       Manufacturer's Timings       0       0       00000000         38       26       Standard Timing Identification 1 was not used       0       1       000000001         39       27       Standard Timing Identification 1 was not used       0       1       000000001         40       28       Standard Timing Identification 2 was not used       0       1       000000001         41       29       Standard Timing Identification 2 was not used       0       1       000000001         42       2A       Standard Timing Identification 3 was not used       0       1       000000001         43       2B       Standard Timing Identification 4 was not used       0       1       000000001         44       2C       Standard Timing Identification 5 was not used       0       1       000000001         45       2D       Standard Timing Identification 5 was not used       0       1       0000 0001         46       2E       Standard Timing Identification 5 was not used       0       1       0000 0001         48       30       Standard Timing Identification 6 was not used       0       1	34	22			4	0101 0100	
37         25         Manufacturer's Timings         0         0         0         00000000           38         26         Standard Timing Identification 1 was not used         0         1         000000001           39         27         Standard Timing Identification 1 was not used         0         1         000000001           40         28         Standard Timing Identification 2 was not used         0         1         000000001           41         29         Standard Timing Identification 2 was not used         0         1         000000001           42         2A         Standard Timing Identification 3 was not used         0         1         000000001           43         28         Standard Timing Identification 4 was not used         0         1         000000001           44         2C         Standard Timing Identification 5 was not used         0         1         000000001           45         2D         Standard Timing Identification 5 was not used         0         1         000000001           46         2E         Standard Timing Identification 6 was not used         0         1         000000001           48         30         Standard Timing Identification 7 was not used         0         1         00000 0001	35	23	Established Timing I	0	0	0000 0000	Established
3826Standard Timing Identification 1 was not used010000 00013927Standard Timing Identification 1 was not used010000 00014028Standard Timing Identification 2 was not used010000 00014129Standard Timing Identification 2 was not used010000 0001422AStandard Timing Identification 3 was not used010000 0001432BStandard Timing Identification 4 was not used010000 0001442CStandard Timing Identification 4 was not used010000 0001452DStandard Timing Identification 5 was not used010000 0001462EStandard Timing Identification 5 was not used010000 0001472FStandard Timing Identification 6 was not used010000 00014830Standard Timing Identification 7 was not used010000 00015032Standard Timing Identification 7 was not used010000 00015133Standard Timing Identification 7 was not used010000 00015234Standard Timing Identification 8 was not used010000 0001	36	24		TO	0		
3826Standard Timing Identification 1 was not used010000 00013927Standard Timing Identification 1 was not used010000 00014028Standard Timing Identification 2 was not used010000 00014129Standard Timing Identification 2 was not used010000 0001422AStandard Timing Identification 3 was not used010000 0001432BStandard Timing Identification 4 was not used010000 0001442CStandard Timing Identification 4 was not used010000 0001452DStandard Timing Identification 5 was not used010000 0001462EStandard Timing Identification 5 was not used010000 0001472FStandard Timing Identification 6 was not used010000 00014830Standard Timing Identification 7 was not used010000 00015032Standard Timing Identification 7 was not used010000 00015133Standard Timing Identification 7 was not used010000 00015234Standard Timing Identification 8 was not used010000 0001	37	25	Manufacturer's Timings	0	O O	0000 0000	-
3927Standard Timing Identification 1 was not used010000 00014028Standard Timing Identification 2 was not used010000 00014129Standard Timing Identification 2 was not used010000 0001422AStandard Timing Identification 3 was not used010000 0001432BStandard Timing Identification 3 was not used010000 0001442CStandard Timing Identification 4 was not used010000 0001452DStandard Timing Identification 5 was not used010000 0001462EStandard Timing Identification 5 was not used010000 0001472FStandard Timing Identification 6 was not used010000 00014830Standard Timing Identification 6 was not used010000 00015032Standard Timing Identification 7 was not used010000 00015133Standard Timing Identification 7 was not used010000 00015234Standard Timing Identification 8 was not used010000 0001			×	-			
4028Standard Timing Identification 2 was not used010000 00014129Standard Timing Identification 2 was not used010000 0001422AStandard Timing Identification 3 was not used010000 0001432BStandard Timing Identification 3 was not used010000 0001442CStandard Timing Identification 4 was not used010000 0001452DStandard Timing Identification 5 was not used010000 0001462EStandard Timing Identification 5 was not used010000 0001472FStandard Timing Identification 6 was not used010000 00014830Standard Timing Identification 6 was not used010000 00014931Standard Timing Identification 7 was not used010000 00015032Standard Timing Identification 7 was not used010000 00015133Standard Timing Identification 7 was not used010000 00015234Standard Timing Identification 8 was not used010000 0001				-	-		
4129Standard Timing Identification 2 was not used010000 0001422AStandard Timing Identification 3 was not used010000 0001432BStandard Timing Identification 3 was not used010000 0001442CStandard Timing Identification 4 was not used010000 0001452DStandard Timing Identification 5 was not used010000 0001462EStandard Timing Identification 5 was not used010000 0001472FStandard Timing Identification 6 was not used010000 00014830Standard Timing Identification 6 was not used010000 00014931Standard Timing Identification 7 was not used010000 00015032Standard Timing Identification 7 was not used010000 00015133Standard Timing Identification 8 was not used010000 00015234Standard Timing Identification 8 was not used010000 0001				-			
422AStandard Timing Identification 3 was not used010000 0001432BStandard Timing Identification 3 was not used010000 0001442CStandard Timing Identification 4 was not used010000 0001452DStandard Timing Identification 4 was not used010000 0001462EStandard Timing Identification 5 was not used010000 0001472FStandard Timing Identification 6 was not used010000 00014830Standard Timing Identification 6 was not used010000 00014931Standard Timing Identification 7 was not used010000 00015032Standard Timing Identification 7 was not used010000 00015133Standard Timing Identification 8 was not used010000 00015234Standard Timing Identification 8 was not used010000 0001				-			
4328Standard Timing Identification 3 was not used010000 0001442CStandard Timing Identification 4 was not used010000 0001452DStandard Timing Identification 4 was not used010000 0001462EStandard Timing Identification 5 was not used010000 0001472FStandard Timing Identification 5 was not used010000 00014830Standard Timing Identification 6 was not used010000 00014931Standard Timing Identification 7 was not used010000 00015032Standard Timing Identification 7 was not used010000 00015133Standard Timing Identification 8 was not used010000 00015234Standard Timing Identification 8 was not used010000 0001				-			
442CStandard Timing Identification 4 was not used010000 0001Standard Timing Identification 4 was not used010000 0001452DStandard Timing Identification 4 was not used010000 00011Timing ID462EStandard Timing Identification 5 was not used010000 00011Timing ID472FStandard Timing Identification 5 was not used010000 000110000 00014830Standard Timing Identification 6 was not used010000 000110000 00014931Standard Timing Identification 7 was not used010000 000115032Standard Timing Identification 7 was not used010000 00015133Standard Timing Identification 8 was not used010000 00015234Standard Timing Identification 8 was not used010000 0001							
452DStandard Timing Identification 4 was not used010000 0001462EStandard Timing Identification 5 was not used010000 0001472FStandard Timing Identification 5 was not used010000 00014830Standard Timing Identification 6 was not used010000 00014931Standard Timing Identification 6 was not used010000 00015032Standard Timing Identification 7 was not used010000 00015133Standard Timing Identification 8 was not used010000 00015234Standard Timing Identification 8 was not used010000 0001			-	-			<b></b>
46         2E         Standard Timing Identification 5 was not used         0         1         0000 0001           47         2F         Standard Timing Identification 5 was not used         0         1         0000 0001           48         30         Standard Timing Identification 6 was not used         0         1         0000 0001           49         31         Standard Timing Identification 6 was not used         0         1         0000 0001           50         32         Standard Timing Identification 7 was not used         0         1         0000 0001           51         33         Standard Timing Identification 7 was not used         0         1         0000 0001           52         34         Standard Timing Identification 8 was not used         0         1         0000 0001							
47         2F         Standard Timing Identification 5 was not used         0         1         0000 0001           48         30         Standard Timing Identification 6 was not used         0         1         0000 0001           49         31         Standard Timing Identification 6 was not used         0         1         0000 0001           50         32         Standard Timing Identification 7 was not used         0         1         0000 0001           51         33         Standard Timing Identification 7 was not used         0         1         0000 0001           52         34         Standard Timing Identification 8 was not used         0         1         0000 0001			-		-		Timing ID
48         30         Standard Timing Identification 6 was not used         0         1         0000 0001           49         31         Standard Timing Identification 6 was not used         0         1         0000 0001           50         32         Standard Timing Identification 7 was not used         0         1         0000 0001           51         33         Standard Timing Identification 7 was not used         0         1         0000 0001           52         34         Standard Timing Identification 8 was not used         0         1         0000 0001			· ·	-	1		
49         31         Standard Timing Identification 6 was not used         0         1         0000 0001           50         32         Standard Timing Identification 7 was not used         0         1         0000 0001           51         33         Standard Timing Identification 7 was not used         0         1         0000 0001           52         34         Standard Timing Identification 8 was not used         0         1         0000 0001	47	2F		0	1	0000 0001	
50         32         Standard Timing Identification 7 was not used         0         1         0000 0001           51         33         Standard Timing Identification 7 was not used         0         1         0000 0001           52         34         Standard Timing Identification 8 was not used         0         1         0000 0001	48	30	Standard Timing Identification 6 was not used	0	1	0000 0001	
50         32         Standard Timing Identification 7 was not used         0         1         0000 0001           51         33         Standard Timing Identification 7 was not used         0         1         0000 0001           52         34         Standard Timing Identification 8 was not used         0         1         0000 0001	49	31	Standard Timing Identification 6 was not used	0	1	0000 0001	
5133Standard Timing Identification 7 was not used010000 00015234Standard Timing Identification 8 was not used010000 0001				-			
52 34 Standard Timing Identification 8 was not used 0 1 0000 0001			*	-			
				-			
			-		4		
	- 35	30	Istandard mining identification 6 was hot 0sed	0		0000 0001	

25 / 27



## APPENDIX A. Enhanced Extended Display Identification Data (EEDID<sup>™</sup>) 2/3

Byte#	Byte#		Va	lue	Value	
(decimal)		Field Name and Comments		EX)		
54	36	1280 × 800 @ 60Hz mode : pixel clock = 69,3MHz	1	2		
55	37	(Stored LSB first)	1		0001 1011	
56	38	Horizontal Active = 1280 pixels	O I	Ō	0000 0000	
57	39	Horizontal Blanking = 136 pixels			1000 1000	
58	ЗA	Horizontal Active : Horizontal Blanking = 1280 : 136			0101 0000	
59	3B	Vertical Autive - 200 lines			0010 0000	
60	3C	Vertical Blanking = 16 lines			0001 0000	
61	3D	Vertical Active : Vertical Blanking = 800 : 16			0011 0000	Timing
62	ЗE	Horizontal Sync, Offset = 48 pixels			0011 0000	Descriptor
63	3F	Horizontal Sync Pulse Width = 24 pixels			0001 1000	<b>\$</b> 1
64	40	Vertical Sync Offset = 3 lines, Sync Width = 6 lines			0011 0110	
65	41	Horizontal Vertical Sync Offset/Width upper 2bits = 0			0000 0000	
66	42	Horizontal Image Size = 331,2mm(331)			0100 1011	
67	43	Vertical Image Size = 207,0mm(207)	Ċ	F	1100 1111	
68	44	Horizontal & Vertical Image Size			0001 0000	
69	45	Horizontal Border = 0			0000 0000	
70	46	Vertical Border = 0			0000 0000	
70	40	Non-Interlaced, Normal display, no stereo, Digital separate sync, H/V pol negatives			0001 1001	
72	47	Detailed Timing Descriptor #2			0000 0000	
73	49				0000 0000	
74	43 4A				0000 0000	
75	4B				0000 0000	
76	4C		Ň	ŏ	0000 0000	
77	4D		Ō	Ō	0000 0000	
78	4E				0000 0000	Detailed
79	4F				0000 0000	Timing
80	50				0000 0000	Description
81	51		0	0	0000 0000	#2
82	52				0000 0000	
83	53				0000 0000	
84	55				0000 0000	
85	55				0000 0000	
86	56				0000 0000	
87	57				0000 0000	
88	58				0000 0000	
89	59	Detailed Timine Description #0			0000 0000	
90 91	5A 5B	Detailed Timing Descriptor #3			0000 0000	
91	58 50				0000 0000	
93	5D		F	F	1111 1110	
94	5E		r'm	'n	1111 1110 0000 0000	
95	5F	L	4	č	0100 1100	
96	60	G	4	7	0100 0111	Detailed
97	61	P	5	Ö		Timing
98	62	h	· · · · · · · ·	8		Description
99	63	I	6	9	0110 1001	#3
100	64	<u> </u>	6	С	0110 1100	
101	65	i	6	9	0110 1001	
102	66	P	7	0	0111 0000	
103	67	8	7	3	0111 0011	
104	68		4	C	0100 1100	
105	69	C	4	3	0100 0011	
106	6A	D	4	4	0100 0100	
107	6B	LF	0	A	0000 1010	



## APPENDIX A. Enhanced Extended Display Identification Data (EEDID<sup>™</sup>) 3/3

Byte# (decimal)	Byte# (HEX)	Field Name and Comments	Va (HE	lue EX)	Value (binary)	
108	6C	Detailed Timing Descriptor #4	0	0	0000 0000	
109	6D		0	0	0000 0000	
110	6E		0	0	0000 0000	
111	6F		F	Е	1111 1110	
112	70		0	0	0000 0000	
113	71	Ĺ	4	С	0100 1100	
114	72	Р	5	0	0101 0000	Detailed
115	73	1	3	1	0011 0001	Timing
116	74	5	3	5	0011 0101	Description
117	75	4	3	4	0011 0100	#4
118	76	₩	5	7	0101 0111	
119	77	X	5	8	0101 1000	
120	78	4	3	4	0011 0100	
121	79	-	2	D	0010 1101	
122	7A	Т	5	4	0101 0100	
123	7B	L	4	С	0100 1100	
124	7C	A	4	1	0100 0001	
125	7D	4	3	4	0011 0100	
126	7E	Extension flag = 00	0	0	0000 0000	<u>Extension Flag</u>
127	7F	Checksum	Е	9	1110 1001	Checksum