



**Contents**

<b>1. Operating Precautions</b> .....	<b>4</b>
<b>2. General Description</b> .....	<b>5</b>
2.1 Display Characteristics.....	5
2.2 Optical Characteristics .....	6
<b>3. Functional Block Diagram</b> .....	<b>9</b>
<b>4. Absolute Maximum Ratings</b> .....	<b>10</b>
4.1 Absolute Ratings of TFT LCD Module .....	10
4.2 Absolute Ratings of Environment .....	10
<b>5. Electrical Characteristics</b> .....	<b>11</b>
5.1 TFT LCD Module .....	11
5.2 Backlight Unit.....	12
<b>6. Signal Characteristic</b> .....	<b>13</b>
6.1 Pixel Format Image .....	13
6.2 Signal Description .....	14
Note:1 In DE Mode pull low Pin 31 & 33.6.3 Scanning Direction.....	15
6.3 Scanning Direction.....	16
6.4 Interface Timing.....	17
6.5 Power ON/OFF Sequence.....	19
<b>7. Connector &amp; Pin Assignment</b> .....	<b>20</b>
7.1 TFT LCD Signal (CN1): LCD Connector .....	20
7.2 LED Backlight Unit (FPC): .....	20
<b>8. Reliability Test Criteria</b> .....	<b>21</b>
<b>9. Mechanical Characteristics</b> .....	<b>22</b>
9.1 LCM Front View.....	22
9.2 LCM Rear View .....	23
<b>10. Label and Packaging</b> .....	<b>24</b>
10.1 Shipping Label (on the rear side of TFT-LCD display).....	24
10.2 Carton Package .....	24
<b>11 Safety</b> .....	<b>25</b>
11.1 Sharp Edge Requirements.....	25
11.2 Materials .....	25
11.3 Capacitors.....	25
11.4 National Test Lab Requirement.....	25



Record of Revision

Version and Date	Page	Old description	New Description																																						
0.0 2010/07/30	All	First Edition																																							
0.1 2010/11/08	5 10	Storage Temp: -25 to 75	Storage Temp: -20 to 70																																						
	6	TBD White Luminance: Ir=80mA	<table border="1"> <thead> <tr> <th>Item</th> <th>Unit</th> <th>Conditions</th> <th>Min.</th> <th>Typ.</th> </tr> </thead> <tbody> <tr> <td>White Luminance</td> <td>[cd/m<sup>2</sup>]</td> <td>I<sub>v</sub>=60mA (center point)</td> <td>160</td> <td>200</td> </tr> <tr> <td>Uniformly</td> <td>%</td> <td>9 Points</td> <td>70</td> <td>75</td> </tr> <tr> <td>Contrast Ratio</td> <td></td> <td></td> <td>400</td> <td>500</td> </tr> <tr> <td rowspan="3">Viewing Angle</td> <td>[degree]</td> <td>Horizontal (Right)</td> <td>70</td> <td>80</td> </tr> <tr> <td>[degree]</td> <td>CR ≥ 10 (Left)</td> <td>70</td> <td>80</td> </tr> <tr> <td>[degree]</td> <td>Vertical (Upper)</td> <td>70</td> <td>80</td> </tr> <tr> <td></td> <td></td> <td>CR ≥ 10 (Lower)</td> <td>50</td> <td>60</td> </tr> </tbody> </table>	Item	Unit	Conditions	Min.	Typ.	White Luminance	[cd/m <sup>2</sup> ]	I <sub>v</sub> =60mA (center point)	160	200	Uniformly	%	9 Points	70	75	Contrast Ratio			400	500	Viewing Angle	[degree]	Horizontal (Right)	70	80	[degree]	CR ≥ 10 (Left)	70	80	[degree]	Vertical (Upper)	70	80			CR ≥ 10 (Lower)	50	60
Item	Unit	Conditions	Min.	Typ.																																					
White Luminance	[cd/m <sup>2</sup> ]	I <sub>v</sub> =60mA (center point)	160	200																																					
Uniformly	%	9 Points	70	75																																					
Contrast Ratio			400	500																																					
Viewing Angle	[degree]	Horizontal (Right)	70	80																																					
	[degree]	CR ≥ 10 (Left)	70	80																																					
	[degree]	Vertical (Upper)	70	80																																					
		CR ≥ 10 (Lower)	50	60																																					
	11	Rising time must be <=470us	Rising time must be >=470us																																						
	12	TBD	<table border="1"> <thead> <tr> <th>Symbol</th> <th>Parameter</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td>V<sub>LED</sub></td> <td>Input Voltage</td> <td>17.7</td> <td>19.5</td> <td>21.9</td> </tr> <tr> <td>I<sub>LED</sub></td> <td>Input Current</td> <td></td> <td>15</td> <td>20</td> </tr> </tbody> </table>	Symbol	Parameter	Min.	Typ.	Max.	V <sub>LED</sub>	Input Voltage	17.7	19.5	21.9	I <sub>LED</sub>	Input Current		15	20																							
Symbol	Parameter	Min.	Typ.	Max.																																					
V <sub>LED</sub>	Input Voltage	17.7	19.5	21.9																																					
I <sub>LED</sub>	Input Current		15	20																																					
	19	T11 min:1000	T11 min:500																																						
	22 23		Update Drawing																																						
0.2 2011/01/26	5	Operating -10 to 70 Typical Power Consumption:TBD Weight: TBD	Operating -20 to 70 Typical Power Consumption:1.7 Weight: 320																																						
	6	Color / Chromaticity Coordinates: TBD	<table border="1"> <tbody> <tr> <td>Red x</td> <td>0.537</td> <td>0.587</td> <td>0.637</td> </tr> <tr> <td>Red y</td> <td>0.297</td> <td>0.347</td> <td>0.397</td> </tr> <tr> <td>Green x</td> <td>0.269</td> <td>0.339</td> <td>0.389</td> </tr> <tr> <td>Green y</td> <td>0.524</td> <td>0.574</td> <td>0.624</td> </tr> <tr> <td>Blue x</td> <td>0.104</td> <td>0.154</td> <td>0.204</td> </tr> <tr> <td>Blue y</td> <td>0.067</td> <td>0.117</td> <td>0.167</td> </tr> </tbody> </table>	Red x	0.537	0.587	0.637	Red y	0.297	0.347	0.397	Green x	0.269	0.339	0.389	Green y	0.524	0.574	0.624	Blue x	0.104	0.154	0.204	Blue y	0.067	0.117	0.167														
Red x	0.537	0.587	0.637																																						
Red y	0.297	0.347	0.397																																						
Green x	0.269	0.339	0.389																																						
Green y	0.524	0.574	0.624																																						
Blue x	0.104	0.154	0.204																																						
Blue y	0.067	0.117	0.167																																						
0.3 2011/03/15	21	Low Temperature Operation: -10 <sup>0</sup> C 300hrs	Low Temperature Operation: -20 <sup>0</sup> C 300hrs																																						
	24	Max weight: TBD per carton	Max weight: 12kg per carton																																						
1.0 2011/04/29			Final Version 1.0																																						

## 1. Operating Precautions

- 1) Since front polarizer is easily damaged, please be cautious not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or soft cloth.
- 5) Since the panel is made of glass, it may be broken or cracked if dropped or bumped on hard surface.
- 6) To avoid ESD (Electro Static Discharge) damage, be sure to ground yourself before handling TFT-LCD Module.
- 7) Do not open nor modify the module assembly.
- 8) Do not press the reflector sheet at the back of the module to any direction.
- 9) In case if a module has to be put back into the packing container slot after it was taken out from the container, do not press the center of the LED Reflector edge. Instead, press at the far ends of the LED Reflector edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) After installation of the TFT Module into an enclosure (Notebook PC Bezel, for example), do not twist nor bend the TFT Module even momentarily. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Severe temperature condition may result in different luminance, response time.
- 14) Continuous operating TFT-LCD Module under high temperature environment may accelerate LED light bar exhaustion and reduce luminance dramatically.
- 15) The data on this specification sheet is applicable when LCD module is placed in landscape position.
- 16) Continuous displaying fixed pattern may induce image sticking. It is recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.

## 2. General Description

This specification applies to the 8.5 inch color TFT LCD module G085VW01 V3.

G085VW01 V3 designed with wide viewing angle; wide operating temperature and LEDs backlight is suited to be the display units for Industrial Applications.

All input signals are CMOS interface compatible.

The screen format is intended to support the WVGA (800(H) x 480(V)) screen and 262k colors (RGB 6-bits).

G085VW01 V3 is a RoHS product.

### 2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

Items	Unit	Specifications
Screen Diagonal	[inch]	8.5 ( 215.5 mm )
Active Area	[mm]	<b>184.8(H) x 110.88(V)</b>
Temperature Range Operating Storage (Non-Operating)	[°C] [°C]	-20 to +70 (panel surface temperature) -20 to +70
RoHS Compliance		RoHS Compliance



## 2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25 (Room Temperature):

Item	Unit	Conditions	Min.	Typ.	Max.	Note
White Luminance	[cd/m <sup>2</sup> ]	I <sub>F</sub> = 15mA by string Total 4 string (center point)	160	200	-	1
Uniformity	%	9 Points	70	75	-	1, 2, 3
Contrast Ratio			400	500	-	4
Response Time	[msec]	Rising	-	20	30	5
	[msec]	Falling	-	10	20	
	[msec]	Raising + Falling	-	30	50	
Viewing Angle	[degree]	Horizontal (Right) CR □ 10 (Left)	70	80	-	6
	[degree]		70	80	-	
	[degree]	Vertical (Upper) CR □ 10 (Lower)	70 50	80 60	- -	
Color / Chromaticity Coordinates (CIE 1931)		Red x	0.537	0.587	0.637	1
		Red y	0.297	0.347	0.397	
		Green x	0.289	0.339	0.389	
		Green y	0.524	0.574	0.624	
		Blue x	0.104	0.154	0.204	
		Blue y	0.067	0.117	0.167	
		White x	0.25	0.30	0.35	
	White y	0.27	0.32	0.37		
Color Gamut	%		-	50	-	1


Note 1: Measurement method

Equipment : Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (SR\_3 or equivalent)

Aperture 1□with 50cm viewing distance


Test Point Center

Environment < 1 lux

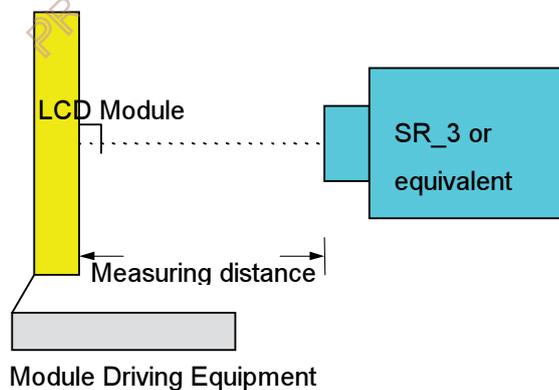



Note 2: Definition of 9 points position (Display active area : **184.8(H) x 110.88(V)**)

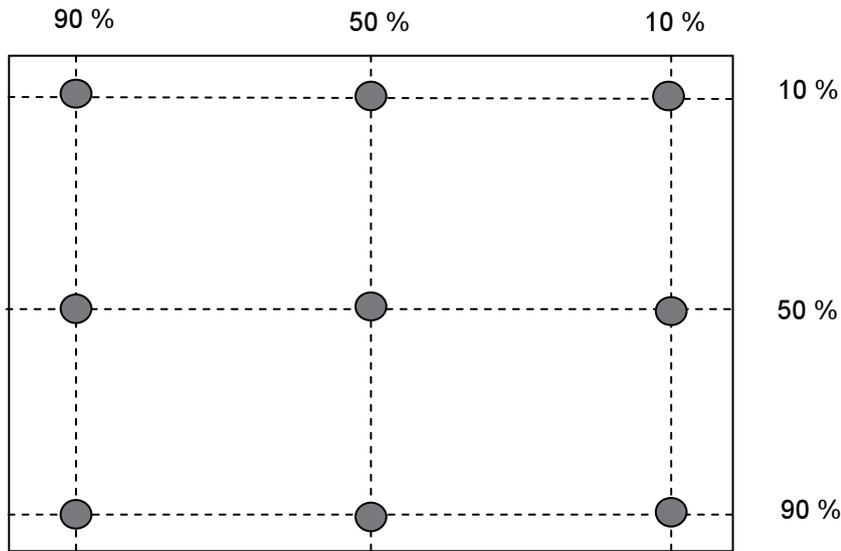

Note 3: The luminance uniformity of 9 points is defined by dividing the minimum luminance value by the maximum test point luminance


$$\delta_{w9} = \frac{\text{Minimum Brightness of nine points}}{\text{Maximum Brightness of nine points}}$$

Note 4 : Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$

Note 5: Definition of response time:


The output signals of photo detector are measured when the input signals are changed from "White" to "Black" (falling time) and from "Black" to "White" (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

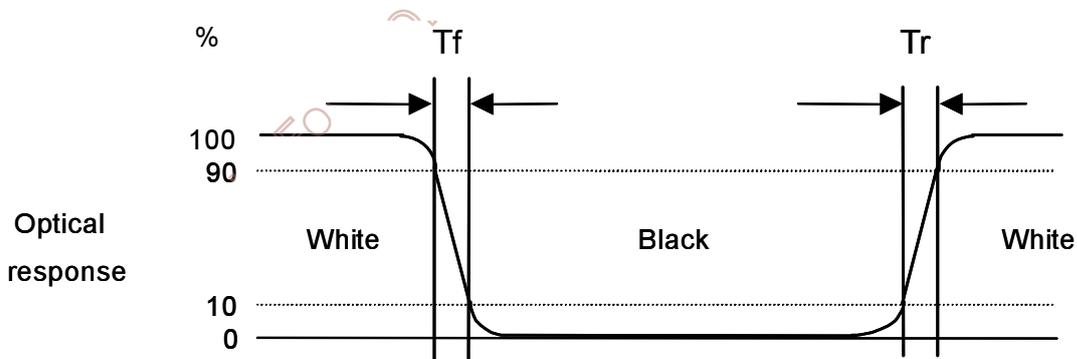




Note 6: Definition of viewing angle

Viewing angle is the measurement of contrast ratio  $\geq 10$ , at the screen center, over a  $180^\circ$  horizontal and  $180^\circ$  vertical range (off-normal viewing angles). The  $180^\circ$  viewing angle range is broken down as below:  $90^\circ$  ( $\theta$ ) horizontal left and right, and  $90^\circ$  ( $\phi$ ) vertical high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated to its center to develop the desired measurement viewing angle.

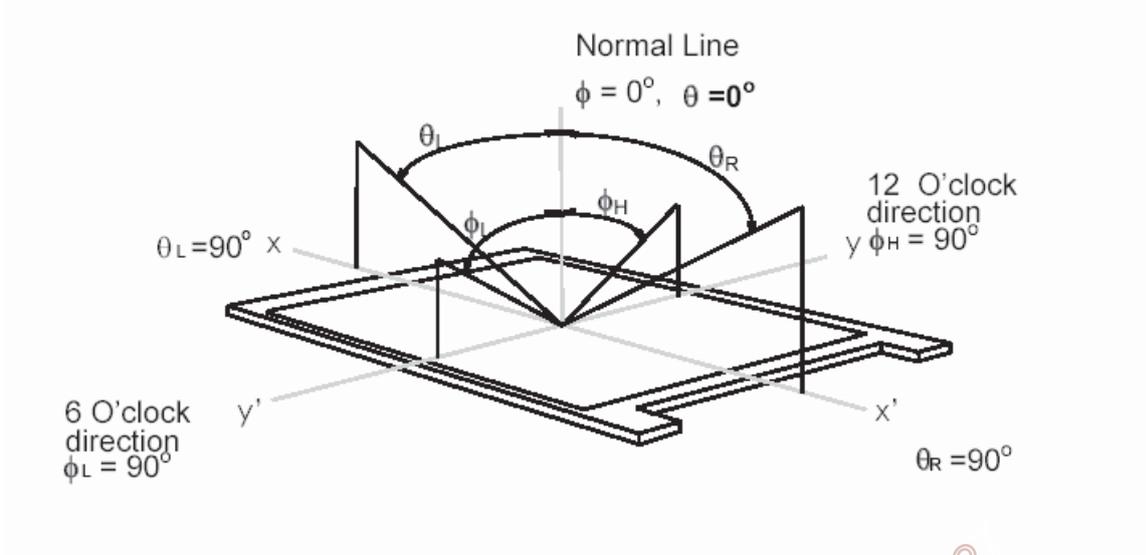

### 3. Functional Block Diagram

The following diagram shows the functional block of the 8.5 inch color TFT/LCD module:

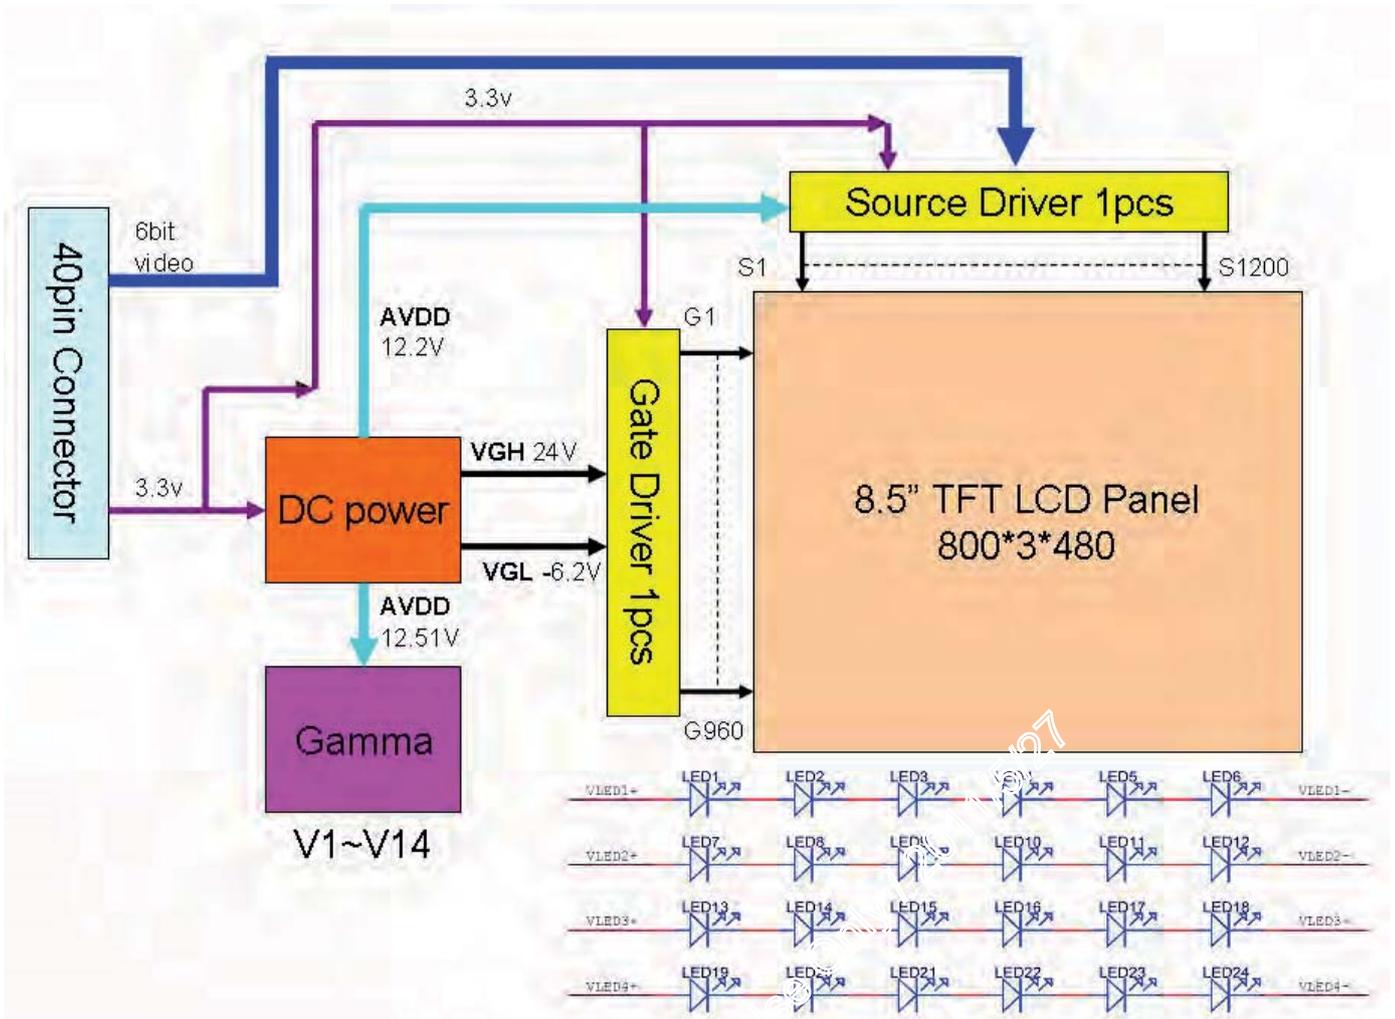

## 4. Absolute Maximum Ratings


### 4.1 Absolute Ratings of TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	VDD	-0.3	+3.6	[Volt]	

### 4.2 Absolute Ratings of Environment

Item	Symbol	Min	Max	Unit
Operating Temperature	TOP	-20	+70	[°C]
Operation Humidity	HOP	5	90	[%RH]
Storage Temperature	TST	-20	+70	[°C]
Storage Humidity	HST	5	90	[%RH]

Note: Maximum Wet-Bulb should be 39°C and no condensation.

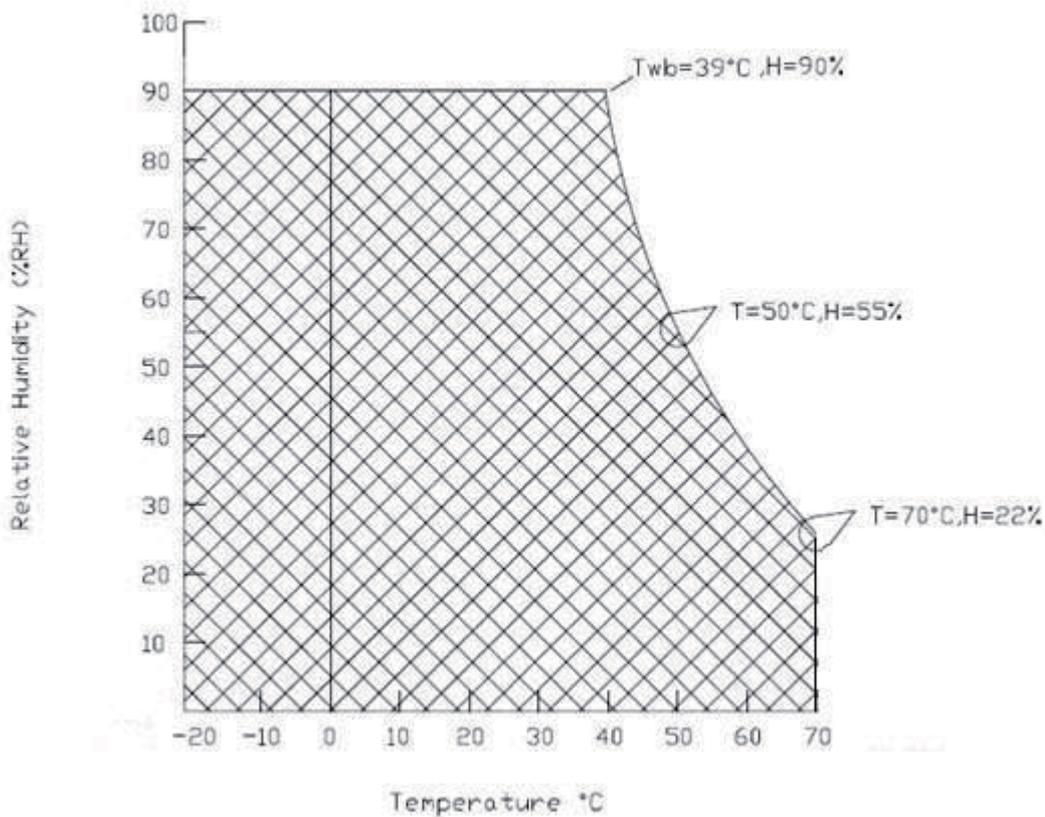



## 5. Electrical Characteristics

### 5.1 TFT LCD Module

#### 5.1.1 Power Specification

Symbol	Parameter	Min	Typ	Max	Units	Remark
VDD	Logic/LCD Input Voltage	3.0	3.3	3.6	[Volt]	
I <sub>VDD</sub>	LCD Input Current	135	150	200	[mA]	VDD=3.3V at 60 HZ, all Black Pattern
P <sub>VDD</sub>	LCD Power consumption	-	0.5	-	[Watt]	VDD=3.3V at 60 HZ, all Black Pattern
I <sub>rush LCD</sub>	LCD Inrush Current	-	-	1.5	[A]	Note 1; VDD=3.3V Black Pattern, Rising time must be >=470us
VDD <sub>rp</sub>	Allowable Logic/LCD Drive Ripple Voltage	-	-	100	[mV] p-p	VDD=3.3V at 60 HZ, all Black Pattern

Note 1: Measurement condition:

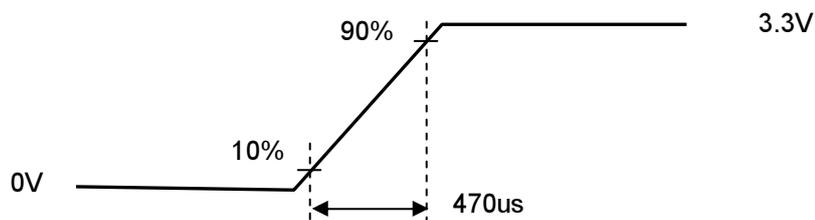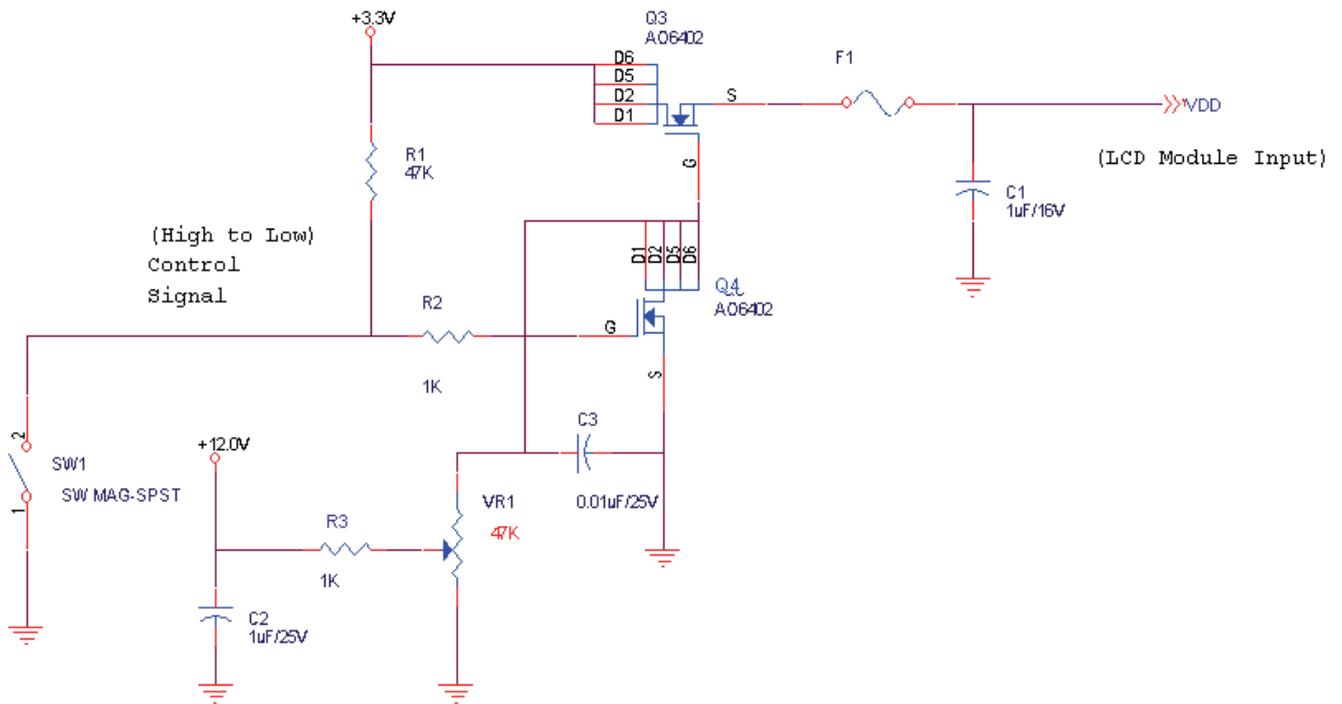

VDD rising time

## 5.2 Backlight Unit

### 5.2.1 Parameter guideline for LED backlight

Following characteristics are measured under a stable condition using an inverter at 25°C (Room Temperature):

Symbol	Parameter	Min.	Typ.	Max.	Unit	Remark
$V_{LED}$	Input Voltage	17.7	19.5	21.9	[Volt]	
$I_{LED}$	Input Current		15	20	[mA]	Each string (total 4 strings)
$P_{VLED}$	Power Consumption		1.2		[Watt]	
<b>Operation Lifetime</b>		25000	30000		Hrs	$I_r=15mA$ $T_a=25^{\circ}C$

Note 1:  $T_a$  means ambient temperature of TFT-LCD module.

Note 2: If G085VW01 V3 module is driven by high current or at high ambient temperature & humidity condition, the operating life will be reduced.

Note 3: Operating life means brightness goes down to 50% initial brightness. Minimum operating life time is estimated data.



## 6.2 Signal Description

Pin No.	Symbol	Description
1	GND	Ground
2	GND	Ground
3	CK	Clock signal for sampling each data signal
4	GND	Ground
5	GND	Ground
6	NC	No Connection
7	R0	RED data signal (LSB)
8	R1	RED data signal
9	R2	RED data signal
10	GND	Ground
11	R3	RED data signal
12	R4	RED data signal
13	R5	RED data signal (MSB)
14	GND	Ground
15	G0	GREEN data signal (LSB)
16	G1	GREEN data signal
17	G2	GREEN data signal
18	GND	Ground
19	G3	GREEN data signal
20	G4	GREEN data signal
21	G5	GREEN data signal (MSB)
22	GND	Ground
23	B0	BLUE data signal (LSB)
24	B1	BLUE data signal
25	B2	BLUE data signal
26	GND	Ground
27	B3	BLUE data signal
28	B4	BLUE data signal
29	B5	BLUE data signal (MSB)
30	GND	Ground

Pin No.	Symbol	Description
31	Hsync	Horizontal synchronous signal
32	GND	Ground
33	Vsync	Vertical synchronous signal
34	REV	Normal :OPEN/GND; Reverse :High
35	ENAB	Data enable signal (signal to settle the horizontal display position)
36	Mode	NC:DE mode
37	VDD	+3.3V power supply
38	VDD	+3.3V power supply
39	VDD	+3.3V power supply
40	VDD	+3.3V power supply

**Note:1 In DE Mode pull low Pin 31 & 33.**

## 6.3 Scanning Direction

The following figures show the image seen from the front view. The arrow indicates the direction of scan.

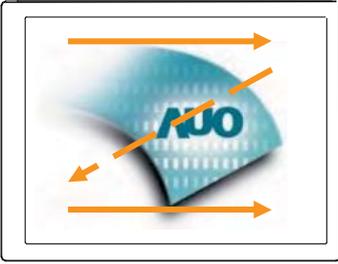


Fig. 1

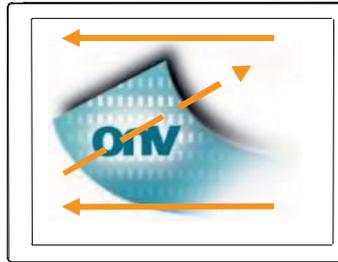


Fig. 2

Fig. 1 Normal scan (Pin6, GND or NC)

Fig. 2 Reverse scan (Pin6, High)


## 6.4 Interface Timing

### 6.4.1 Timing Characteristics

#### DE Mode

Signal	Symbol	Min.	Typ.	Max.	Unit	Remark	
Clock frequency (DOTCLK)	$1/T_{\text{CLOCK}}$	31.95	33.26	34.6	MHz	Note1	
Horizontal Section	Period	$T_H$	888	928	1138	$T_{\text{CLOCK}}$	Note1
	Active	$T_{\text{HD}}$	800				
	Blanking	$T_{\text{HB}}$	88	128	338		
Vertical Section	Period	$T_V$	515	525	762	$T_{\text{LINE}}$	Note1
	Active	$T_{\text{VD}}$	480				
	Blanking	$T_{\text{VB}}$	35	45	282		

Note: 1. Frame rate is 60 Hz at 3.3V VDD.

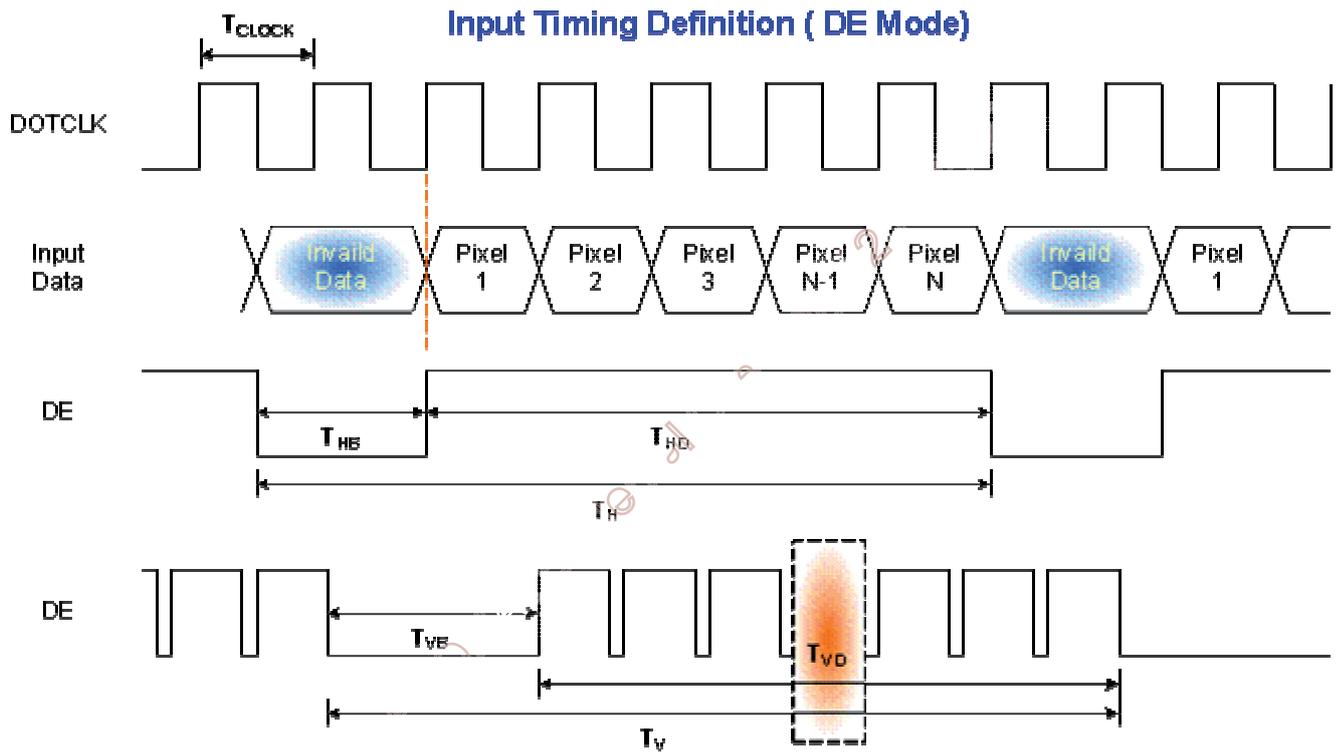


### 6.4.2 Input timing setup/ hold time


Parameter Note	Symbol	Min.	Typ.	Max.	Unit	Note
Clock	Frequency	1/Tc	31.95	33.26	34.6	MHz Note1
	Clk pulse duty	Tcwh	40	50	60	% Note1
	Clk cycle time	Tcph	25	-	-	ns Note1
Data	Setup time	Tdsu	5	-	-	ns Note1
	Hold time	Tdhd	5	-	-	ns Note1
	Overshoot	Vos			0.25	V Note2
	Undershoot	Vus	-0.25			V Note2
ENAB signal	Setup time	Tesu	5	-	-	ns Note1
	Hold time	Tehd	5	-	-	ns Note1

Note 1: Frame rate is 60 Hz at 3.3V VDD.

#### Input Clock and Data Timing Diagram

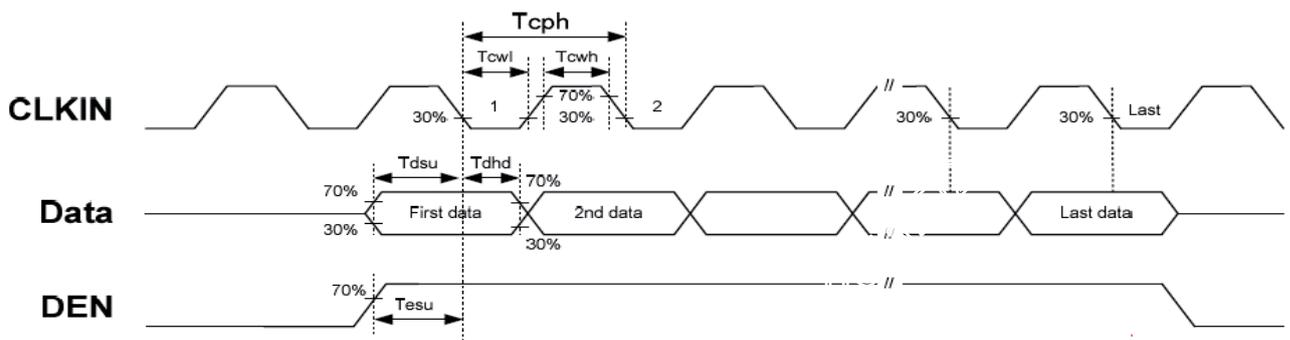


Note 2: Definition of Overshoot & Undershoot

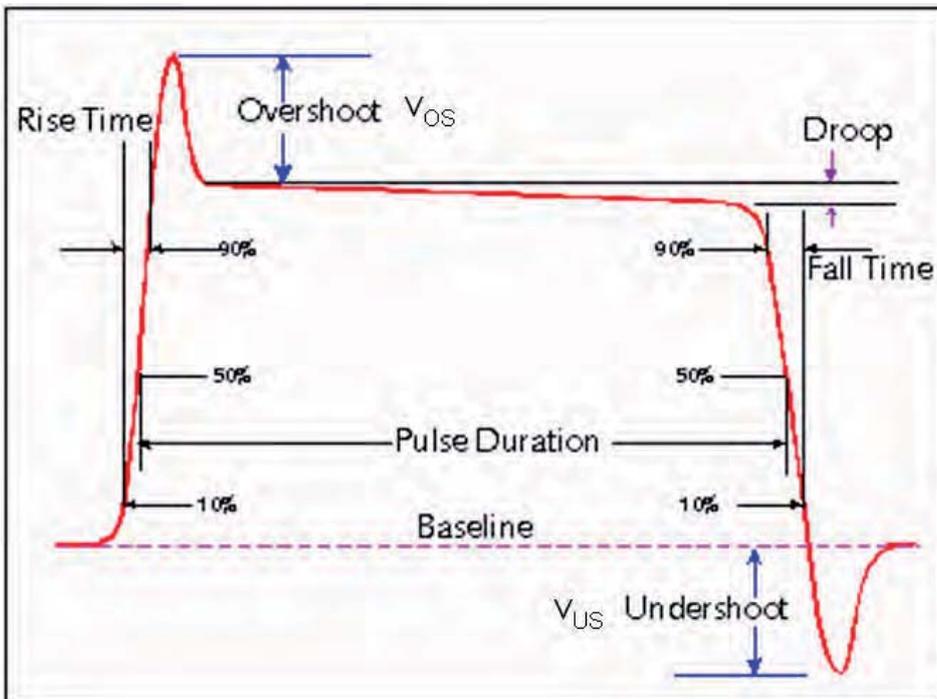

### 6.5 Power ON/OFF Sequence

VDD power and lamp on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

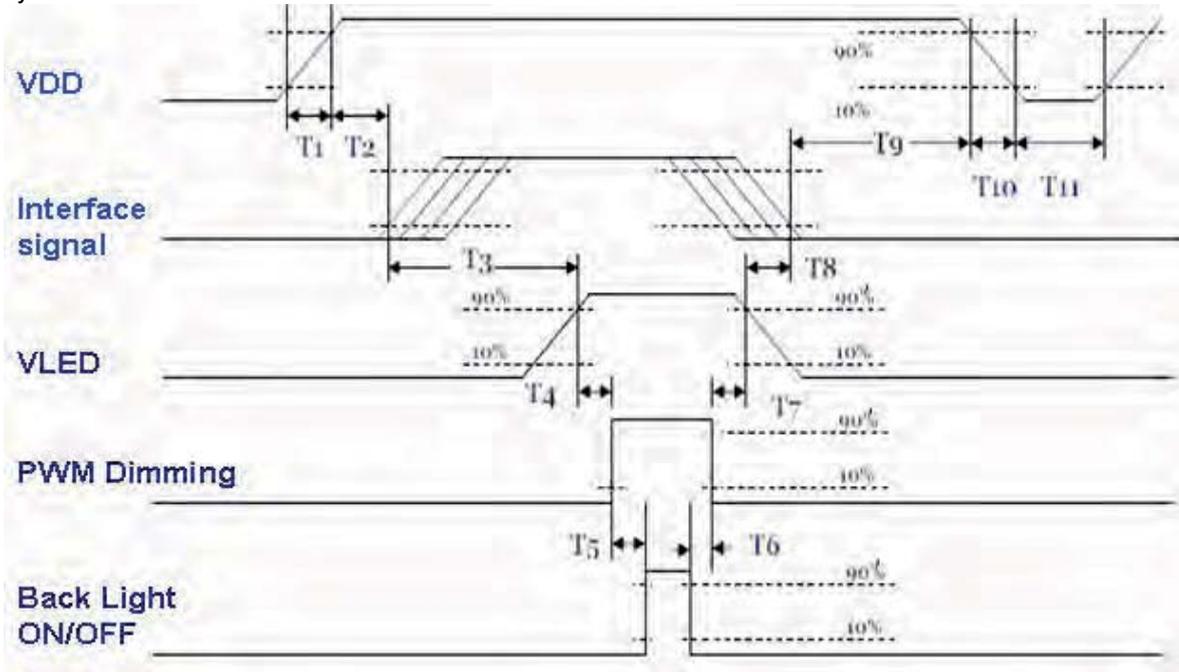

Power ON/OFF sequence timing

Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.5	-	10	[ms]
T2	0	-	50	[ms]
T3	200	-	-	[ms]
T4	10	-	-	[ms]
T5	10	-	-	[ms]
T6	0	-	-	[ms]
T7	10	-	-	[ms]
T8	100	-	-	[ms]
T9	0	16	50	[ms]
T10	-	-	10	[ms]
T11	500	-	-	[ms]

The above on/off sequence should be applied to avoid abnormal function in the display. Please make sure to turn off the power when you plug the cable into the input connector or pull the cable out of the connector.

## 7. Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

### 7.1 TFT LCD Signal (CN1): LCD Connector

Connector Name / Designation	Signal Connector
Manufacturer	STARTCONN or P-TWO
Connector Model Number	089H40-001100-G2-R or 196033-40041-3 or compatible.

### 7.2 LED Backlight Unit (FPC):

Connector Name / Designation	Lamp Connector
Manufacturer	IRISO or STM
Connector Model Number	IMSA-9632S-09Y931&MS2406P09 (STM)

Pin #	Symbol	Pin Description
1	V <sub>LED1+</sub>	LED anode
2	V <sub>LED2+</sub>	LED anode
3	V <sub>LED3+</sub>	LED anode
4	V <sub>LED4+</sub>	LED anode
5	NC	No connection
6	V <sub>LED4-</sub>	LED cathode
7	V <sub>LED3-</sub>	LED cathode
8	V <sub>LED2-</sub>	LED cathode
9	V <sub>LED1-</sub>	LED cathode

## 8. Reliability Test Criteria


Items	Required Condition	Note
Temperature Humidity Bias	40□/90%,300 hours	
High Temperature Operation	70□,300 hours	
Low Temperature Operation	-20□,300 hours	
Hot Storage	75□,300 hours	
Cold Storage	-25□,300 hours	
Thermal Shock Test	-20□/30 min ,60□/30 min ,100cycles	
Shock Test (Non-Operating)	50G,20ms,Half-sine wave,( ±X, ±Y, ±Z)	
Vibration Test (Non-Operating)	1.5G, (10~200Hz, P-P) 30 mins/axis (X, Y, Z)	
On/off test	On/10 sec, Off/10 sec, 30,000 cycles	
ESD	Contact Discharge: ± 8KV, 150pF(330Ω ) 1sec, 8 points, 25 times/ point Air Discharge: ± 15KV, 150pF(330Ω ) 1sec, 8 points, 25 times/ point	Note 1
EMI	30-230 MHz, limit 40 dBu V/m, 230-1000 MHz, limit 47 dBu V/m	

Note1: According to EN61000-4-2, ESD class B: Some performance degradation allowed. No data lost

- Self-recoverable. No hardware failures.



### 9.2 LCM Rear View

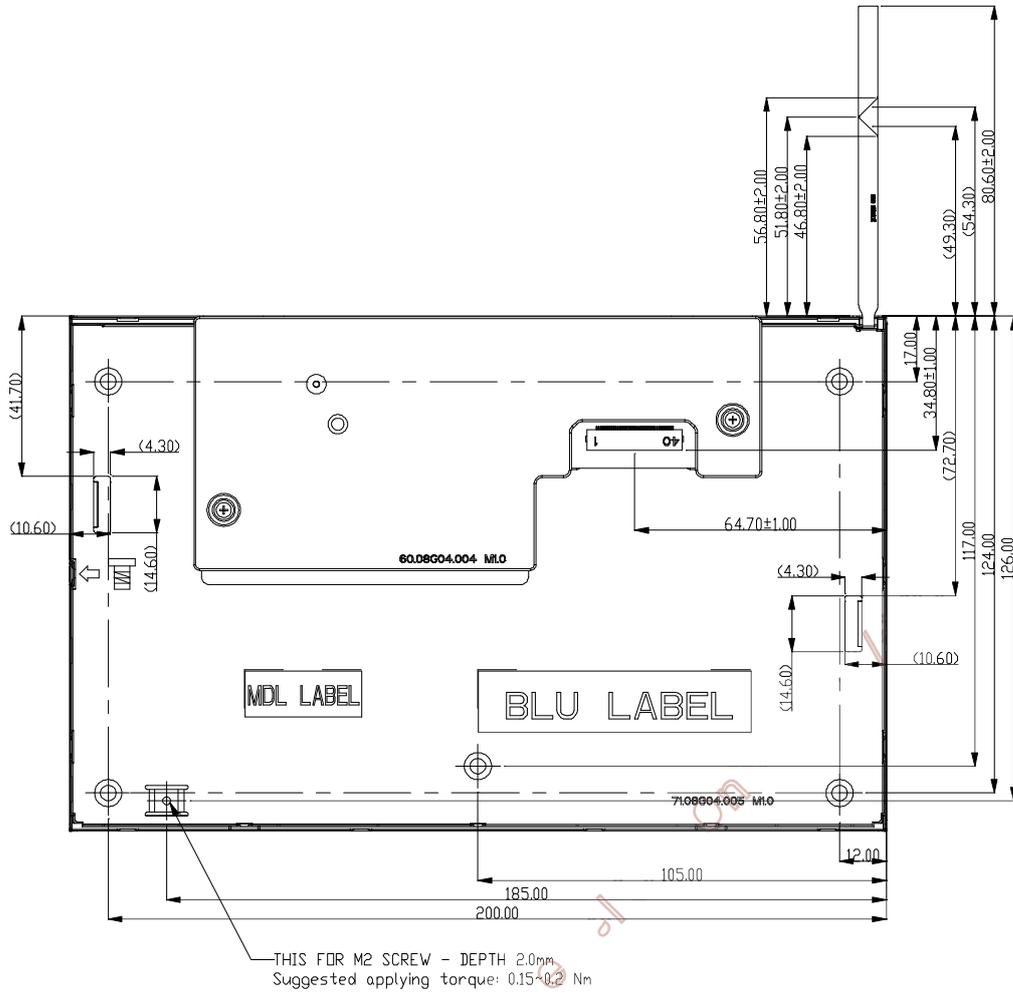

## 10. Label and Packaging

### 10.1 Shipping Label (on the rear side of TFT-LCD display)




### 10.2 Carton Package

Max capacity: 30 TFT-LCD modules per carton (30pcs \* 1 layer)

Max weight: 12kg per carton

Outside dimension of carton: 520(L)mm\*340(W)mm\*250(H)mm

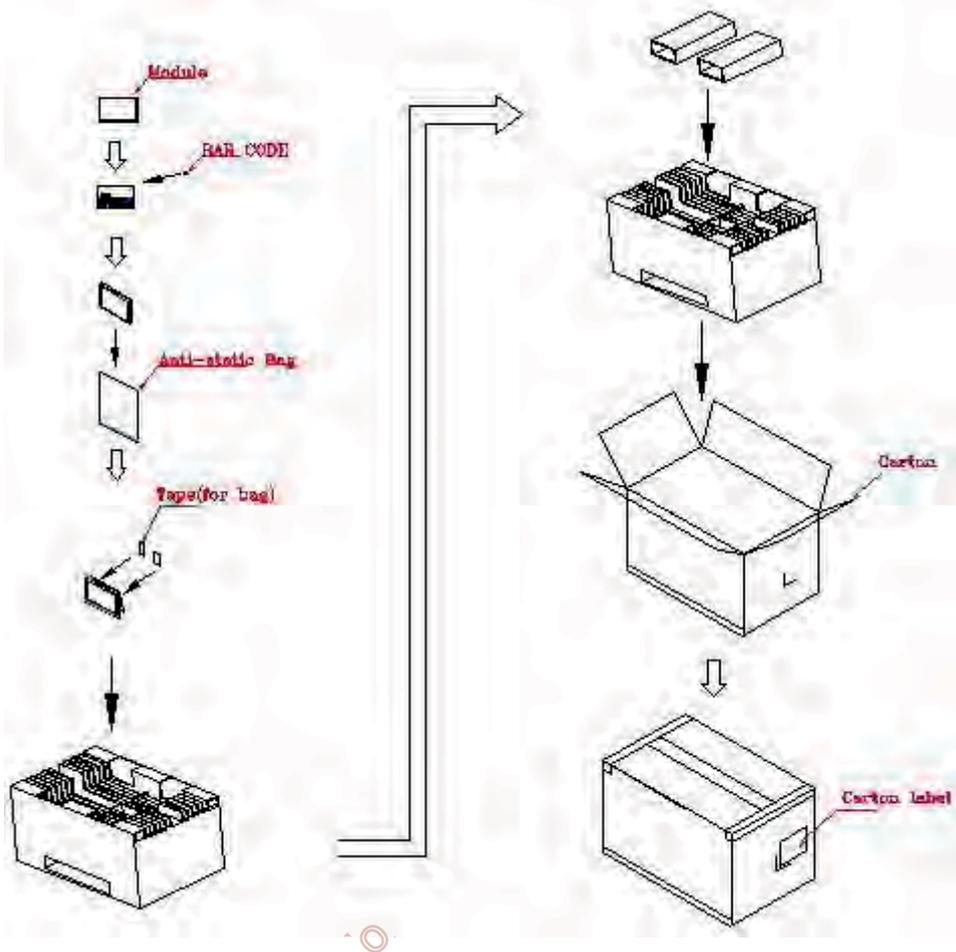

## 11 Safety

### 11.1 Sharp Edge Requirements

There will be no sharp edges or corners on the display assembly that could cause injury.

### 11.2 Materials

#### 11.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

#### 11.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The pRxINted circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be pRxINted on the pRxINted circuit board.

### 11.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

### 11.4 National Test Lab Requirement

The display module will satisfy all requirements for compliance to:

**UL 1950, First Edition**

U.S.A. Information Technology Equipment