



**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE HYDIS AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE HYDIS AND MUST BE RETURNED TO BOE HYDIS UPON ITS REQUEST

**TITLE : HV150UX1-101**  
**Product Specification for Customer**  
**Rev. A**

**BOE HYDIS TECHNOLOGY**

|                           |                          |           |                          |                |
|---------------------------|--------------------------|-----------|--------------------------|----------------|
| SPEC. NUMBER<br>S864-1254 | PRODUCT GROUP<br>TFT LCD | REV.<br>A | ISSUE DATE<br>2006.05.04 | PAGE<br>1OF 27 |
|---------------------------|--------------------------|-----------|--------------------------|----------------|



**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**REVISION HISTORY**

| REV. | ECN NO.    | DESCRIPTION OF CHANGES            | DATE     | PREPARED |
|------|------------|-----------------------------------|----------|----------|
| 0    |            | Initial Release                   | 05.12.20 | C.Y.CHO  |
| A    | E0604-F026 | Packing Change 3pcs/Box->4pcs/Box | 06.05.04 | H.R.PARK |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |
|      |            |                                   |          |          |

|                           |   |                 |
|---------------------------|---|-----------------|
| SPEC. NUMBER<br>S864-1254 | SPEC TITLE<br>HV150UX1-101 Product Specification for Customer | PAGE<br>2 OF 27 |
|---------------------------|---|-----------------|

**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**Contents**


| No       | Item   | Page |
|----------|--|------|
| 1.0      | General Description                                  | 4    |
| 2.0      | Absolute Maximum ratings                             | 6    |
| 3.0      | Electrical specifications.                           | 7    |
| 4.0      | Optical specifications.                              | 9    |
| 5.0      | Interface Connection                                 | 13   |
| 6.0      | Signal Timing Specification                          | 16   |
| 7.0      | Signal Timing waveforms                              | 16   |
| 8.0      | Input Signals, Display Colors & Gray Scale of Colors | 18   |
| 9.0      | Power Sequence                                       | 19   |
| 10.0     | Mechanical Characteristics                           | 20   |
| 11.0     | Reliability Test                                     | 21   |
| 12.0     | Handling & Cautions.                                 | 22   |
| 13.0     | Packing information                                  | 23   |
| 14.0     | Label  | 24   |
| Appendix | Outline drawing (Front and Rear)                     | 26   |

SPEC. NUMBER  
S864-1254SPEC TITLE  
HV150UX1-101 Product Specification for CustomerPAGE  
3 OF 27

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

HV150UX1-101 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.0 inch diagonally measured active area with UXGA resolutions (1600 horizontal by 1200 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The DC/AC inverter for back-light driving is not built in this model.

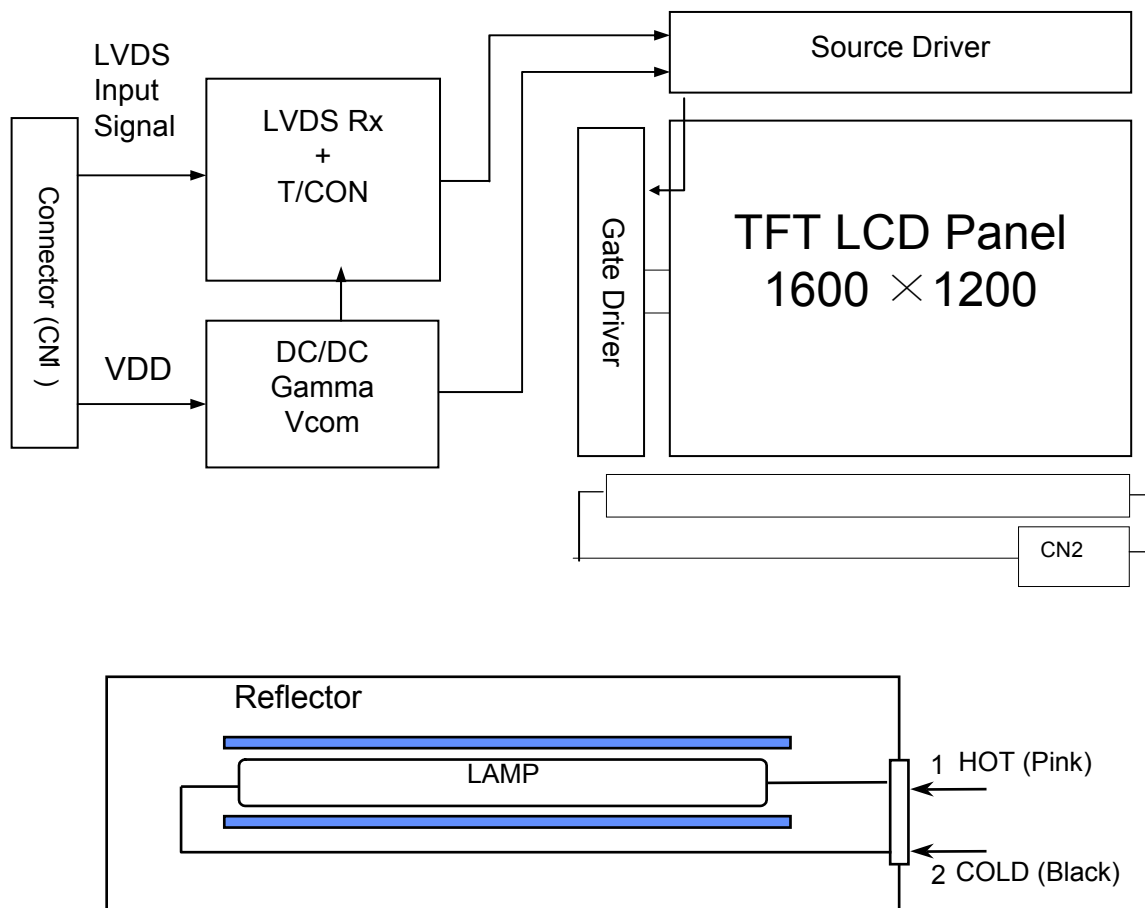

Note) The output of the inverter may change according to the material of the reflector.

**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**1.2 Features**

- 15.0 UXGA FFS
- Thin and light weight
- 3.3 V power supply
- 2 Channel LVDS Interface
- Single CCFL (Bottom side/Horizontal Direction)
- 262,144 colors
- Data enable signal mode
- Side Mounting Frame
- Green Product (RoHS)
- High contrast ratio

**1.3 General Specification**

The followings are general specifications at the model HV150UX1-101. (listed in Table 1.)

&lt;Table 1. General Specifications&gt;

| Parameter           | Specification                            | Unit   | Remarks |
|---------------------|--|--------|---------|
| Active area         | 304.8 (H) × 228.6 (V) (15.0" diagonal)   | mm     |         |
| Number of pixels    | 1600(H) × 1200(V)                        | pixels |         |
| Pixel pitch         | 0.1905(H) × 0.1905(V)                    | mm     |         |
| Pixel arrangement   | RGB Vertical stripe                      |        |         |
| Display colors      | 262,144                                  | colors |         |
| Display mode        | Normally Black                           |        |         |
| Dimensional outline | 317.3±0.5(H) × 242.0±0.5(V) × 6.5(D:max) | mm     |         |
| Weight              | 540 g (typ.)                             | g      |         |
| Surface treatment   | AG(H45%)/AR/2H                           |        |         |
| Back-light          | Bottom edge side, 1-CCFL type            |        | Note 1  |
| Power consumption   | P <sub>D</sub> : 2.0                     | W      |         |
|                     | P <sub>BL</sub> : 4.1                    | W      |         |
|                     | P <sub>total</sub> : 6.1                 | W      |         |

Note 1: CCFL (Cold Cathode Fluorescent Lamp)

|                           |   |                 |
|---------------------------|---|-----------------|
| SPEC. NUMBER<br>S864-1254 | SPEC TITLE<br>HV150UX1-101 Product Specification for Customer | PAGE<br>5 OF 27 |
|---------------------------|---|-----------------|



**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**2.0 ABSOLUTE MAXIMUM RATINGS**

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.


< Table 2. Absolute Maximum Ratings >

Ta=25+/-2°C

| Parameter             | Symbol           | Min. | Max.                 | Unit  | Remarks |
|-----------------------|------------------|------|----------------------|-------|---------|
| Power Supply Voltage  | V <sub>DD</sub>  | -0.3 | 4.0                  | V     |         |
| Logic Supply Voltage  | V <sub>IN</sub>  | -0.3 | V <sub>DD</sub> +0.3 | V     |         |
| Lamp Current          | I <sub>L</sub>   | 3.0  | 7.0                  | mArms | (1)     |
| Lamp frequency        | F <sub>L</sub>   | 45   | 80                   | kHz   |         |
| Operating Temperature | T <sub>OP</sub>  | 0    | +50                  | °C    | (2)     |
| Operating Humidity    | RH <sub>OP</sub> | -    | 80                   | %     |         |
| Storage Temperature   | T <sub>SP</sub>  | -20  | +60                  | °C    |         |
| Storage Humidity      | RH <sub>SP</sub> | -    | 90                   | %     |         |

Note (1) Permanent damage to the device may occur if maximum values are exceeded Functional operation should be restricted to the condition described under normal operating conditions.

Note (2) Temperature and relative humidity range are shown in the figure below.  
 95 % RH Max. ( 40 °C ≥ Ta)  
 Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

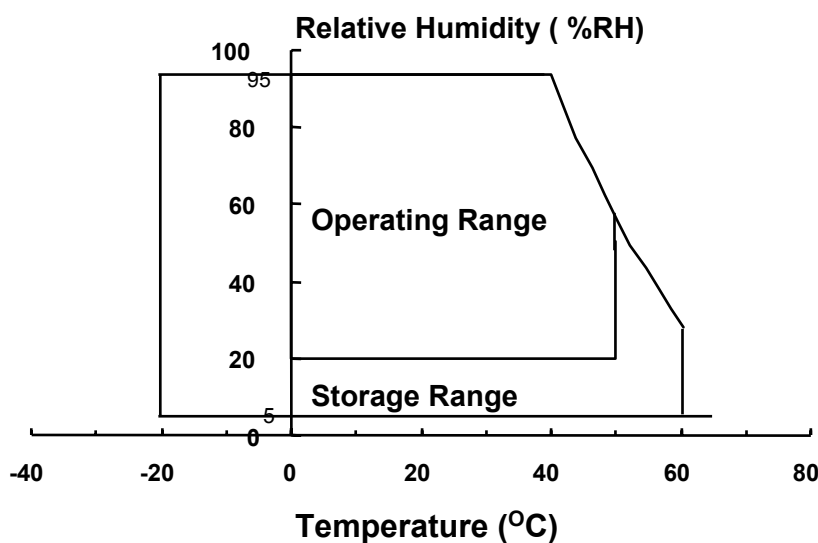

|                           |   |                 |
|---------------------------|---|-----------------|
| SPEC. NUMBER<br>S864-1254 | SPEC TITLE<br>HV150UX1-101 Product Specification for Customer | PAGE<br>6 OF 27 |
|---------------------------|---|-----------------|



**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**3.0 ELECTRICAL SPECIFICATIONS**

**3.1 Electrical Specifications**

< Table 3. Electrical specifications >

| Parameter                                    |             | Min.   | Typ.   | Max.  | Unit      | Remarks                              |
|--|-------------|--------|--------|-------|-----------|--------------------------------------|
| Power Supply Voltage                         | $V_{DD}$    | 3.0    | 3.3    | 3.6   | V         | Note1                                |
| Permissible Input Ripple Voltage             | $V_{RF}$    | -      | -      | 100   | mV        | At $V_{DD} = 3.3V$                   |
| Power Supply Current                         | $I_{DD}$    | -      | 610    | 760   | mA        | Note1                                |
| High Level Differential Input Signal Voltage | $V_{IH}$    | -      | -      | + 100 | mV        | $V_{cm} = 1.2 V$ typ                 |
| Low Level Differential Input Signal Voltage  | $V_{IL}$    | - 100  | -      | -     |           |                                      |
| Back-light Lamp Voltage                      | $V_{BL}$    | 600    | 630    | 770   | $V_{rms}$ | Note2                                |
| Back-light Lamp Current                      | $I_{BL}$    | 3.0    | 6.5    | 7.0   | mA        |                                      |
| Back-light Lamp operating Frequency          | $F_L$       | 45     | 60     | 80    | KHz       | One Lamp , Note3                     |
| Lamp Start Voltage                           |             | 1,180  | 940    | -     | $V_{rms}$ | At $T_a = 25^{\circ}C$<br>Note 4     |
|  |             | 1,420  | 1,180  | -     | $V_{rms}$ | At $T_a = 0^{\circ}C$<br>Note 4      |
| Lamp Life                                    |             | 12,000 | 15,000 | -     | Hrs       | At $I_{BL} = 6.5 mA$ ,<br>Max. Note5 |
| Power Consumption                            | $P_D$       | -      | 2.0    | -     | W         | Note1                                |
|  | $P_{BL}$    | -      | 4.1    | -     | W         | Note 6,<br>$I_{BL} = 6.5mA$          |
|  | $P_{total}$ | -      | 6.1    | -     | W         |                                      |

SPEC. NUMBER  
S864-1254

SPEC TITLE  
HV150UX1-101 Product Specification for Customer

PAGE  
7 OF 27

**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

- Notes :
- The supply voltage is measured and specified at the interface connector of LCM.  
The current draw and power consumption specified is for 3.3V at 25°C.
    - Typ : Window XP pattern
    - Max : Vertical sub line pattern (L255)
  - Reference value, which is measured with Samsung Electric SIC-180 Inverter.  
(VBL Min is value at IBL Min and VBL Max is value at IBL Max)
  - The lamp frequency should be selected as different as possible from the horizontal synchronous frequency and its harmonics to avoid interference which may cause line flow on the display.
  - For starting the backlight unit, the output voltage of DC/AC's transformer should be larger than the minimum lamp starting voltage.  
(1,180 Vrms at 25 °C & 1,420 Vrms at 0 °C)  
If an inverter has shutdown function it should keep its output for more than 1 second even if the lamp connector open. Otherwise the lamps may not to be turned on.
  - End of Life shall be determined by the time when any of the following is satisfied under continuous lighting at 25°C and IBL = 6.5[mA] Max Only.
    - Intensity drops to 50% of the Initial Value.
  - Calculated value for reference (VBL × IBL)

SPEC. NUMBER  
S864-1254SPEC TITLE  
HV150UX1-101 Product Specification for CustomerPAGE  
8 OF 27





**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**4.0 OPTICAL SPECIFICATION**

**4.1 Overview**

The test of Optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$  lux and temperature =  $25 \pm 2^\circ\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and TOPCONE BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\Theta$  and  $\Phi$  equal to  $0^\circ$ . We refer to  $\Theta \emptyset = 0$  ( $= \Theta 3$ ) as the 3 o'clock direction (the "right"),  $\Theta \emptyset = 90$  ( $= \Theta 12$ ) as the 12 o'clock direction ("upward"),  $\Theta \emptyset = 180$  ( $= \Theta 9$ ) as the 9 o'clock direction ("left") and  $\Theta \emptyset = 270$  ( $= \Theta 6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\Theta$  and/or  $\emptyset$ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement... VDD shall be  $3.3 \pm 0.3\text{V}$  at  $25^\circ\text{C}$ . Optimum viewing angle direction is 6 o'clock.

**4.2 Optical Specifications**

<Table 4. Optical Specifications>

| Parameter                  |            | Symbol        | Condition                                    | Min.  | Typ.  | Max.  | Unit              | Remark |
|----------------------------|------------|---------------|--|-------|-------|-------|-------------------|--------|
| Viewing Angle range        | Horizontal | $\Theta_3$    | CR > 10                                      | -     | 85    | -     | Deg.              | Note 1 |
|                            |            | $\Theta_9$    |  | -     | 85    | -     | Deg.              |        |
|                            | Vertical   | $\Theta_{12}$ |  | -     | 85    | -     | Deg.              |        |
|                            |            | $\Theta_6$    |  | -     | 85    | -     | Deg.              |        |
| Luminance Contrast ratio   |            | CR            | $\Theta = 0^\circ$                           | -     | 500:1 | -     |                   | Note 2 |
| Center Luminance of White  | 1 Point    | $Y_w$         | $\Theta = 0^\circ$<br>IBL = 6.5mA            | 170   | 200   | -     | cd/m <sup>2</sup> |        |
| White Luminance uniformity | 5 Points   | $\Delta Y5$   |  | 80    | 85    | -     | %                 |        |
| White Chromaticity         |            | $W_x$         | $\Theta = 0^\circ$                           | 0.273 | 0.303 | 0.333 |                   | Note 3 |
|                            |            | $W_y$         |  | 0.299 | 0.329 | 0.359 |                   |        |
| Reproduction of color      | Red        | $R_x$         |  | 0.544 | 0.574 | 0.604 |                   |        |
|                            |            | $R_y$         |  | 0.306 | 0.336 | 0.366 |                   |        |
|                            | Green      | $G_x$         |  | 0.268 | 0.298 | 0.328 |                   |        |
|                            |            | $G_y$         |  | 0.523 | 0.553 | 0.583 |                   |        |
|                            | Blue       | $B_x$         |  | 0.119 | 0.149 | 0.179 |                   |        |
|                            |            | $B_y$         |  | 0.109 | 0.139 | 0.169 |                   |        |
| Response Time              | Rise       | $T_r$         | Ta= $25^\circ\text{C}$<br>$\Theta = 0^\circ$ | -     | 30    | -     | ms                |        |
|                            | Decay      | $T_d$         |  | -     | 30    | -     |                   |        |
| Cross Talk                 |            | CT            | $\Theta = 0^\circ$                           | -     | -     | 2.0   | %                 |        |

SPEC. NUMBER  
S864-1254


SPEC TITLE  
HV150UX1-101 Product Specification for Customer


PAGE  
9 OF 27

- Notes :
1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE1 shown in Appendix).
  2. Contrast measurements shall be made at viewing angle of  $\theta = 0$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state .  
(see FIGURE1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically as  $CR = \text{Luminance when displaying a white raster} / \text{Luminance when displaying a black raster}$ .
  3. The color chromaticity coordinates specified in Table 4. shall be calculated from the spectral data measured with all pixels first in red, green, blue, and white. Measurements shall be made at the center of the panel.

### 4.3 Optical measurements


**Figure 1. Measurement Set Up**

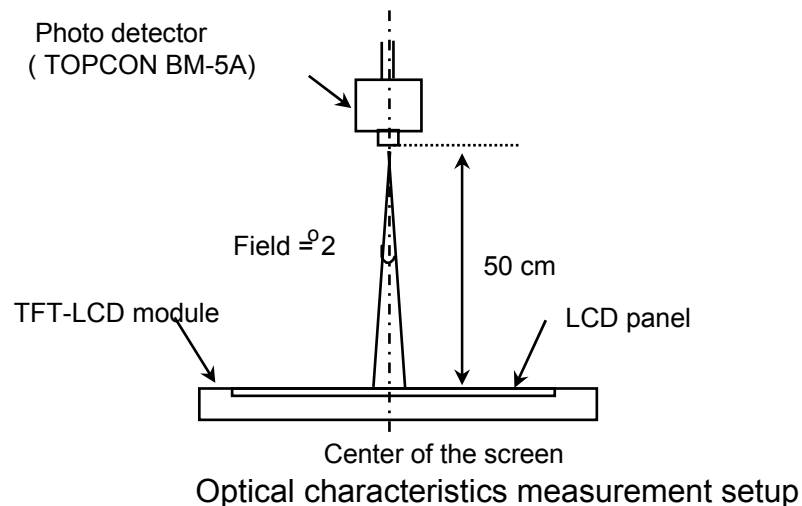

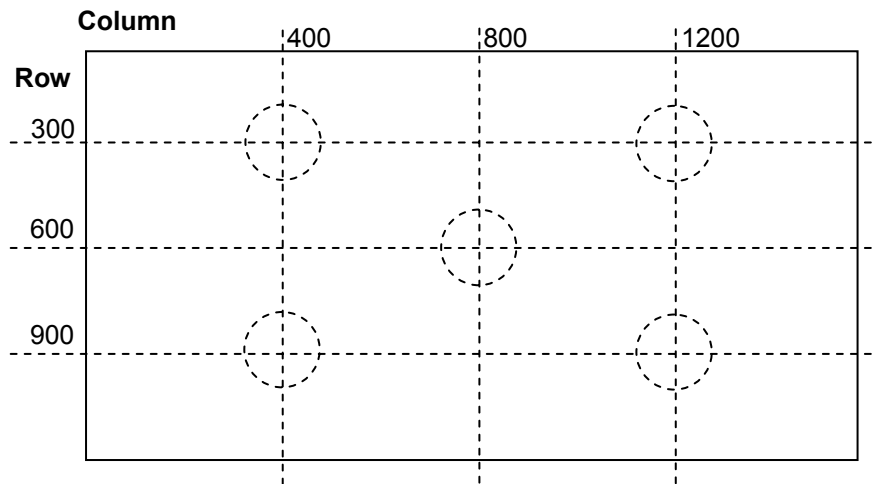
**Figure 2. White Luminance (Center) and Uniformity Measurement Locations ( 5points)**


White luminance : Center Luminance of white is defined as luminance values of center 1 point. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2.

Uniformity of 5 points : The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y5 = \text{Minimum Luminance of five points} / \text{Maximum Luminance of five points}$  (see FIGURE 2)

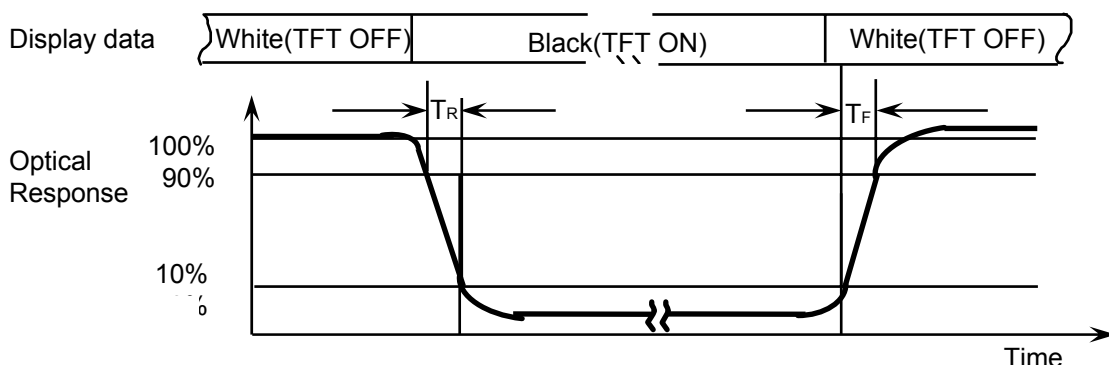**Figure 3. Response Time Testing**


The electro-optical response time measurements shall be made as shown in FIGURE 3 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is  $T_d$  and 90% to 10% is  $T_r$ .

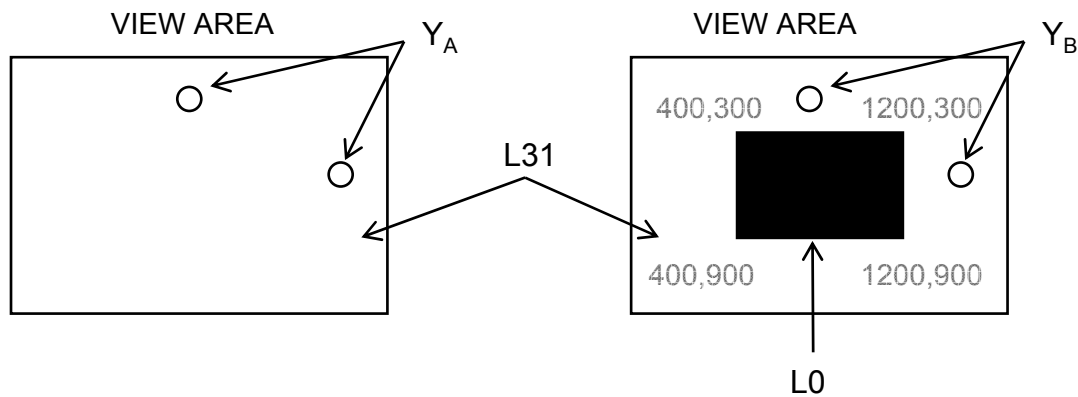**Figure 4. Cross Modulation Test Description**


Test point of  $Y_A / Y_B$  : Horizontal - 1400, 600  
 Vertical - 800, 150

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_B} \right| \times 100$$

Where:

$Y_A$  = Initial luminance of measured area ( $\text{cd}/\text{m}^2$ )

$Y_B$  = Subsequent luminance of measured area ( $\text{cd}/\text{m}^2$ )

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance ( $Y_A$ ) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance ( $Y_B$ ) of that same area when any adjacent area is driven dark (Refer to FIGURE 4).

**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**5.0 INTERFACE CONNECTION.****5.1 Electrical Interface Connection**

The electronics interface connector is a model FI-XB30S-HFxx manufactured by JAE or equivalent . The mating connector part number is FI-S30S or FI-SE30M or FI-S30S or equivalent . The connector interface pin assignments are listed in Table 5.

&lt;Table 5. Pin Assignments for the Interface Connector&gt;


| Terminal | Symbol   | Functions   |
|----------|----------|---|
| 1        | GND      | GND   |
| 2        | VDD      | Power Supply : +3.3V (typical)                              |
| 3        | VDD      | Power Supply : +3.3V (typical)                              |
| 4        | NC       | NC  |
| 5        | NC       | NC  |
| 6        | NC       | NC  |
| 7        | NC       | NC  |
| 8        | O_RIN0-  | -LVDS differential data input (R0~R5,G0) (Odd pixel)        |
| 9        | O_RIN0+  | +LVDS differential data input (R0~R5,G0) (Odd pixel)        |
| 10       | VSS      | GND   |
| 11       | O_RIN1-  | -LVDS differential data input (G1~G5,B0,B1) (Odd pixel)     |
| 12       | O_RIN1+  | +LVDS differential data input (G1~G5,B0,B1) (Odd pixel)     |
| 13       | VSS      | GND   |
| 14       | O_RIN2-  | -LVDS differential data input (B2~B5,HS,VS,DE) (Odd pixel)  |
| 15       | O_RIN2+  | +LVDS differential data input (B2~B5,HS,VS,DE) (Odd pixel)  |
| 16       | VSS      | GND   |
| 17       | O_CLKIN- | -LVDS differential Clock input (Odd pixel)                  |
| 18       | O_CLKIN+ | +LVDS differential Clock input (Odd pixel)                  |
| 19       | VSS      | GND   |
| 20       | E_RIN0-  | -LVDS differential data input (R0~R5,G0) (Even pixel)       |
| 21       | E_RIN0+  | +LVDS differential data input (R0~R5,G0) (Even pixel)       |
| 22       | VSS      | GND   |
| 23       | E_RIN1-  | -LVDS differential data input (G1~G5,B0,B1) (Even pixel)    |
| 24       | E_RIN1+  | +LVDS differential data input (G1~G5,B0,B1) (Even pixel)    |
| 25       | VSS      | GND   |
| 26       | E_RIN2-  | -LVDS differential data input (B2~B5,HS,VS,DE) (Even pixel) |
| 27       | E_RIN2+  | +LVDS differential data input (B2~B5,HS,VS,DE) (Even pixel) |
| 28       | VSS      | GND   |
| 29       | E_CLKIN- | -LVDS differential Clock input (Even pixel)                 |
| 30       | E_CLKIN+ | +LVDS differential Clock input (Even pixel)                 |

SPEC. NUMBER  
S864-1254

SPEC TITLE  
HV150UX1-101 Product Specification for Customer


PAGE  
13 OF 27

### 5-2. LVDS Interface

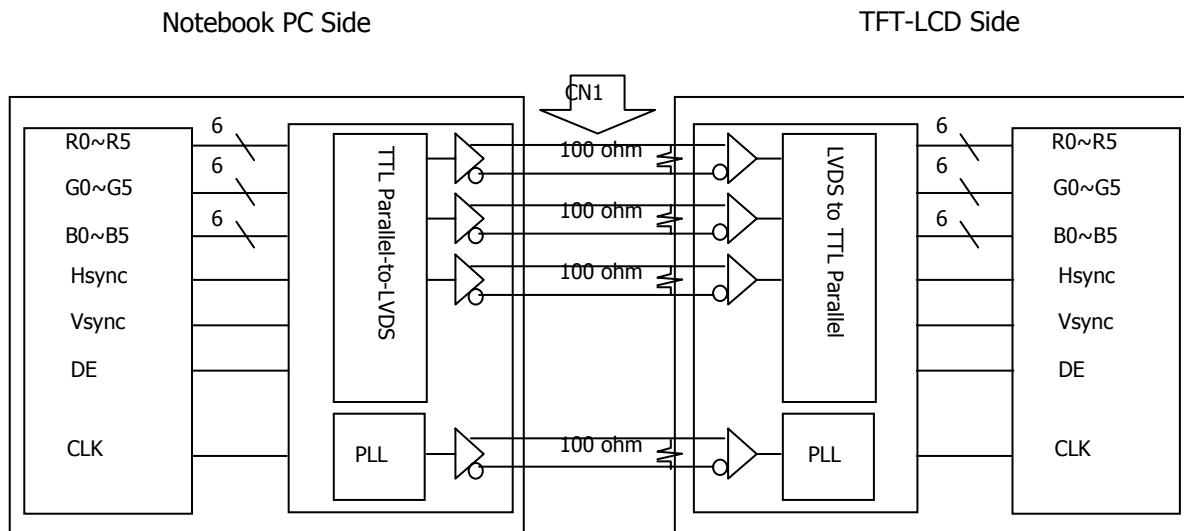

Note. Transmitter : Thine THC63LVDM63A or equivalent. Transmitter is not contained in Module.

### 5.3.LVDS Input signal

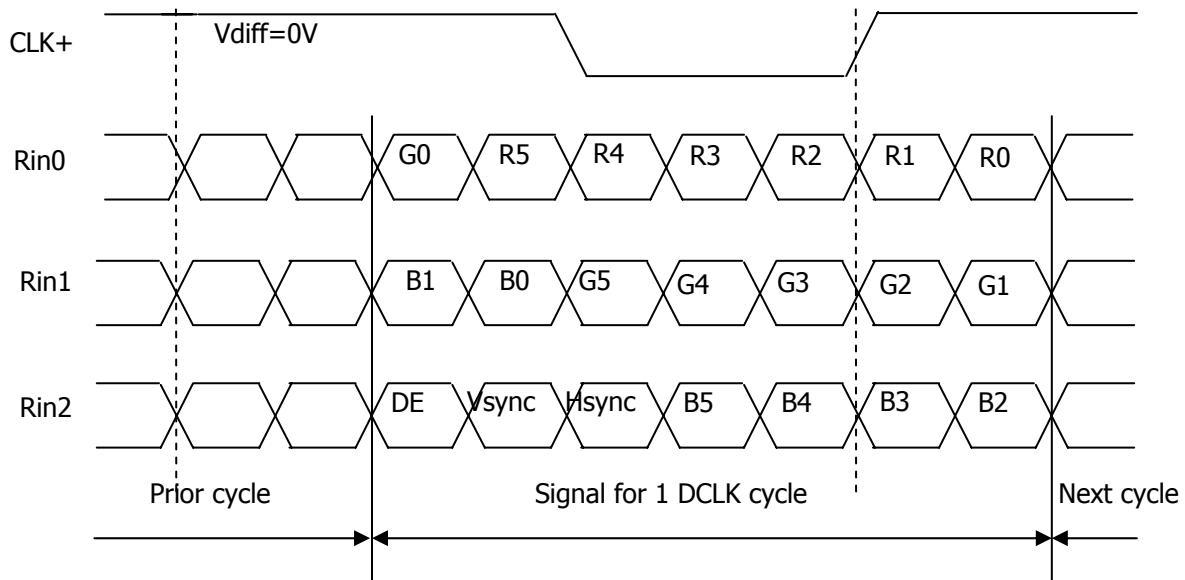

Note. Pin connection in case of using Thine THC63LVDM63A

**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

&lt;Table 6. Pin connection in case of using Thine THC63LVDM63A&gt;

| Input signal | Transmitter | Input signal | Transmitter |
|--------------|-------------|--------------|-------------|
| DCLK         | CLK IN(26)  | G4           | TB3(10)     |
| R0           | TA0(44)     | G5           | TB4(12)     |
| R1           | TA1(45)     | B0           | TB5(13)     |
| R2           | TA2(47)     | B1           | TB6(15)     |
| R3           | TA3(48)     | B2           | TC0(16)     |
| R4           | TA4(1)      | B3           | TC1(18)     |
| R5           | TA5(3)      | B4           | TC2(19)     |
| G0           | TA6(4)      | B5           | TC3(20)     |
| G1           | TB0(6)      | Hsync        | TC4(22)     |
| G2           | TB1(7)      | Vsync        | TC5(23)     |
| G3           | TB2(9)      | DE           | TC6(25)     |

**5.4.Back-light Interface**

The Back-light interface connector is a model BHSR-02VS-1 manufactured by JST or equivalent. The connector interface pin assignments are listed in Table 7.

&lt;Table 7. Back-light Electrical Interface&gt;

| Terminal No. | Symbol | Function                         | Color |
|--------------|--------|----------------------------------|-------|
| 1            | VL     | CCFL Power Supply (High Voltage) | Pink  |
| 2            | GL     | CCFL Power Supply (GND Side)     | Black |

SPEC. NUMBER  
S864-1254SPEC TITLE  
HV150UX1-101 Product Specification for CustomerPAGE  
15 OF 27

## 6.0. SIGNAL TIMING SPECIFICATION


The specification of the signal timing parameters are listed in Table 8.

<Table 8. Signal Timing Specification.>

| Item                      | Symbols | Min   | Typ   | Max   | Unit |
|---------------------------|---------|-------|-------|-------|------|
| Frame Period              | T1      | 28.57 | 16.67 | 15.87 | ms   |
| Vertical Display Period   | T2      | -     | 16    | -     | ms   |
| One line Scanning Period  | T3      | -     | 13.3  | -     | us   |
| Horizontal Display Period | T4      | -     | 9.9   | -     | us   |
| Clock Frequency           | 1/T5    | 47.25 | 81    | 85    | MHz  |

## 7.0 SIGNAL TIMING WAVEFORMS

### 7.1 Timing wave forms of interface signal

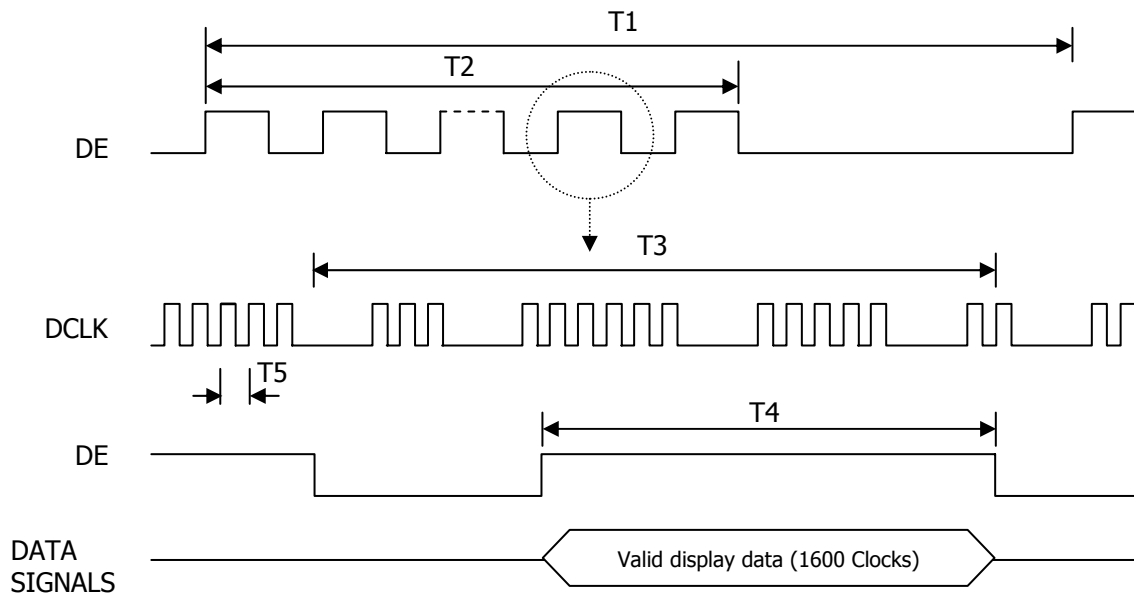




## 7.2 LVDS Rx Interface Timing Parameter

The specification of the LVDS Rx interface timing parameter is listed in Table 9.

<Table 9. LVDS Rx Interface Timing Specification>

| Item         | Symbol | Min             | Typ         | Max             | Unit | Remark |
|--------------|--------|-----------------|-------------|-----------------|------|--------|
| PLL Set      | tRPLL  | -               | -           | 10.0            | msec |        |
| CLKIN Period | tRICP  | 11.77           | 12.35       | 21.16           | nsec |        |
| Input Data 0 | tRIP0  | -0.4            | 0.0         | +0.4            | nsec |        |
| Input Data 1 | tRIP1  | tRICP/7-0.4     | tRICP/7     | tRICP/7+0.4     | nsec |        |
| Input Data 2 | tRIP2  | 2 × tRICP/7-0.4 | 2 × tRICP/7 | 2 × tRICP/7+0.4 | nsec |        |
| Input Data 3 | tRIP3  | 3 × tRICP/7-0.4 | 3 × tRICP/7 | 3 × tRICP/7+0.4 | nsec |        |
| Input Data 4 | tRIP4  | 4 × tRICP/7-0.4 | 4 × tRICP/7 | 4 × tRICP/7+0.4 | nsec |        |
| Input Data 5 | tRIP5  | 5 × tRICP/7-0.4 | 5 × tRICP/7 | 5 × tRICP/7+0.4 | nsec |        |
| Input Data 6 | tRIP6  | 6 × tRICP/7-0.4 | 6 × tRICP/7 | 6 × tRICP/7+0.4 | nsec |        |

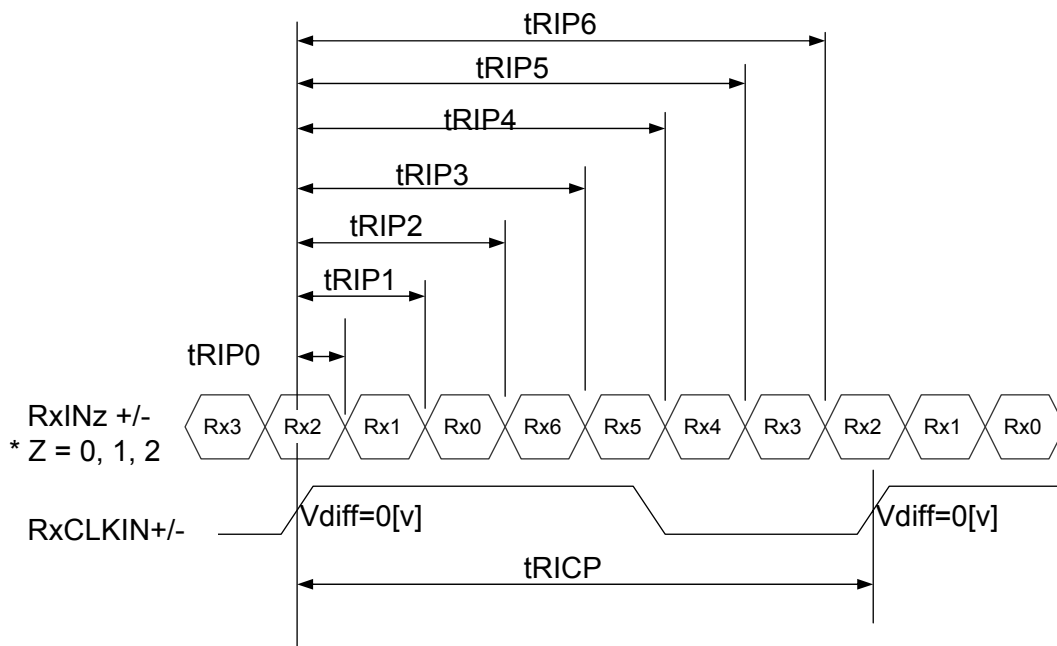



**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**8.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS**

Each color is displayed in sixty-four gray scales from a 6 bit data signal input. A total of 262,144 colors are derived from the resultant 18 bit data. Table 10. shows the input signals, basic display colors and gray scale for each color.

<Table 10. Input signals, Basic display colors and Gray scale for each color.>

|                             | Colors & Gray scale | Data signal |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------------|---------------------|-------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
|                             |                     | R0          | R1 | R2 | R3 | R4 | R5 | G0 | G1 | G2 | G3 | G4 | G5 | B0 | B1 | B2 | B3 | B4 | B5 |
| Basic colors                | Black               | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Blue                | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|                             | Green               | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Light Blue          | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
|                             | Red                 | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Purple              | 1           | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|                             | Yellow              | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
| White                       | 1                   | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |    |
| Gray scale of Red           | Black               | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                   | 1           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Darker              | 0           | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                   |             |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |
|                             | ▽                   |             |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |
|                             | Brighter            | 1           | 0  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Gray scale of Green         | Black               | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                   | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | Darker              | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                   |             |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |
|                             | ▽                   |             |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |
|                             | Brighter            | 0           | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
| Gray scale of Blue          | Black               | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                   | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  |
|                             | Darker              | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  |
|                             | △                   |             |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |
|                             | ▽                   |             |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |
|                             | Brighter            | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 1  | 1  | 1  | 1  |
| Gray scale of White & Black | Black               | 0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                             | △                   | 1           | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  |
|                             | Darker              | 0           | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  |
|                             | △                   |             |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |
|                             | ▽                   |             |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |
|                             | Brighter            | 1           | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 1  |
| White                       | 1                   | 1           | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |    |


SPEC. NUMBER  
S864-1254

SPEC TITLE  
HV150UX1-101 Product Specification for Customer

PAGE  
18 OF 27

## 9.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

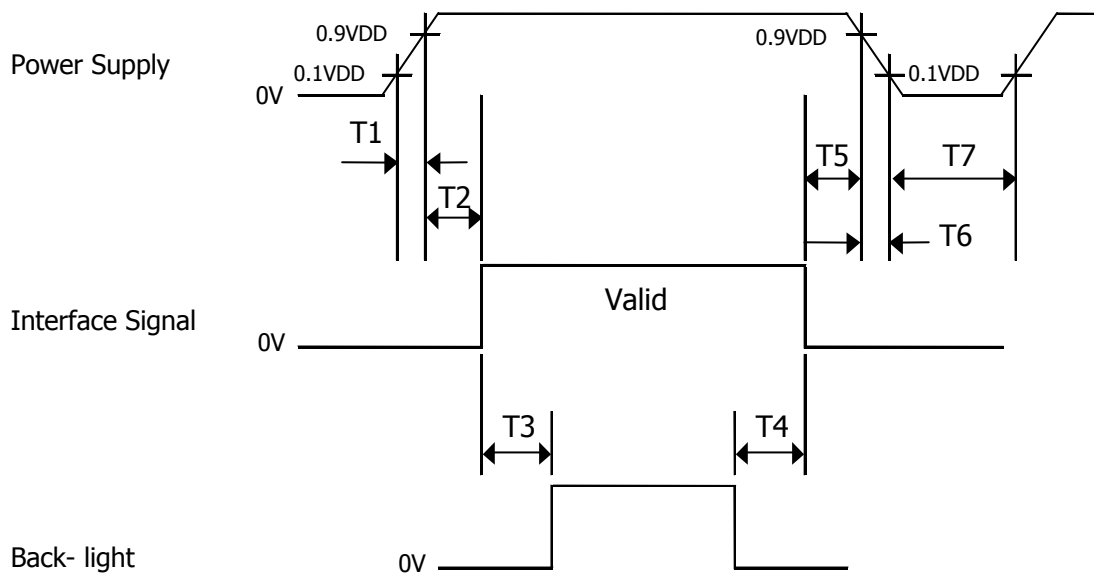

- $T1 \leq 10 \text{ ms}$
- $0 \leq T2 \leq 50 \text{ ms}$
- $200\text{ms} \leq T3$
- $0 \leq T4$
- $0 \leq T5$
- $0 \leq T6 \leq 10\text{ms}$
- $150\text{ms} \leq T7$

Notes : 1. When the power supply VDD is 0V, Keep the level of input signals on the low or keep high impedance.

2. Do not keep the interface signal high impedance when power is on.  
Back Light must be turn on after power for logic and interface signal are valid.

**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**10.0 MECHANICAL CHARACTERISTICS****10.1 Dimensional Requirements**

FIGURE 5 (located in Appendix) shows mechanical outlines for the model HV150UX1-101. Other parameters are shown in Table 11.

&lt;Table 11. Dimensional Parameters&gt;

| Parameter           | Specification                                       | Unit |
|---------------------|---|------|
| Dimensional outline | $317.3 \pm 0.5 \times 242.0 \pm 0.5 \times 6.5$ max | mm   |
| Weight              | 540g (typ.)   | gram |
| Back-light          | Connector : BHSR-02VS-1                             |      |
|                     | CCFL, Horizontal & Bottom side lamp type            |      |
|                     | Lamp wire Length : $85.0 \pm 5.0$                   | mm   |

**10.2 Mounting**

See FIGURE 5. (shown in Appendix)

**10.3 Anti-Glare and Polarizer Hardness.**

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

**10.4 Light Leakage**

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

SPEC. NUMBER  
S864-1254

SPEC TITLE  
HV150UX1-101 Product Specification for Customer

PAGE  
20 OF 27

**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**11.0 RELIABILITY TEST**

The Reliability test items and its conditions are shown in below.

&lt;Table 12. Reliability test&gt;

| No | Test Items                                       | Conditions  |
|----|--|---|
| 1  | High temperature storage test                    | Ta = 60 °C, 240 hrs                                       |
| 2  | Low temperature storage test                     | Ta = -20 °C, 240 hrs                                      |
| 3  | High temperature & high humidity operation test  | Ta = 50 °C, 80%RH, 240hrs                                 |
| 4  | High temperature operation test                  | Ta = 50 °C, 240hrs  |
| 5  | Low temperature operation test                   | Ta = 0 °C, 240hrs   |
| 6  | Thermal shock                                    | Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle                   |
| 7  | Vibration test<br>(non-operating)                | 1.5G, 10~300Hz for X,Y,Z axis<br>30 minutes for each axis |
| 8  | Shock test<br>(non-operating)                    | 220G, 2msec, half sine (6 times)                          |
| 9  | Electro-static discharge test<br>(non-operating) | Air : 150 pF, 330Ω, 15 KV<br>Contact : 150 pF, 330Ω, 8 KV |

SPEC. NUMBER  
S864-1254SPEC TITLE  
HV150UX1-101 Product Specification for CustomerPAGE  
21 OF 27



**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**12.0 HANDLING & CAUTIONS**

- (1) Cautions when taking out the module
  - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module
  - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
  - As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
  - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
  - Do not pull the interface connector in or out while the LCD module is operating.
  - Put the module display side down on a flat horizontal plane.
  - Handle connectors and cables with care.
- (3) Cautions for the operation
  - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
  - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- (4) Cautions for the atmosphere
  - Dew drop atmosphere should be avoided.
  - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics
  - Do not apply fixed pattern data signal to the LCD module at product aging.
  - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions
  - Do not disassemble and/or re-assemble LCD module.
  - Do not re-adjust variable resistor or switch etc.
  - When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

SPEC. NUMBER  
S864-1254


SPEC TITLE  
HV150UX1-101 Product Specification for Customer

PAGE  
22 OF 27


## 13.0 PACKING INFORMATION

### 13.1 Packing order

Put Pad into the box.

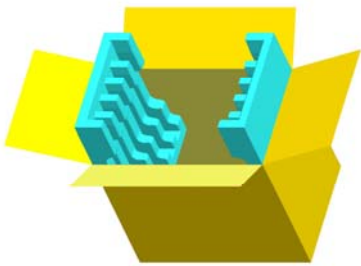


Put silica gels in the box.




After sealing the box, attach Packing Label on the attach position sign area of the box.



Place a cover on the top of the box.

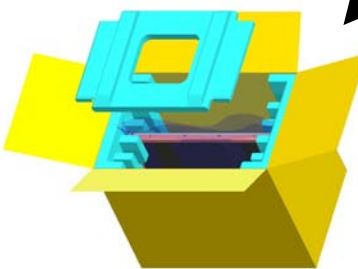

As shown in the figure, place the Modules bundled by shielding bag in the box.

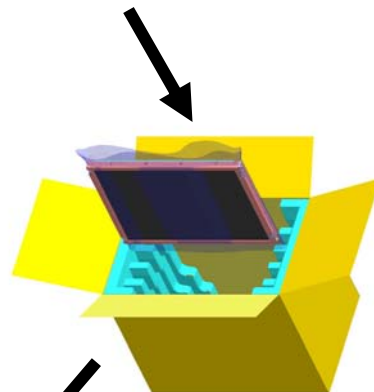

### 13.2 Notes

- Box Dimension: 333mm(W)X 333mm(D)X 435(H)
- Package Quantity in one Box: 10pcs



**PRODUCT GROUP**

REV

ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

**14.0 Label**

**14.1 Packing Label**

● Label size : 108 mm (L) X 56 mm (W)

● Contents


Model : HV150UX1-101

Q'ty : Module Q'ty in one box

Serial No. : Box Serial No. See next figure for detail description

Date : Packing Date

FG Code : FG Code of Product

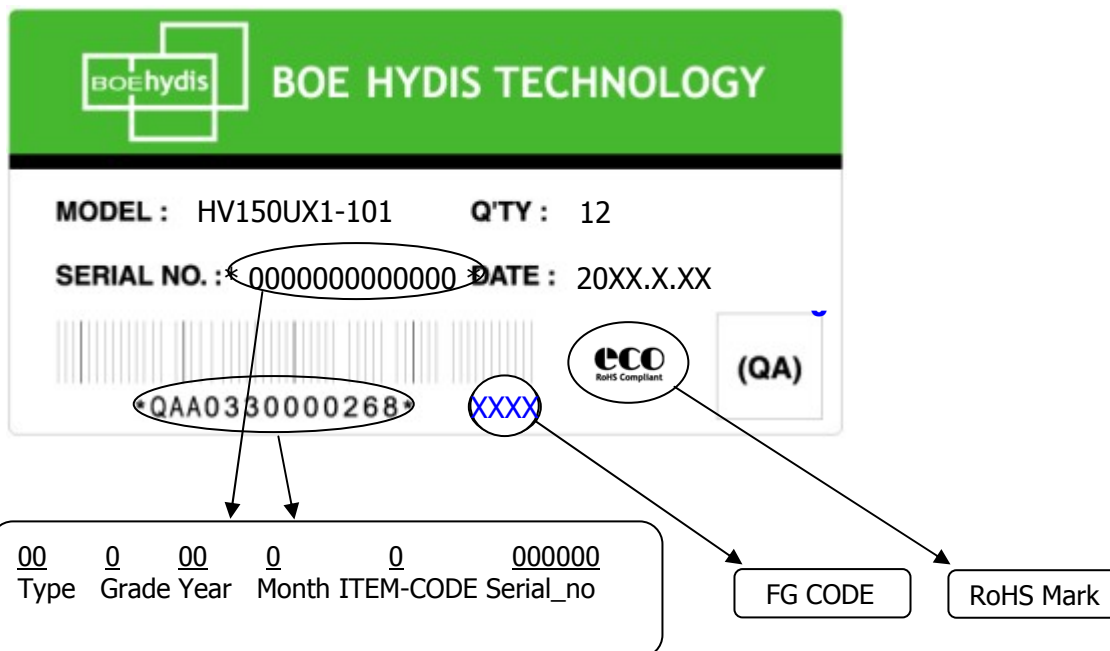

**14.2. High voltage caution label**

|  |  |   |
|--|--|---|
|  | HIGH VOLTAGE<br>CAUTION  | COLD CATHODE FLUORESCENT LAMP IN LCD<br>PANEL CONTAINS A SMALL AMOUNT<br>OF MERCURY. PLEASE FOLLOW LOCAL OR-<br>DINANCES OR REGULATIONS FOR DISPOSAL. |
|  | RISK OF ELECTRIC SHOCK.<br>DISCONNECT THE ELECTRIC<br>POWER BEFORE SERVICING |   |

|                           |   |                  |
|---------------------------|---|------------------|
| SPEC. NUMBER<br>S864-1254 | SPEC TITLE<br>HV150UX1-101 Product Specification for Customer | PAGE<br>24 OF 27 |
|---------------------------|---|------------------|





### PRODUCT GROUP

REV


ISSUE DATE

TFT LCD PRODUCT

A

2006.05.04

### 14.3. Product Label

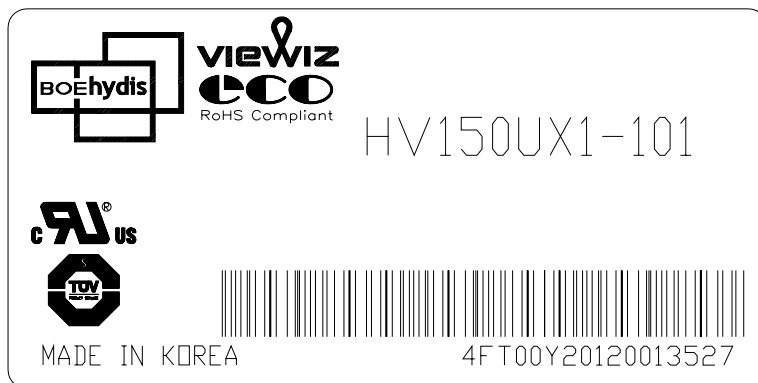

#### 14.3.1 BOE HYDIS Barcode

|     |   |   |   |   |       |           |
|-----|---|---|---|---|-------|-----------|
| 1   | 2 | 3 | 4 | 5 | 6     | 7         |
| X X | X | X | X | X | X X X | X X X X X |

#### Type Designation

No 1. Control number

No 2. Rank / Grade

No 3. Company (H : BOE HYDIS, O : BOE OT

No 4. Year (4 : 2005, 5 : 2005, ... )

No 5. Month (1, 2, 3, ... , 9, X, Y, Z)

No 6. Product Identification


No 7. Serial Number

SPEC. NUMBER  
S864-1254

SPEC TITLE  
HV150UX1-101 Product Specification for Customer

PAGE  
25 OF 27

**Figure 5. TFT-LCD Module Outline Dimension (Front View)**

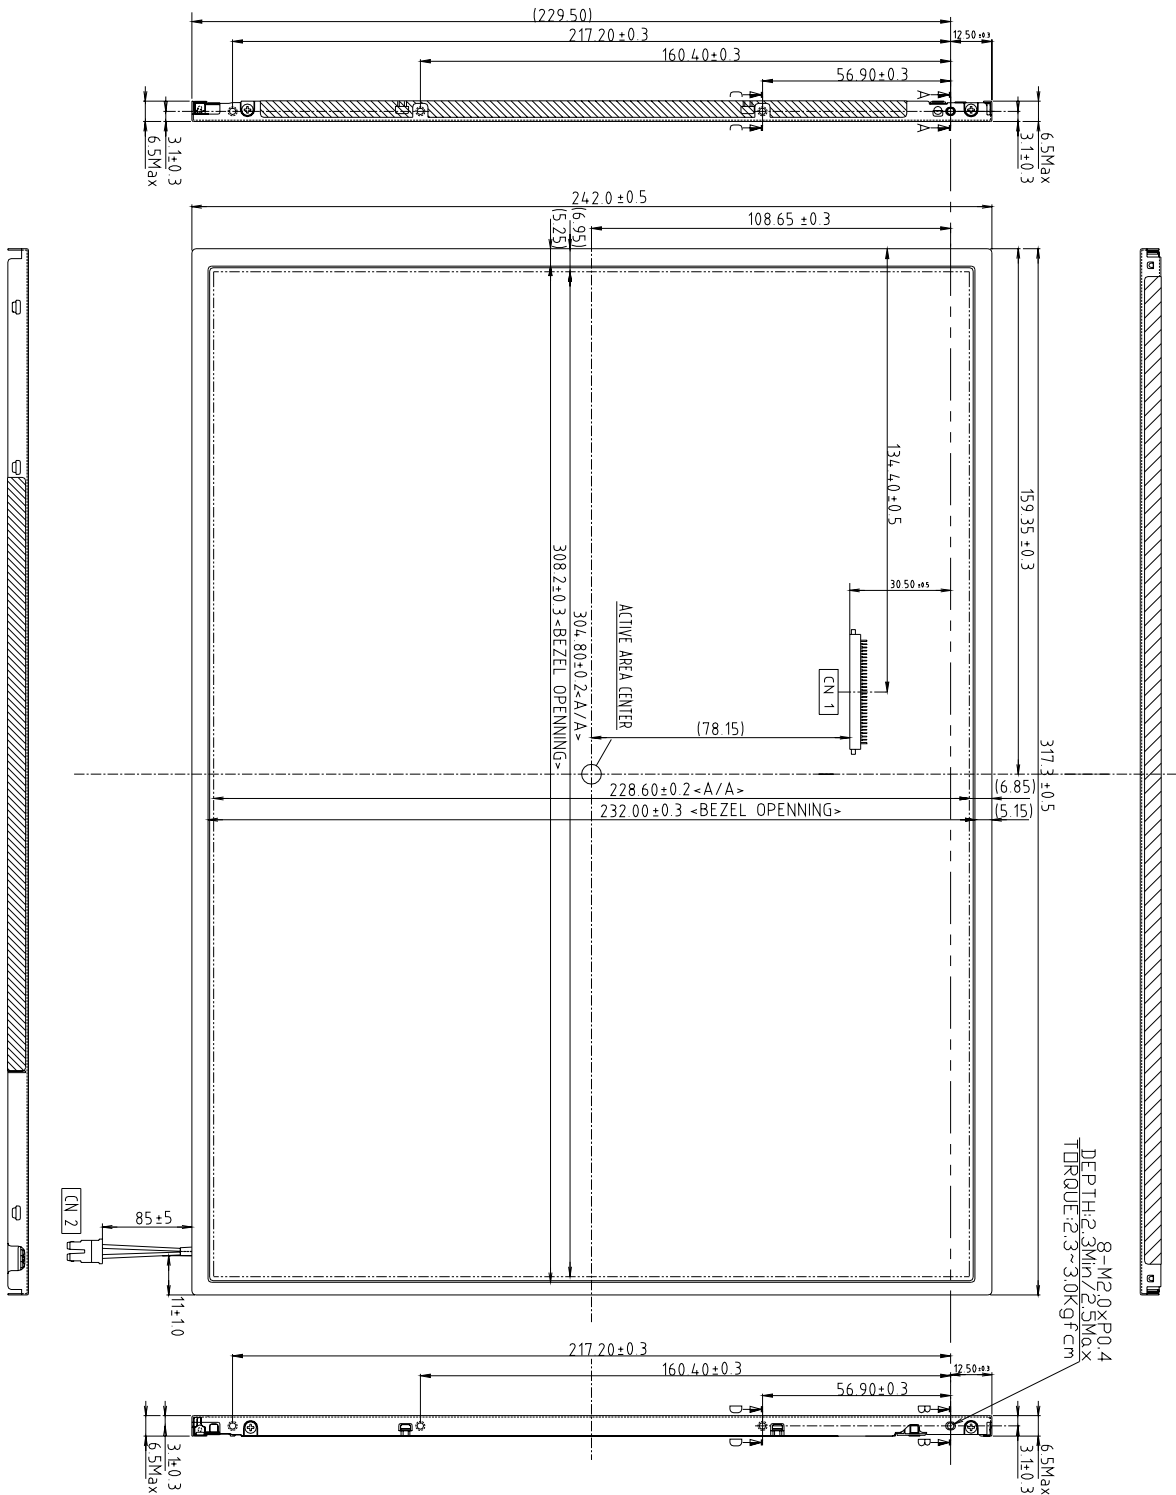


SPEC. NUMBER  
S864-1254

SPEC TITLE  
HV150UX1-101 Product Specification for Customer

PAGE  
26 OF 27

**Figure 6. TFT-LCD Module Outline Dimensions (Rear view)**

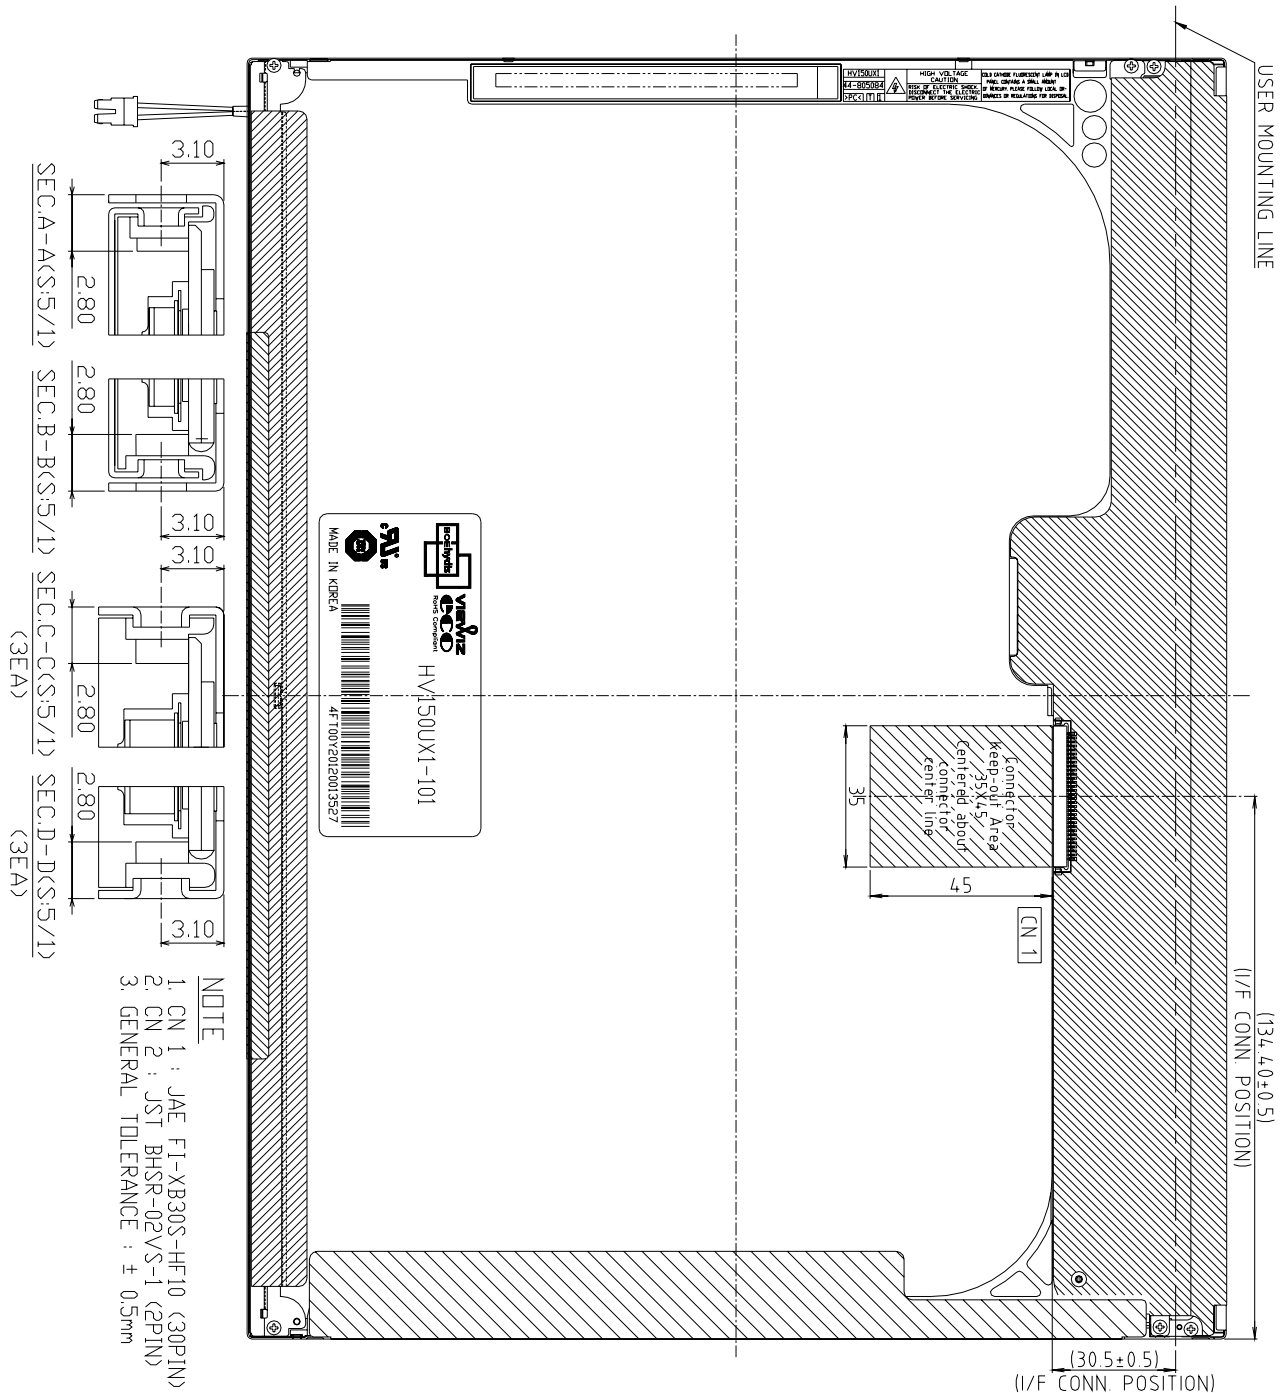

SPEC. NUMBER  
S864-1254

SPEC TITLE  
HV150UX1-101 Product Specification for Customer

PAGE  
27 OF 27