


#### ■ Features

- Landscape, 5.7 inch VGA resolution.
- High outdoor readability with low backlight power.
- Super Slim / Super Light LCD monitor using long-life LED.
- Wide viewing angle LCD monitor.
- All-In-One TFT-LCD monitor with built-in backlight and LCD driving circuit.

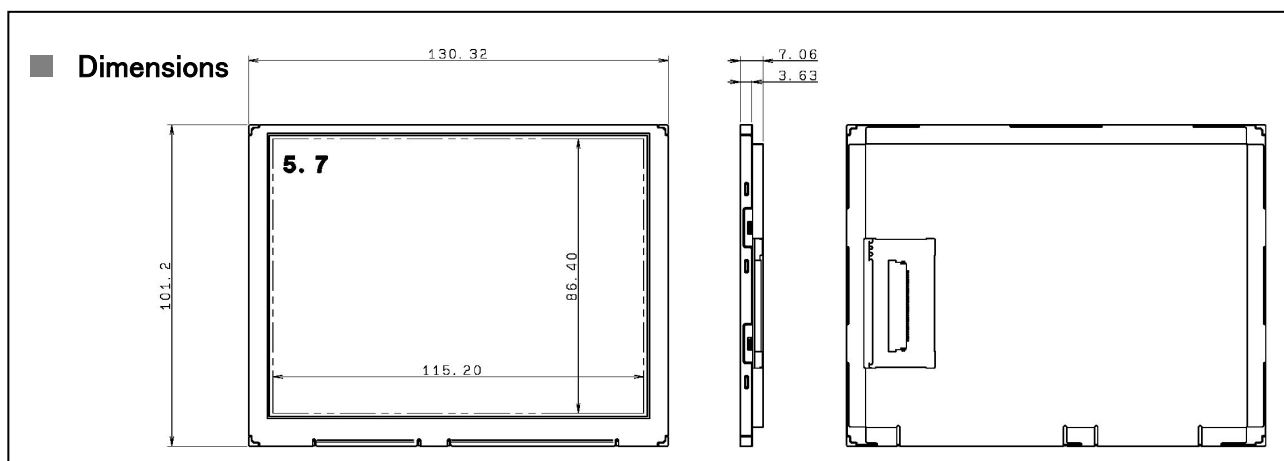

#### ■ Specifications

RoHS compliant

Items	Specifications	Units	Notes
Display Size	14.4 (5.7)	cm (inch)	
Display Format	640 X RGB X 480 Stripe	--	
Dot Pitch	60.00(H) X 180.00(V)	μm	
Outline Dimensions	130.32 (H) X 101.2 (V) X 7.06 (D)	mm	
Weight	122.0	g	
Number of Colors	262,144	--	
Brightness	460 (TYP)	cd/m <sup>2</sup>	
Viewing Angle(U/D/L/R)	80/80/80/80	deg.	CR ≥ 10
Input Signal Type	Digital RGB signal (each 6 bit parallel)	--	
Power Supplies	3.3/12.0 (for B/L)	V	
Operating Temperature	-20 ~ +70	°C	
Storage Temperature	-30 ~ +80	°C	
Backlight	LED Backlight	--	
Remarks			

※ Specifications are subject to change without notice.

April 1, 2010

## ORTUS TECHNOLOGY CO., LTD.

Sales HQ, Overseas Sales Dept.

2951-5 Ishikawa-machi, Hachioji City, Tokyo 192-8556, Japan  
 TEL +81-42-639-5121 FAX +81-42-639-5034

<http://www.ortustech.co.jp>

All Rights Reserved, Copyright (C) ORTUS TECHNOLOGY CO., LTD.

Contact