



Chunghwa Picture Tubes, Ltd.

Product Specification

To : Data-Modul

Date : 120808

TFT LCD

CLAA070NJ01CW

ACCEPTED BY :

V 0.2

| APPROVED BY | CHECKED BY | PREPARED BY |
|-------------|------------|-------------|
| 鍾昭玟 | 李家銘 | 陳威 |

Prepared by :

Product Planning Management Division

Consumer Electronic Business Unit

CHUNGHWA PICTURE TUBES, LTD.

1127 Hopin Rd., Padeh, Taoyuan, Taiwan 334, R.O.C.

TEL: +886-3-3675151 FAX: +886-3-377-3858

| | |
|--|-------------------------------|
| Doc.No: SPEC_CLAA070NJ01CW_V0.2_Data-Modul_120808 | Issue Date: 2012/07/23 |
|--|-------------------------------|

CONTENTS

| | |
|--|-----------|
| 1. OVERVIEW | 4 |
| 2. ABSOLUTE MAXIMUM RATINGS..... | 5 |
| 3. ELECTRICAL CHARACTERISTICS | 6 |
| 3.1 Typical Operation Conditions | 6 |
| 3.2 Current consumption..... | 7 |
| 3.3 Power 、 Signal Sequence | 7 |
| 3.5 Timing Sequence(Timing Chart) | 8 |
| 3.5.1 Horizontal Timing Sequence | 8 |
| 3.5.2 Vertical Timing Sequence | 8 |
| 3.5.3 LVDS Input Data Mapping..... | 9 |
| 3.6 Backlight..... | 10 |
| 4. INTERFACE CONNECTION | 11 |
| 4.1 CN1 (Input Signal) | 11 |
| 5. MECHANICAL DIMENSIONC..... | 13 |
| 5.1 Front Side | 13 |
| 5.2 Rear Side..... | 14 |
| 6. OPTICAL CHARACTERISTICS | 15 |
| 7. RELIABILITY TEST..... | 17 |
| 7.1 Temperature and Humidity | 17 |
| 7.2 Shock and Vibration..... | 17 |
| 7.3 Electrostatic Discharge | 17 |
| 7.4 Judgment Standard..... | 18 |
| 8. PACKING | 18 |
| 9. WARRANTY | 18 |

1. OVERVIEW

CLAA070NJ01CW is 7.0" color TFT-LCD (Thin Film Transistor Liquid Crystal Display) module composed of LCD panel, driver ICs, control circuit and LED backlight. By applying 1024×600 images are displayed on the 7.0" diagonal screen. Display 16.7M colors by R.G.B signal input.

General specifications are summarized in the following table :

| ITEM | SPECIFICATION | | | |
|---------------------------------|---|-------|-------|-------|
| Display Area (mm) | 154.2144(H) × 85.92(V) | | | |
| Number of Pixels | 1024(H) × 3(RGB) × 600(V) | | | |
| Pixel Pitch (mm) | 0.1506(H) × 0.1432(V) | | | |
| Color Pixel Arrangement | RGB vertical stripe | | | |
| Display Mode | Normally White | | | |
| Number of Colors | 16.7M | | | |
| Viewing Direction | 6 o'clock (Max. contrast ratio, Gray level inversion) | | | |
| Brightness (cd/m ²) | 550nits(typ)/500nits(min) | | | |
| Response Time (ms) | 25(typ.) | | | |
| NTSC | 50% | | | |
| Contrast Ratio | 800(typ) ; 600 (min) | | | |
| Viewing Angle (CR ≥ 10) | 160degree (Horizontal.) | | | |
| | 130degree (Vertical) | | | |
| Power Consumption (W) | 2.823W(Typ) | | | |
| Inversion | Dot | | | |
| Interface connection | LVDS | | | |
| Module Size (mm) | | Min. | Typ. | Max |
| | Horizontal (H) | 164.6 | 164.9 | 165.2 |
| | Vertical (V) | 99.7 | 100 | 100.3 |
| | Depth (D) | 3.1 | 3.4 | 3.7 |
| Module Weight (g) | 120 (typ) | | | |
| Backlight Unit | LED | | | |
| Surface Treatment | Anti-Glare | | | |

2. ABSOLUTE MAXIMUM RATINGS


The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

| Item | Symbol | Min. | Max. | Unit | Note |
|-----------------------------------|---|------|-------|------|------------|
| Digital Supply Voltage | DVDD DVDD_LVDS | -0.3 | 3.96 | V | |
| Analog Supply Voltage | AVDD | -0.5 | 14.85 | V | |
| Gate On Voltage | VGH | -0.3 | 40 | V | |
| Gate Off Voltage | VGL | -20 | 0.3 | V | |
| Gate On-Gate Off Voltage | VGH-VGL | 12 | 40 | V | |
| Signal Input Voltage | NIND0 ~ NIND3 PIND0 ~ PIND3 NINC,PINC | -0.5 | 5 | V | |
| Forward Current (per LED) | I _f | - | 30 | mA | |
| Reverse Voltage (per LED) | VR | - | 5 | V | |
| Pulse Forward Current (Per LED) | I _{fp} | - | 100 | mA | Note 1 · 2 |
| Operating Temperature | Topa | -20 | 70 | °C | Note 3 |
| Storage Temperature | Tstg | -30 | 80 | °C | Note 3 |

Note1 : I_{fp} Conditions : Pulse Width \leq 10msec ; Duty \leq 1/10

Note2 : perating must under the condition as below drawing.

(Ambient Temperature /Allowable Forward Current) Each LED .

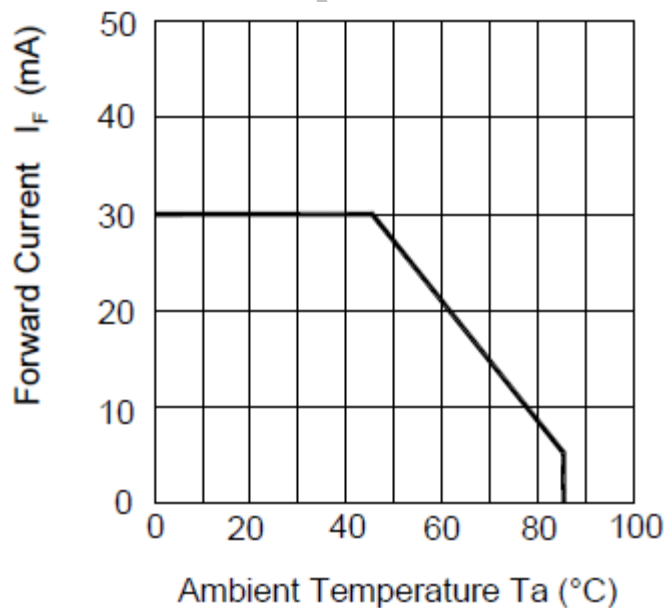

Note3 : If users use the product out off the environmmental operation range (temperature and humidity, it will have visual quality concerns.


3. ELECTRICAL CHARACTERISTICS

3.1 Typical Operation Conditions

Ta=25°C

| ITEM | SYMBOL | MIN | TYP | MAX | UNIT | NOTE |
|--------------------------------------|--------|-------------------|-----|-------------------------|------|-------------------|
| Digital Power Supply Voltage For LCD | DVDD | 3 | 3.3 | 3.6 | V | |
| Logic Input Voltage (LVDS:IN+,IN-) | VCM | $\frac{ VID }{2}$ | - | $2.4 - \frac{ VID }{2}$ | V | Note1 |
| | VID | 200 | - | 600 | mV | Note1 |
| | VTH | - | - | 100 | mV | VCM=1.2V Note1 |
| | VTL | -100 | - | - | mV | |
| Analog Power Supply Voltage | AVDD | 9.4 | 9.6 | 9.8 | V | |
| Gate On Power Supply Voltage | VGH | 17 | 18 | 19 | V | |
| Gate Off Power Supply Voltage | VGL | -6.6 | -6 | -5.4 | V | |
| Common Power Supply Voltage | VCOM | 3.7 | 3.9 | 4.1 | V | Note2 |
| Logic Input Voltage | VIH | 0.7*DVDD | - | DVDD | V | |
| | VIL | GND | - | 0.3*DVDD | V | |

【Note1】 LVDS signal

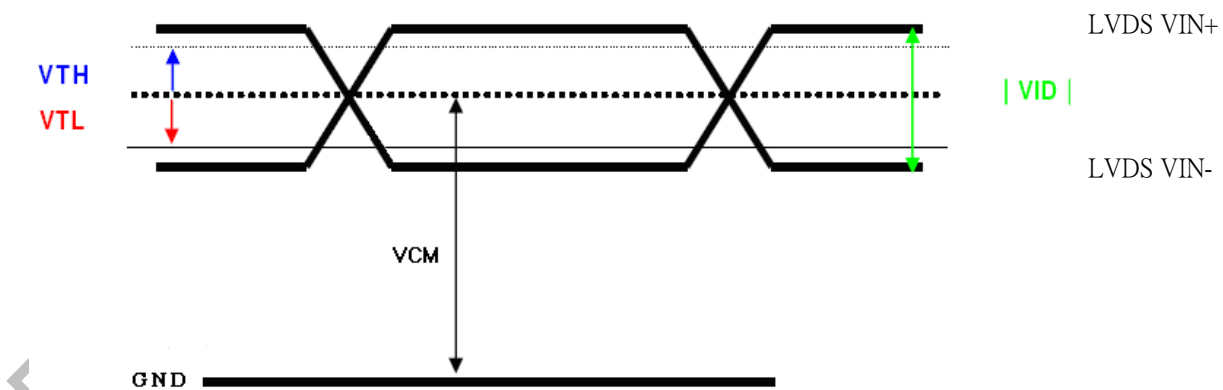

【Note2】 Please adjust VCOM to make the flicker level be minimum.


3.2 Current Consumption

| ITEM | SYMBOL | CONDITION | MIN | TYPE | MAX | UNIT | NOTE |
|-------------------------|--------|-------------|-----|------|-----|------|-------|
| Gate On Power Current | IVGH | VGH =18V | -- | 0.5 | 1 | mA | Note1 |
| Gate Off Power Current | IVGL | VGL=-6V | -- | 0.5 | 1 | mA | Note1 |
| Digital Power Current | IDVDD | DVDD = 3.3V | -- | 30 | 45 | mA | Note1 |
| Analog Power Current | IAVDD | AVDD = 9.6V | -- | 35 | 45 | mA | Note1 |
| Total Power Consumption | PC | | -- | 447 | 604 | mW | Note1 |

【Note1】 Typ. specification : Gray-level test Pattern
 Max. specification : Black test Pattern



256 gray pattern




Black Pattern

3.3 Power · Signal Sequence

Power On : DVDD→AVDD/VGL →VGH →Video & Logic Signal→Backlight

Power Off : Backlight→Video & Logic Signal→ VGH→AVDD/VGL→DVDD

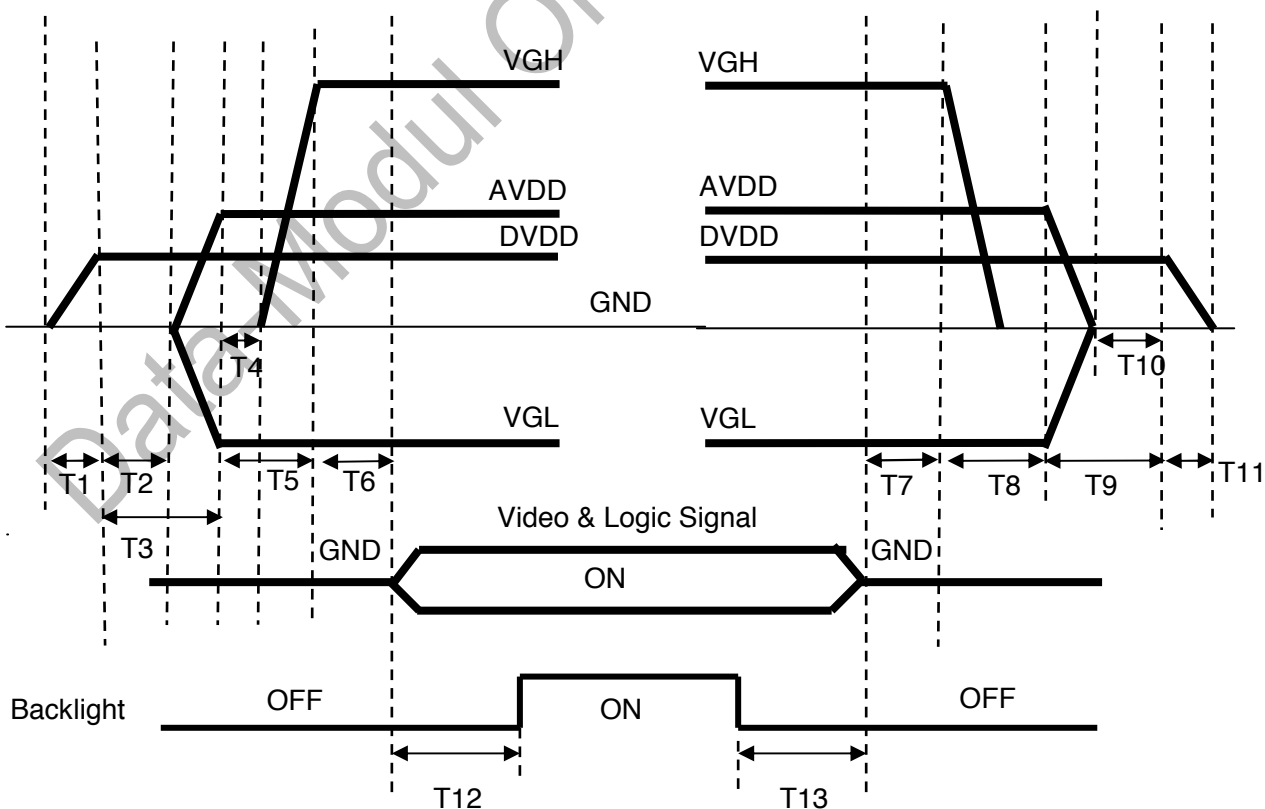

$0 < T1 \leq 10ms$

$T2 > 0ms$

$T3 > 20ms$

$T4 > 0ms$

$T5 > 10ms$

$0 < T6 \leq 10ms$

$T12 \geq 200ms$

$T7 > 0ms$

$T8 > 0ms$

$T9 > 0ms$

$T10 > 0ms$

$0 < T11 \leq 10ms$


$T13 \geq 200ms$

3.4 Timing Characteristics of Input Signals


| ITEM | | SYMBOL | MIN | TYP | MAX | UNIT | |
|---|---------------|---------------------------|-----------------|------|------|------|----------------|
| LVDS input signal sequence | CLK Frequency | tclk | 45 | 51.2 | 57 | MHz | |
| LCD input signal sequence (Input LVDS Transmitter) | Horizontal | Horizontal total Time | t _H | 1324 | 1344 | 1364 | tCLK |
| | | Horizontal effective Time | t _{HA} | 1024 | | | tCLK |
| | | Horizontal Blank Time | t _{HB} | 300 | 320 | 340 | tCLK |
| | Vertical | Vertical total Time | t _V | 625 | 635 | 645 | t _H |
| | | Vertical effective Time | t _{VA} | 600 | | | t _H |
| | | Vertical Blank Time | t _{VB} | 25 | 35 | 45 | t _H |

3.5 Timing Sequence(Timing Chart)

3.5.1 Horizontal Timing Sequence

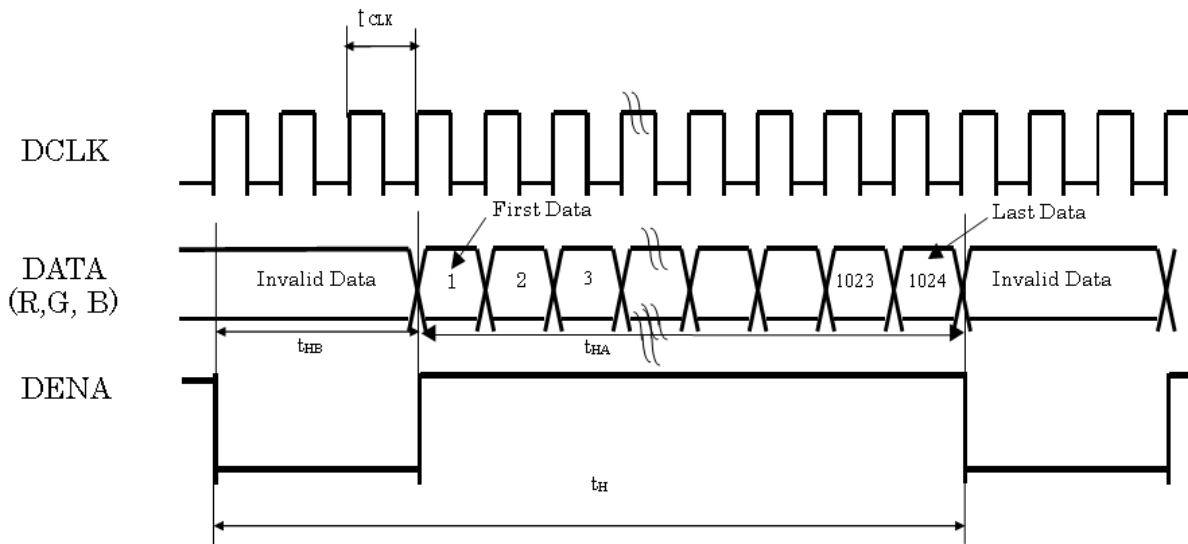


3.5.2 Vertical Timing Sequence

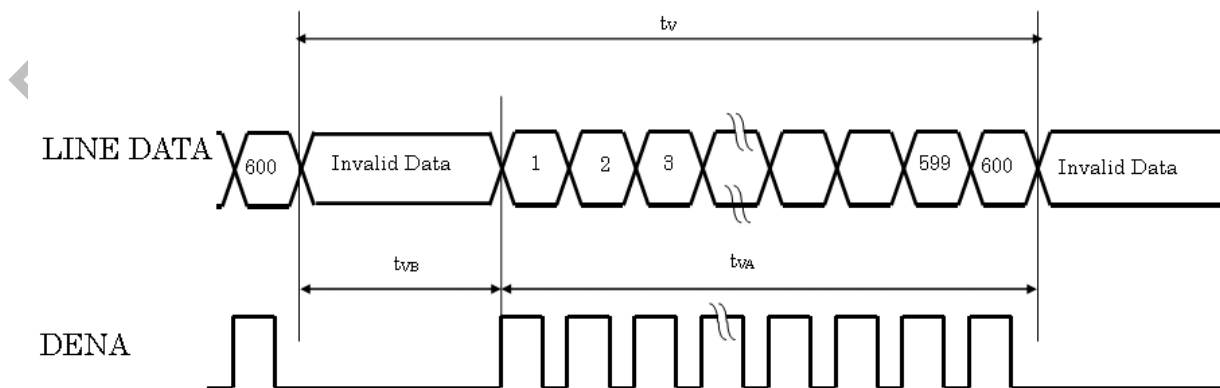


3.5.3 LVDS Input Data Mapping

6bits LVDS Input

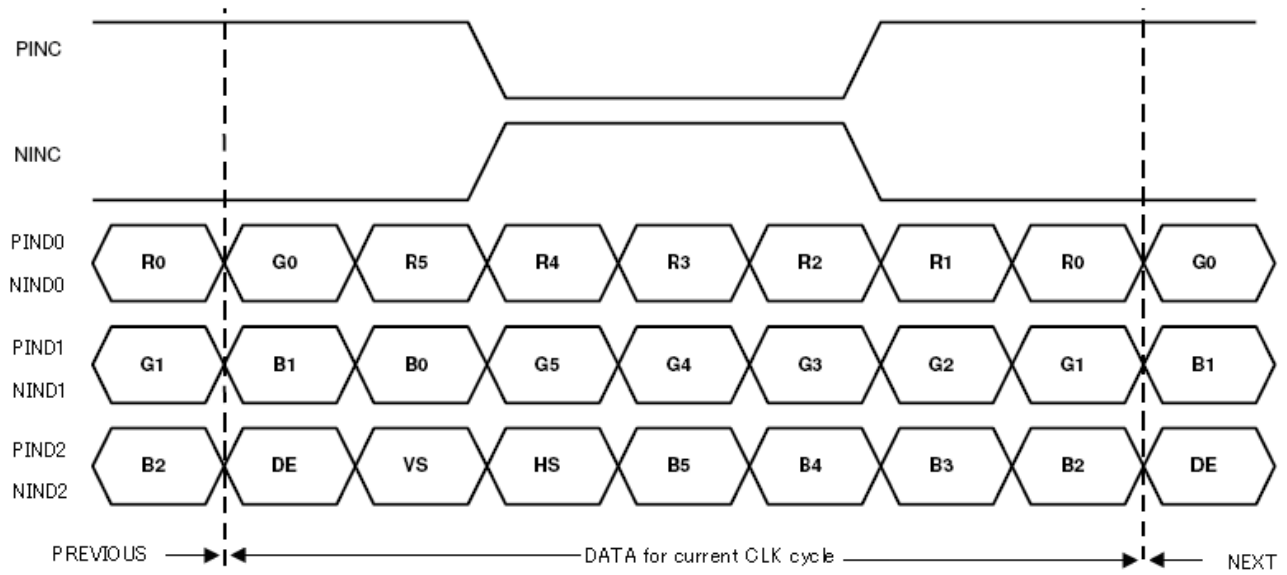

8bits LVDS Input

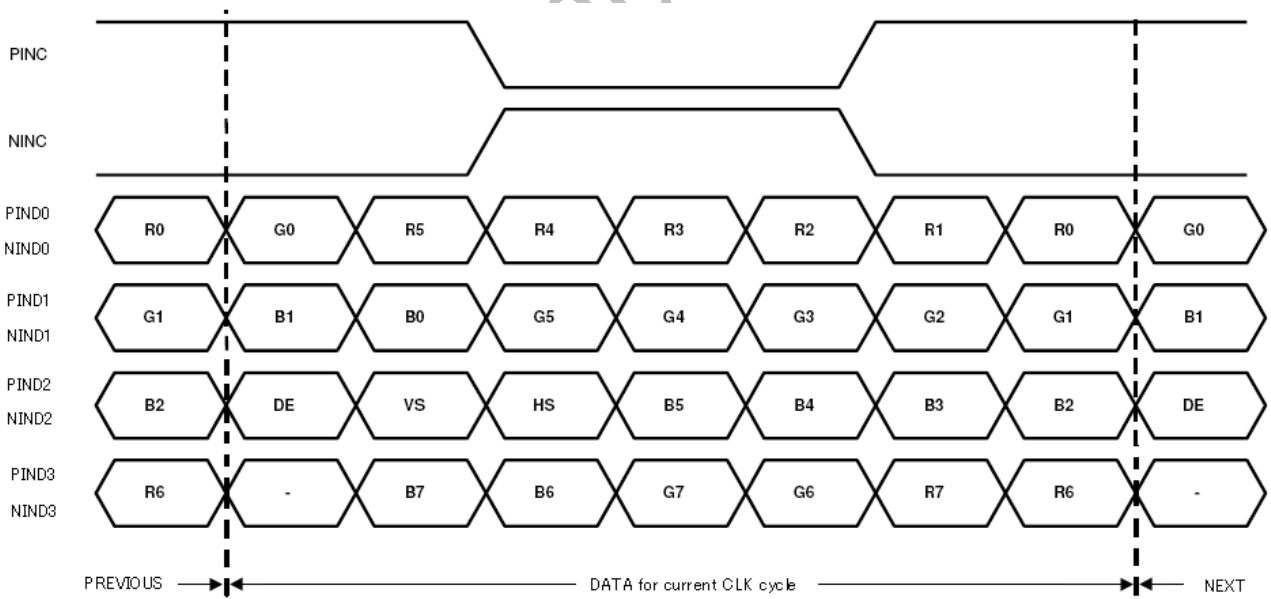


3.6 Backlight

Ta=25°C

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT |
|-------------------|--------|-----------------------------|-------|-------|------|------|
| LED Current | IL | Ta=25°C Each serial=20mA | - | 120 | - | mA |
| LED Voltage | VL | Ta=25°C Each serial=20mA | 17.7 | 19.8 | 21.3 | V |
| Power Consumption | WL | Ta=25°C Each serial=20mA | - | 2.376 | - | W |
| LED Lifetime | - | Ta=25°C Each serial=20mA | 20000 | | | Hr |

【Note】

*1)LED Circuit Diagram :

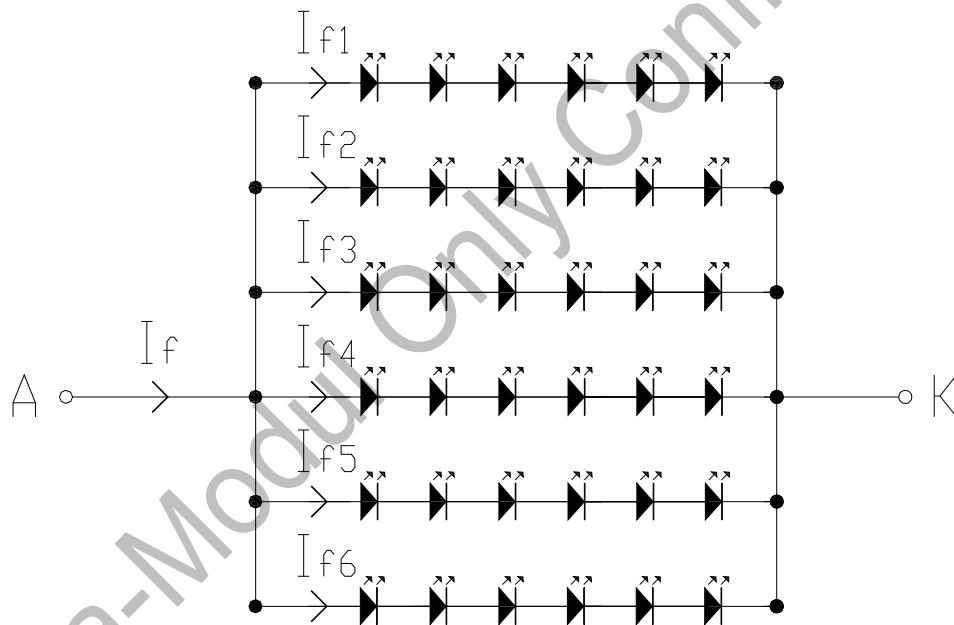

*2) A : Anode(+) , K : Cathode(-)

*3) LED control suggested fixed current.

*4) Definition of the LED life time : Luminance will decay less than 50%

4. INTERFACE CONNECTION

4.1 CN1 (Input Signal)

| Pin No. | SYMBOL | FUNCTION | Remark |
|---------|--------|---|--------|
| 1 | VCOM | Common Voltage | |
| 2 | DVDD | Digital Power | |
| 3 | DVDD | Digital Power | |
| 4 | NC | Not Connect | |
| 5 | RESET | Global reset pin. Active low to enter reset state. Suggest to connecting with an RC reset circuit for stability. Normally pull high. (R=10KΩ · C=0.1μF) | |
| 6 | STBYB | Standby mode, normally pull high STBYB="1", normal operation STBYB="0", timing control, source driver will turn off, all output are high-Z | |
| 7 | GND | Ground | |
| 8 | NIND0 | Negative LVDS differential data input | |
| 9 | PIND0 | Positive LVDS differential data input | |
| 10 | GND | Ground | |
| 11 | NIND1 | Negative LVDS differential data input | |
| 12 | PIND1 | Positive LVDS differential data input | |
| 13 | GND | Ground | |
| 14 | NIND2 | Negative LVDS differential data input | |
| 15 | PIND2 | Positive LVDS differential data input | |
| 16 | GND | Ground | |
| 17 | NINC | Negative LVDS differential clock input | |
| 18 | PINC | Positive LVDS differential clock input | |
| 19 | GND | Ground | |
| 20 | NIND3 | Negative LVDS differential data input | |
| 21 | PIND3 | Positive LVDS differential data input | |
| 22 | GND | Ground | |
| 23 | NC | Not Connect | |
| 24 | NC | Not Connect | |
| 25 | GND | Ground | |
| 26 | NC | Not Connect | |
| 27 | NC | Not Connect | |
| 28 | SELB | 6bit/8bit Mode Select | *1) |
| 29 | AVDD | Power for Analog Circuit | |
| 30 | GND | Ground | |
| 31 | LED- | LED Cathode | |
| 32 | LED- | LED Cathode | |
| 33 | SHLR | Horizontal Inversion | *2) |
| 34 | UPDN | Vertical Inversion | *2) |
| 35 | VGL | Negative Power for TFT | |
| 36 | NC | Not Connect | |
| 37 | NC | Not Connect | |
| 38 | VGH | Positive Power for TFT | |
| 39 | LED+ | LED Anode | |
| 40 | LED+ | LED Anode | |

Remarks :


- *1)if LVDS input data is 6bits,SELB must must be set to High
if LVDS input data is 8bit , SELB must be set to Low

*2)UPDN and SHLR control function

| UPDN | SHLR | FUNCTION |
|------|------|---|
| 0 | 1 | Normal Display |
| 0 | 0 | Inverse Left and Right |
| 1 | 1 | Inverse Up and Down |
| 1 | 0 | Inverse Left and Right Inverse Up and Down |

| SHLR | UPDN | Data shifting |
|------|------|-------------------------------|
| DVDD | GND | Left→Right · Up→Down(default) |
| GND | GND | Right→Left · Up→Down |
| DVDD | DVDD | Left→Right · Down→Up |
| GND | DVDD | Right→Left · Down→Up |


Definition of scanning direction.

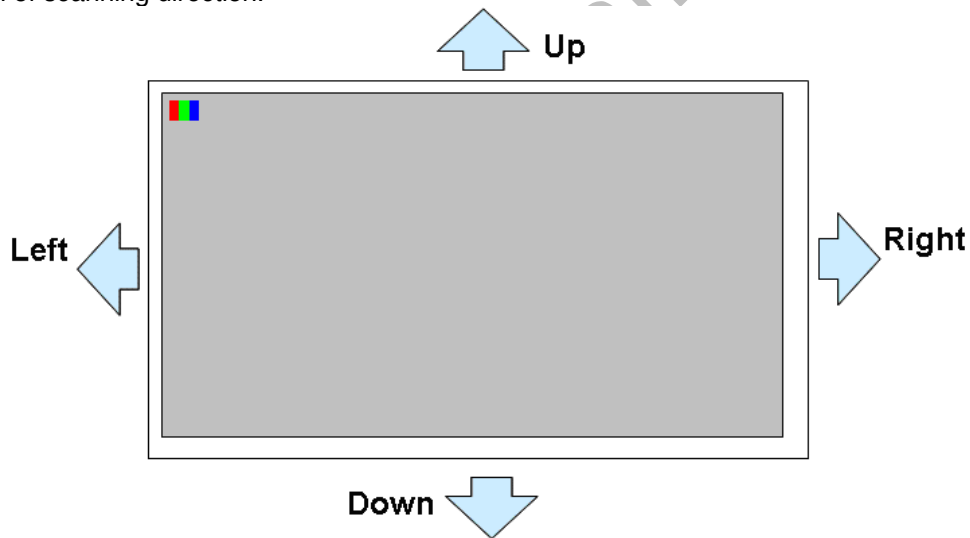

5. MECHANICAL DIMENSIONC


5.1 Front Side

(Unit : mm)

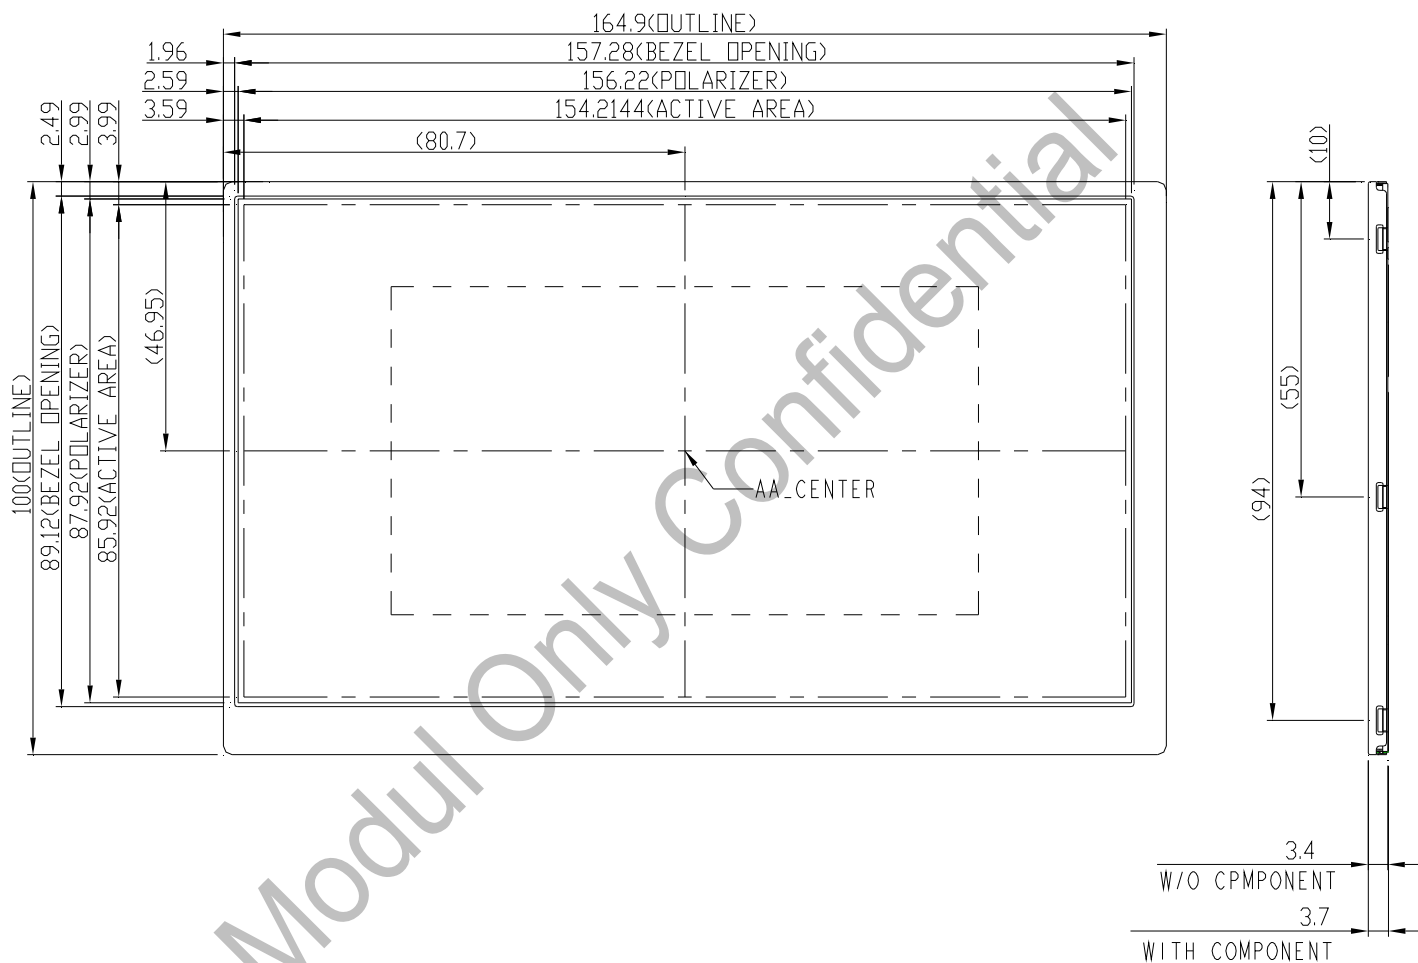

5.2 Rear Side

(Unit : mm)

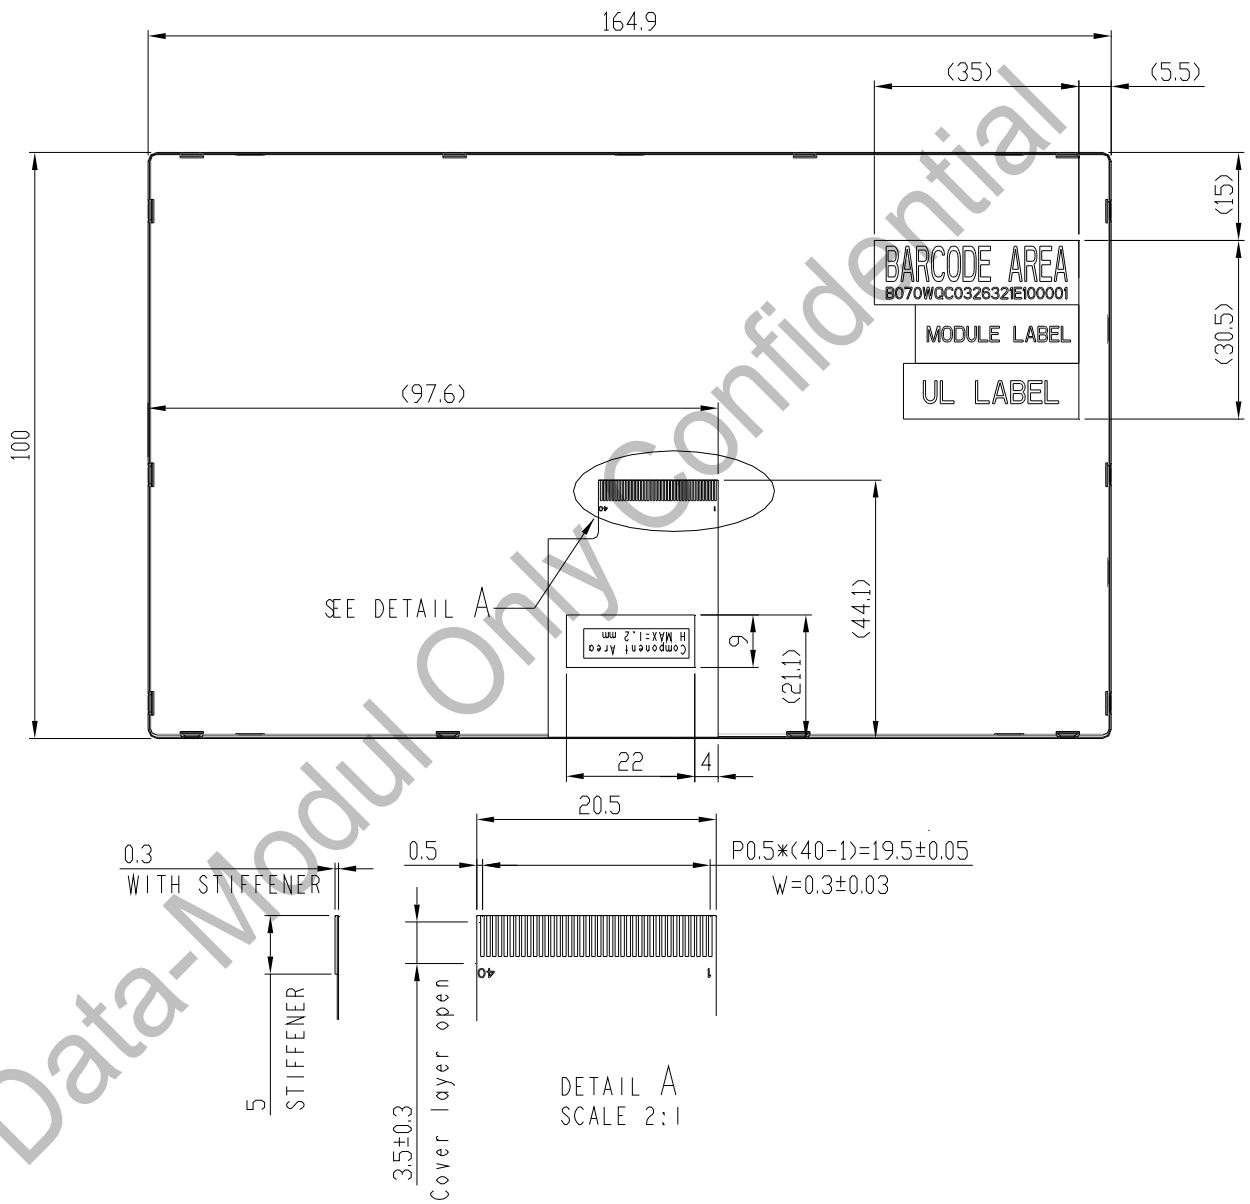

[Note] : Tolerance is ±0.3mm unless noted


6. OPTICAL CHARACTERISTICS

(Use CPT LED backlight)

Ta=25°C

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | NOTE |
|----------------------|--------|-----------|--------------------|-------|-------|-------------------|------|
| Contrast Ratio | CR | Point-5 | 600 | 800 | -- | -- | 2 |
| Response Time | Tr +Tf | Point-5 | -- | 25 | 40 | ms | 3 |
| Luminance | L | Point-5 | 500 | 550 | -- | cd/m ² | |
| Luminance Uniformity | ΔL | *2) | 70 | 80 | -- | % | |
| NTSC | | | 45% | 50% | -- | | |
| Viewing Angle | Left | φ | Point-5 CR ≥ 10 | 70 | 80 | | 4 |
| | Right | φ | | 70 | 80 | | 4 |
| | Upper | θ | | 50 | 60 | | 4 |
| | Lower | θ | | 60 | 70 | | 4 |
| MDL Chromacity | White | x | θ = φ = 0° | 0.273 | 0.313 | 0.353 | |
| | | y | | 0.289 | 0.329 | 0.369 | |
| | Red | x | θ = φ = 0° | 0.547 | 0.587 | 0.627 | |
| | | y | | 0.300 | 0.340 | 0.380 | |
| | Green | x | θ = φ = 0° | 0.303 | 0.343 | 0.383 | |
| | | y | | 0.559 | 0.599 | 0.639 | |
| | Blue | x | θ = φ = 0° | 0.118 | 0.158 | 0.198 | |
| | | y | | 0.083 | 0.123 | 0.163 | |

Note1: Measure condition : 25°C ±2°C , 60±10%RH , under10 Lux in the dark room.BM-5A (TOPCON) , viewing angle2° , IL=120 mA (Backlight current) , measurement after lighting on 10 mins.

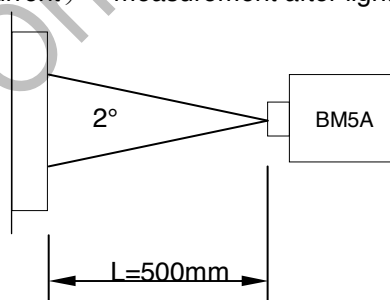

Note2: Definition of contrast ratio :

Contrast Ratio (CR)= (White) Luminance of ON ÷ (Black) Luminance of OFF

Definition of luminance : Measure white luminance on the point 5 as figure.6-1

ΔL = [L(MIN)/L(MAX)]×100

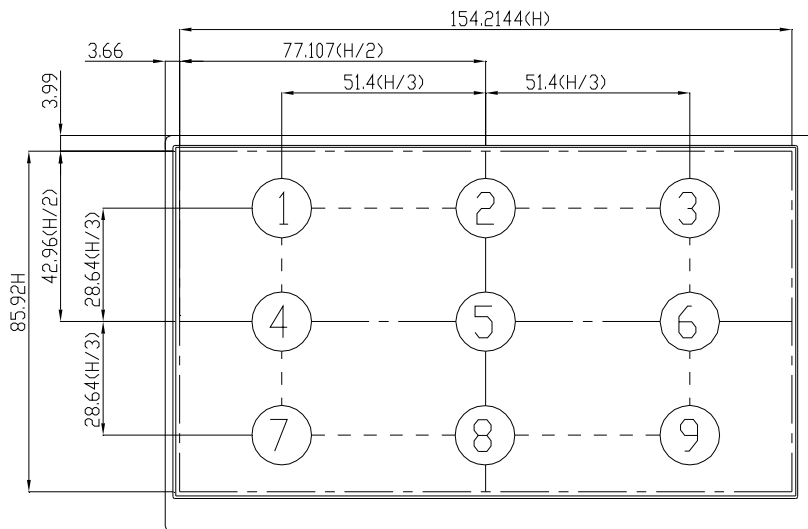


Fig. 6-1 Measuring point

Note 3: Definition of Response Time.(White-Black)

The response time is defined as the time interval between the 10% and 90% amplitudes.

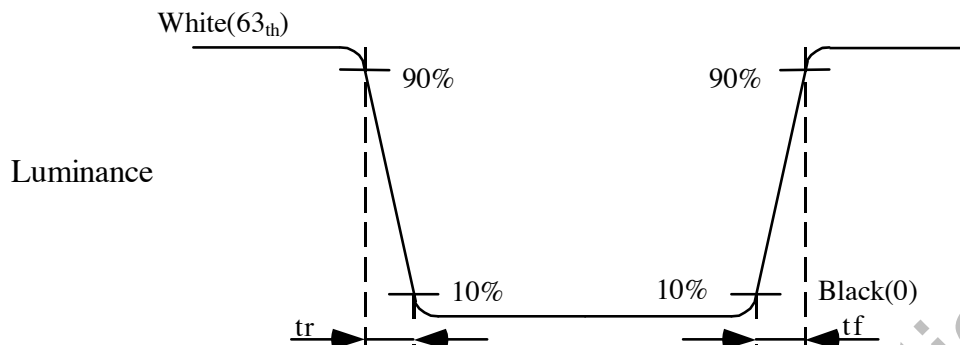


Fig. 6-2 Measuring point

Note 4: Definition of Viewing Angle(θ, ψ), refer to Fig.6 as below :

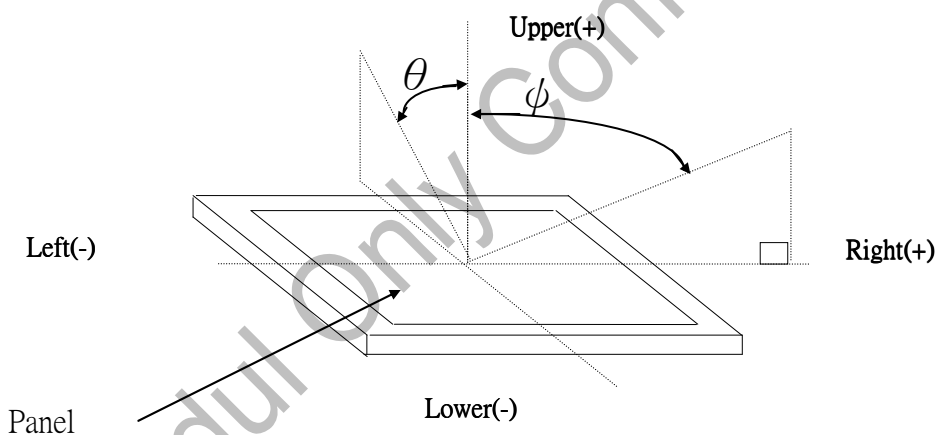


Fig.6-3 Definition of Viewing Angle

7. RELIABILITY TEST


(These tests are conducted with CPT backlight.)

7.1 Temperature and Humidity

| TEST ITEMS | CONDITIONS | NOTE |
|---|--|---------------|
| High Temperature Operation | 70°C ; 240hrs | |
| High Temperature Storage | 80°C ; 240hrs | |
| High Temperature High Humidity Operation | 60°C ; 90%RH ; 240hrs (No condensation) | |
| Low Temperature Operation | -20°C ; 240hrs | |
| Low Temperature Storage | -30°C ; 240hrs | |
| Thermal Shock | -30°C (0.5hr) ~ 80°C (0.5hr) ; 200 Cycles | Non-Operating |
| Image Sticking | 25°C ; 4hrs | 1 |
| MTBF | 200,00hrs | |

Note 1: Condition of Image Sticking test : 25 °C ± 2 °C

Operation with test pattern sustained for 4 hrs, then change to gray pattern immediately.
After 5 mins, the mura must be disappeared completely .

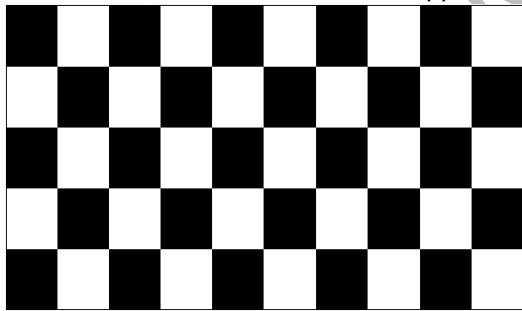

(a) Test Pattern (chess board Pattern)



(b) Gray Pattern

7.2 Shock and Vibration

| ITEMS | CONDITIONS |
|------------------------------|--|
| Shock (Non-Operation) | <ul style="list-style-type: none"> ● Shock level : 980m/s²(equal to 100G). ● Waveform : 1/2 Sine wave,6msec ● ±X , ±Y , ±Z , each axis 1 times |
| Vibration (Non-Operation) | <ul style="list-style-type: none"> ● Frequency range : 8~33.3Hz ● Stoke : 1.3 mm ● Vibration : sinusoidal wave, perpendicular axis (both x, z axis:2Hrs, y axis 4Hrs). ● Sweep : 2.9G, 33.3 Hz -400 Hz ● Cycle : 15 min |

7.3 Electrostatic Discharge

| TEST ITEM | CONDITIONS | NOTE |
|-----------|---|------|
| ESD | 150pF , 330Ω , ±8kV&±15kV Air& Contact test | 1 |
| | 200pF , 0Ω , ±200V Contact test | 2 |

Note: Measure point :

1. LCD glass and metal bezel
2. IF connector pins

7.4 Judgment Standard

The judgment of the above test should be made as follow:

Pass : Normal display image with no obvious non-uniformity and no line defect.

Partial transformation of the module parts should be ignored.

Fail : No display image, obvious non-uniformity, or line defects.

8. PACKING

TBD

9. WARRANTY

9.1 The period is within 12 months since the date of shipping out under normal using and storage conditions.

9.2 The warranty will be avoided in case of defect induced by customer.

Data-Modul Only Confidential