



PIN DEFINITION:

1	LEDK	15	G2	29	GND
2	LEDA	16	G3	30	CLK
3	GND	17	G4	31	DISP
4	VCC	18	G5	32	Hsync
5	R0	19	G6	33	Vsync
6	R1	20	G7	34	DBN
7	R2	21	B0	35	NC
8	R3	22	B1	36	GND
9	R4	23	B2	37	NC
10	R5	24	B3	38	NC
11	R6	25	B4	39	NC
12	R7	26	B5	40	NC
13	G0	27	B6		
14	G1	28	B7		

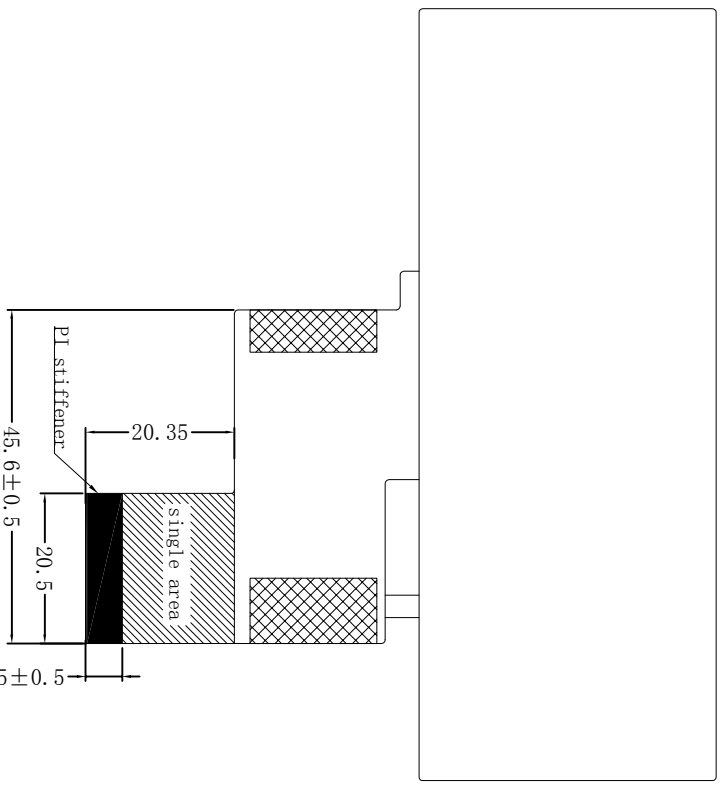

BL CIRCUIT DIAGRAM



- NOTES:**
1. DISPLAY TYPE: a-Si TFT
 2. VIEWING DIRECTION: 6:00
 3. POLARIZER MODE: TRANSMISSIVE/Normally white
 4. OPERATING TEMP.: -20° C~+70° C
 5. STORAGE TEMP.: -30° C~+80° C
 6. RoHS Compliance

DLC Display Co., Limited
www.dlcdisplay.com

DRAWN BY:	TITLE: DLC0390AZG	SCALE:	
CHECKED BY:	DWG NO.:	UNIT: mm	
APPROVED BY:	DWG NAME:	SHEET NO.:	
CONFIRMED BY:		QP	