

L3C06U-Ax LCD module


■Basic specifications

Photo		Bright 3D Drive
Technology		D9
Screen size	Diagonal	1.54cm(0.61")
	H x V (mm)	13.454×7.574
Pixel number	HxV	1922 x 1082 (1080P)
Pixel pitch	H x V (μ m)	7.0×7.0
Outside Dimension	H x V x D (mm)	20.0 x 26.1 x 5.5
Aspect Ratio		16:9
Display Colors		Monochrome
Micro Lens Array		With Micro Lens Array
Liquid Crystal		VA mode

■ Dimensional Outline Drawing

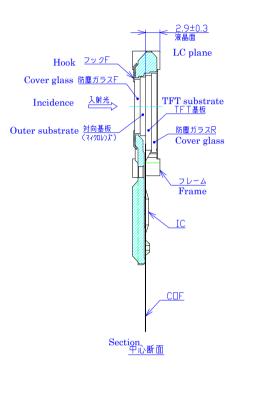


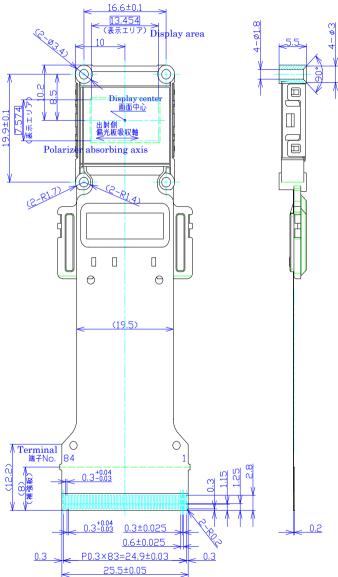

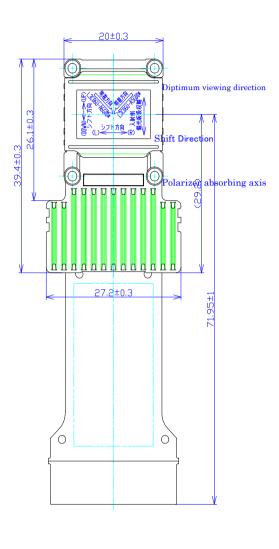


● For 3D Panel (E74A)

•external view (dimension: W240mm x H200mm)

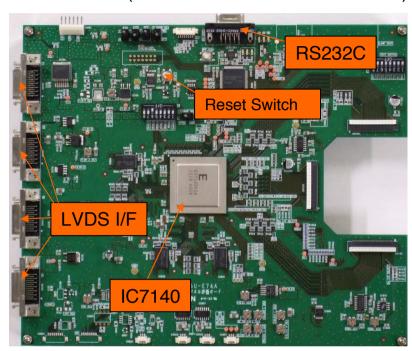

IC Block Diagram

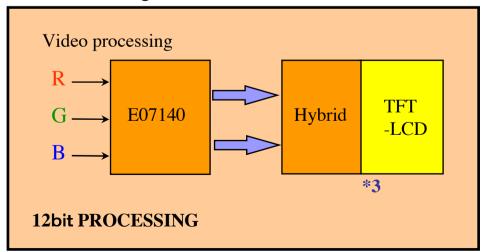

- 1)Evaluation board is accompanied by the following documents.
- "instruction book", "config file (a sheet of FD)"
- 2)LCD Panel is not attached. Please purchase it separately.
- 3)Extra preparation by customer
- a. DC stabilized power supply
- b. Video signal source (LVDS)
- c. RS232C cable (for configuration)
- d. Optical source for evaluation, polarizer etc.

Usage notice

- a. Information in these documents is subject to be changed without notice.
- b. None of the documents contained herein may be copied or reprinted, whether in full or in part, without prior notice.
- c. Mentioned contents of the document were described as of August 2012.

<Contact>

©SEIKO EPSON CORPORATION 2012

Visual Device Design & Engineering Department Visual Products Operations Division 1010 Fujimi, Fujimi-machi, Suwa-gun, Nagano-ken 399-0295 JAPAN

TEL 0266-62-6528

http://www.epson.jp/device/htps