


5.7" Passive Matrix Color LCD Module
KCS057QV1AJ-G20

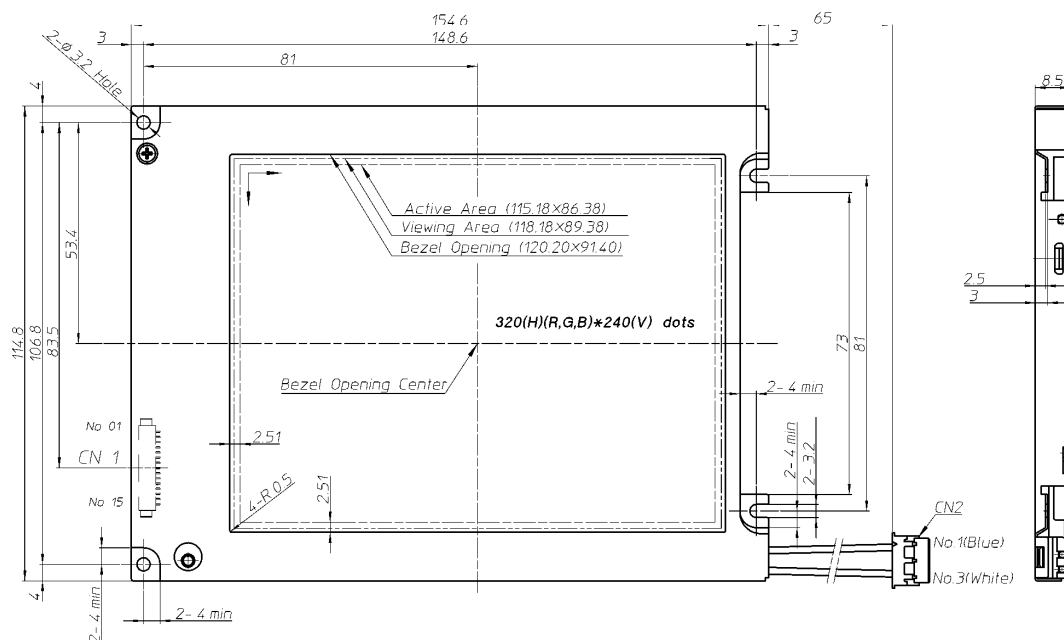

Features

- High Contrast Ratio 40:1
- High Brightness 200 (cd/m²)
- Long Life CFL 40,000 (h)
- Field Replaceable CFL
- Wide Temperature 0~60°C

Applications

- Display for Industrial Machine
- Measuring Instrument, Chart Recorder, Scale
- POS, ATM, Bank Terminal
- Fish Finder, GPS
- Sewing Machine, Musical Instrument

Specification

ITEM	SPECIFICATION	UNIT
Dot Format	(320×RGB) × 240	dot
Dot Pitch	0.12 × 0.36	mm
Outline Dimensions	154.6 × 114.8 × 8.5	mm
Mass	200	g
Contrast Ratio	40:1	—
Brightness	200 (IL=5.0mA)	cd/m ²
Response Time	330	ms
Viewing Angle(V/H)	60/100	deg.
Power Consumption	210 (LCD)	mW
	1.60 (Backlight)	W
Backlight	CFL (Single Tube)	—
Duty	1/240	—

ATTENTION : Specification subject to change without notice.
 Please check the latest version of the product specification.

KYOCERA CORPORATION
 LCD Division