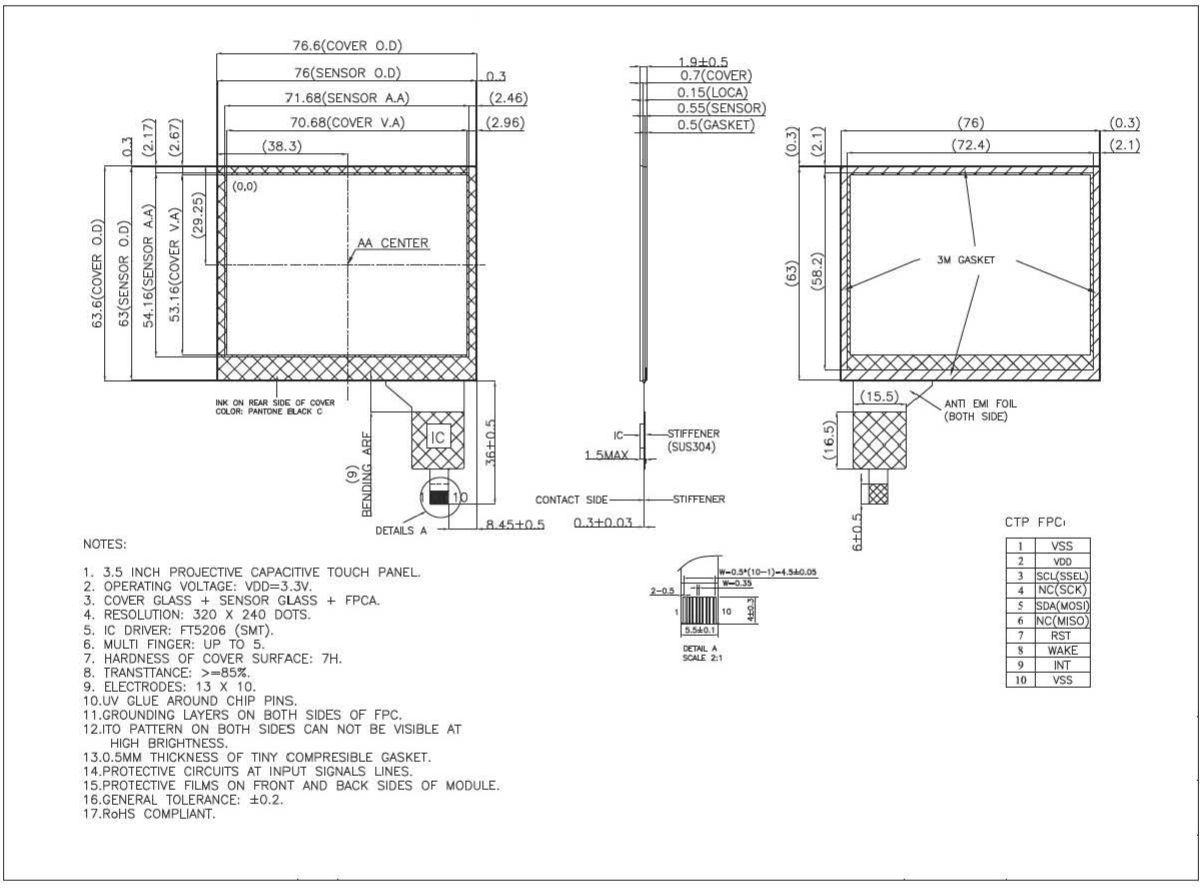

NOTES:

1. 3.5 INCH PROJECTIVE CAPACITIVE TOUCH PANEL.
2. OPERATING VOLTAGE: VDD=3.3V.
3. COVER GLASS + SENSOR GLASS + FPCA.
4. RESOLUTION: 320 X 240 DOTS.
5. IC DRIVER: FT5206 (SMT).
6. MULTI FINGER: UP TO 5.
7. HARDNESS OF COVER SURFACE: 7H.
8. TRANSTTANCE: >=85%.
9. ELECTRODES: 13 X 10.
10. UV GLUE AROUND CHIP PINS.
11. GROUNDING LAYERS ON BOTH SIDES OF FPC.
12. ITO PATTERN ON BOTH SIDES CAN NOT BE VISIBLE AT HIGH BRIGHTNESS.
13. 0.5MM THICKNESS OF TINY COMPRESIBLE GASKET.
14. PROTECTIVE CIRCUITS AT INPUT SIGNALS LINES.
15. PROTECTIVE FILMS ON FRONT AND BACK SIDES OF MODULE.
16. GENERAL TOLERANCE: ±0.2.
17. RoHS COMPLIANT.

CTP FPC:

1	VSS
2	VDD
3	SCL(SSEL)
4	NC(SCK)
5	SDA(MOSI)
6	NC(MISO)
7	RST
8	WAKE
9	INT
10	VSS