


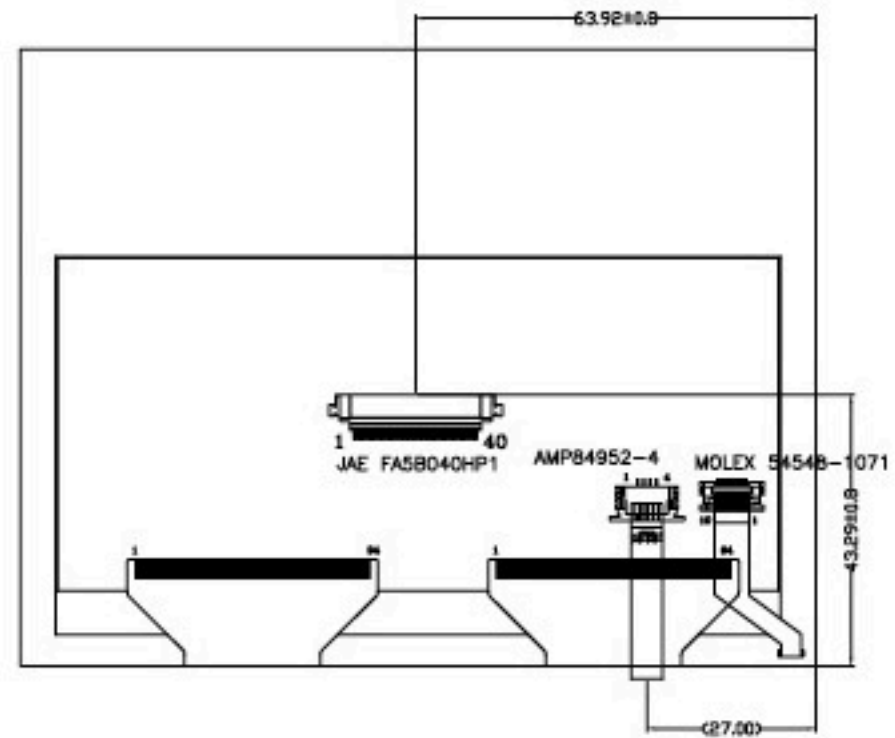
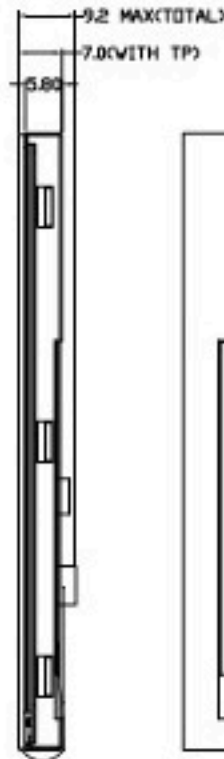


PIN DESCRIPTION

PIN NO	SYMBOL
1	U/D
2	NC
3	Hsync
4	VLED
5	VLED
6	VLED
7	VCC
8	Vsync
9	DE
10	X2
11	Y1
12	ADJ
13	B5
14	B4
15	B3
16	VSS
17	B2
18	B1
19	B0
20	VSS
21	G6
22	G4
23	G3
24	VSS
25	G2
26	G1
27	G0
28	VSS
29	R5
30	R4
31	R3
32	VSS
33	R2
34	R1
35	R0
36	X1
37	Y2
38	DCLK
39	VSS
40	I ₁ /R

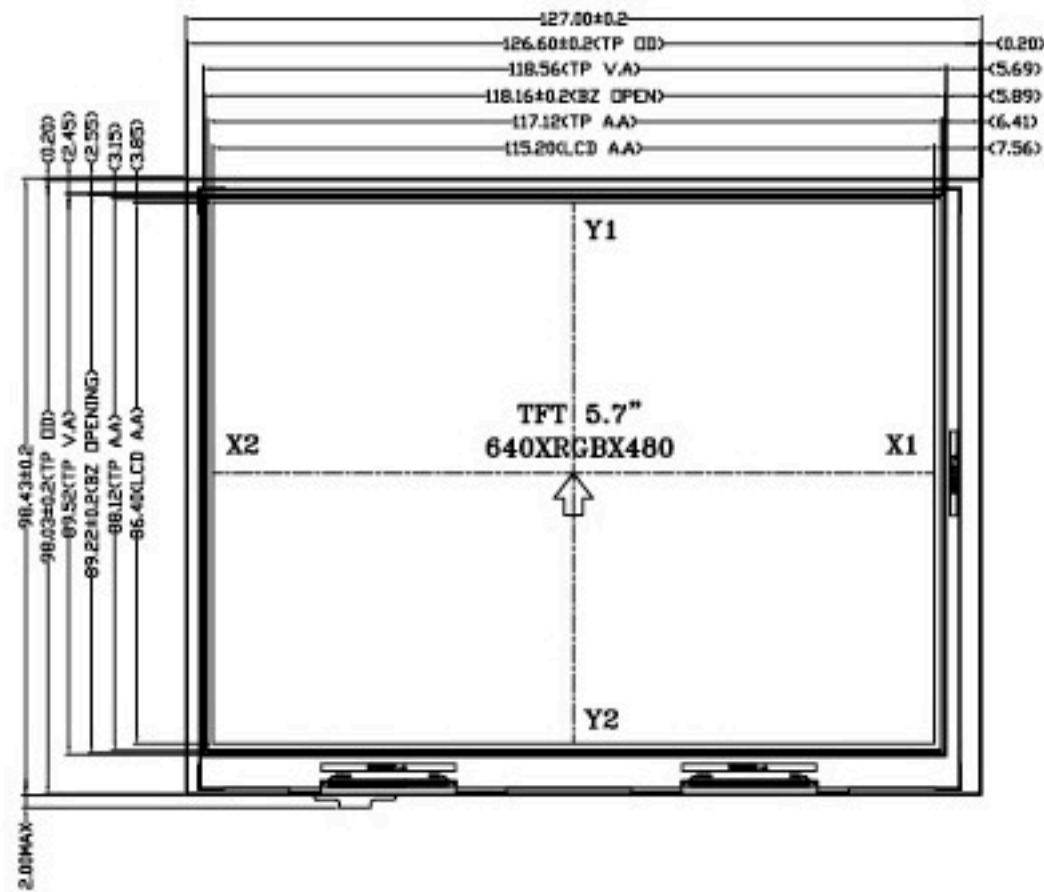

LED CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, POSITIVE.
2. OPERATING VOLTAGE: VDD=3.3V.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: HIMAX.
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. INTERFACE: 18-BIT RGB.
8. SURFACE LUMINANCE: 530cd/m² (TYP).
9. LED BACKLIGHT: 21-CHIP WHITE LED, If=140mA, Vf=9.6V.
10. RECOMMENDED CUSHION ADHERENT AREA: TP V.A+1.6mm.
11. GENERAL TOLERANCE: ±0.2.
12. RoHS COMPLIANT.