

## LJ32H028

EL Display Module

### Features

- 12 cm [4.7"] QVGA format
- High brightness (110 cd/m<sup>2</sup>)
- Wide viewing angle (Horizontal: 160°, Vertical: 160°)

### Specifications


Parameter		Unit
Display size	12 [4.7]	cm ["]
Dot format (H x V)	320 x 240	dot
Dot pitch (H x V)	0.30 x 0.30	mm
Active area (H x V)	95.9 x 71.9	mm
Luminance	110* <sup>1</sup>	cd/m <sup>2</sup>
Supply voltage	+5, +12	V
Power consumption	5	W

Parameter		Unit
Overall dimensions (W x H x D)	147.0 x 112.0 x 28.0	mm
Weight	260	g
Baseplate structure	Built - in	-
Detachable DC/DC converter	-	-
Operating temperature	-5 to +55	°C
Storage temperature	-40 to +80	°C
Survival temperature	-20 to +65	°C

\*1...About twice that of conventional models when the frame frequency is 120 Hz.

### Outline Dimensions

unit : mm

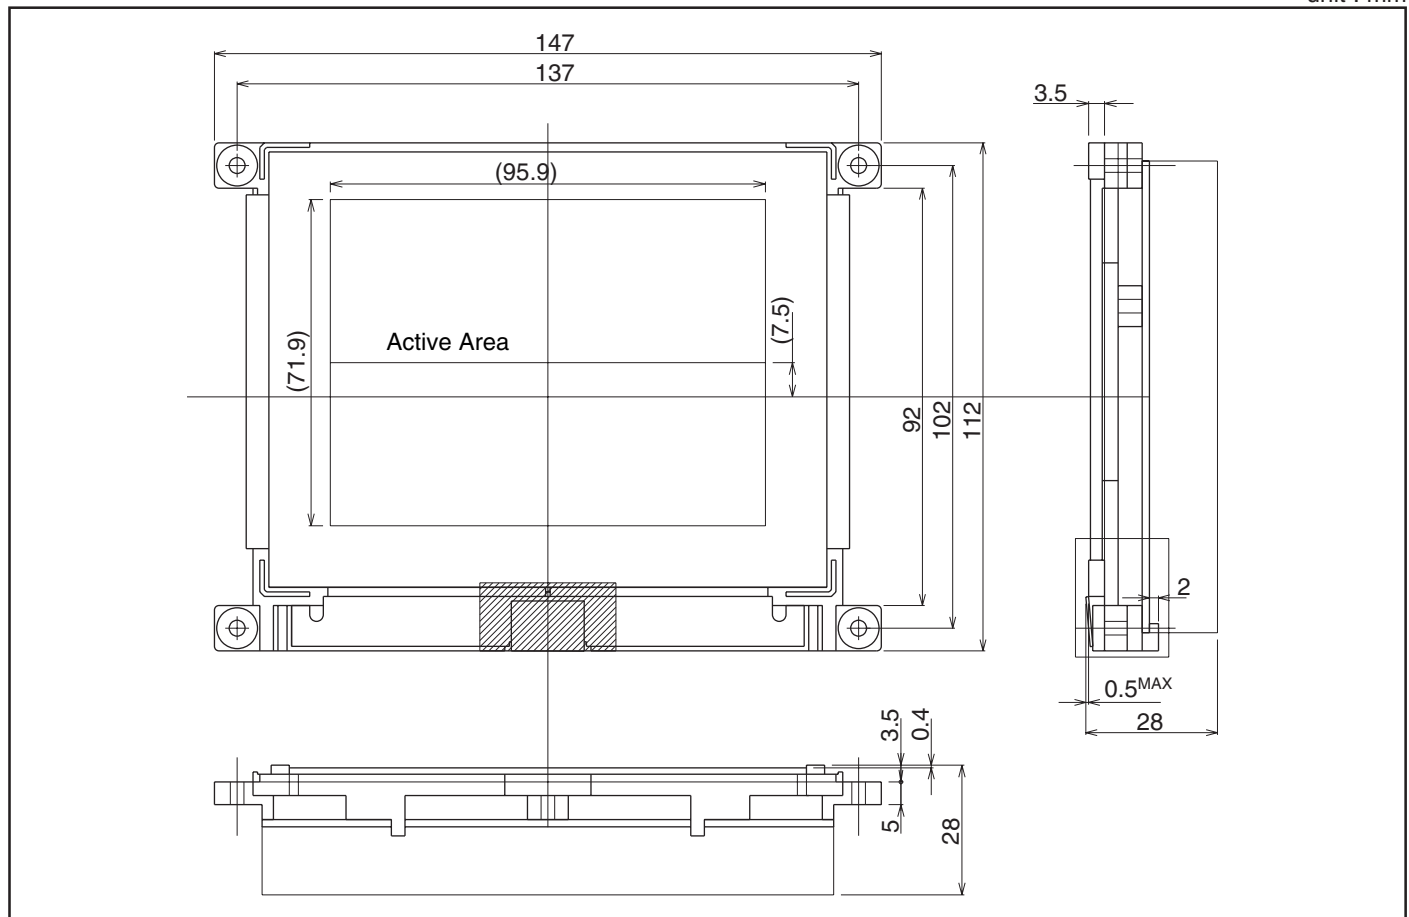

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. Specifications are subject to change without notice for improvement.