SHARP

LJ64H052

EL Display Module

Features

- 26 cm [10.4"] VGA format
- High luminance (200 cd/m^2)

Specifications

Parameter		Unit
Display size	26 [10.4]	cm ["]
Dot format (H x V)	640 x 480	dot
Dot pitch (H x V)	0.33 x 0.33	mm
Active area (H x V)	211.1 x 158.3	mm
Luminance	200	cd/m^2
Supply voltage	+5, +12	V
Power Consumption	12	W

Parameter		Unit
Outline dimensions (W x H x D)	267.0 x 220.0 x 22.0*1	mm
Weight	680*1	g
Baseplate structure	Yes	-
Detachable DC/DC converter	-	-
Operating temperature	-5 to +55	°C
Storage temperature	-40 to +80	°C
Survival temperature	-20 to +65	°C

*1...Including DC/DC converter

Outline Dimensions

unit : mm

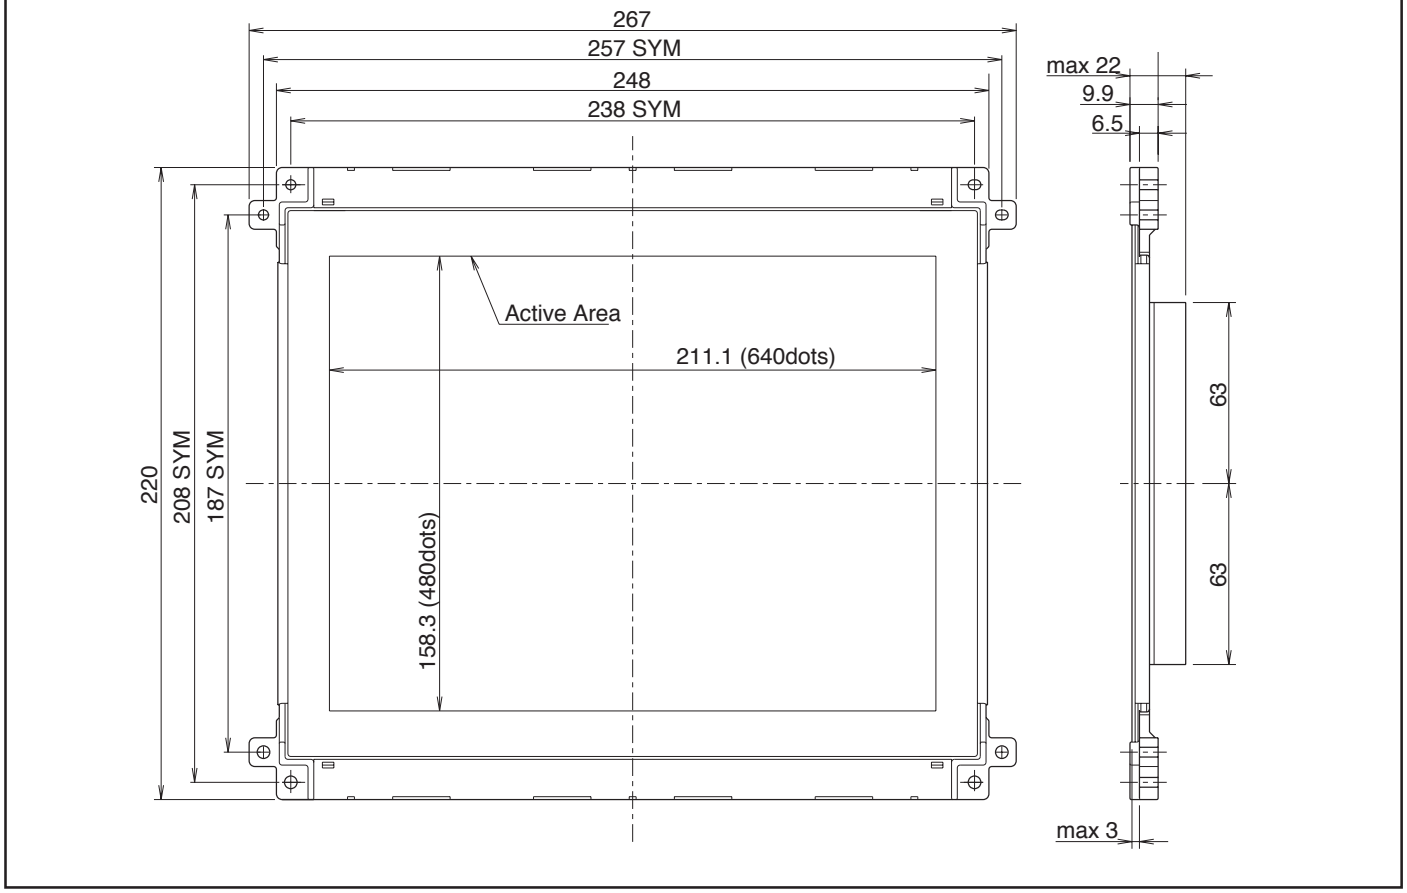

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

SHARP®

NORTH AMERICA

SHARP Microelectronics
of the Americas
5700 NW Pacific Rim Blvd.
Camas, WA 98607, U.S.A.
Phone: (360) 834-2500
Fax: (360) 834-8903
http://www.sharpsma.com

EUROPE

SHARP Microelectronics Europe
Sonninstraße 3
20097 Hamburg, Germany
Phone: (49) 40 2376-2286
Fax: (49) 40 2376-2232
http://www.sharpsme.com

ASIA

SHARP Corporation
Integrated Circuits Group
2613-1 Ichinomoto-Cho
Tenri-City, Nara, 632, Japan
Phone: +81-743-65-1321
Fax: +81-743-65-1532
http://www.sharp.co.jp