PRODUCT SPECIFICATIONS

SHARP

Mobile Liquid Crystal Displays Group

LQ030B7DD01

TFT-LCD Module

Spec. Issue Date: July 9, 2003

No: LCP-03033

PREPARED BY : DATE	S H A R P	SPEC No. LCP-03033
		FILE No.
APPROVED BY : DATE	MOBILE LIQUID CRYSTAL DISPLAY GROUP SHARP CORPORATION	ISSUE : 9 . Jul . 2003
		PAGE : 21 pages
	SPECIFICATION	Design Center MOBILE LCD Enterprise Development Center

DEVICE SPECIFICATION FOR

TFT-LCD module

MODEL No. LQ030B7DD01

☐ CUSTOMER'S APPROVAL

DATE

BY

PRESENTED

BY 中辻晴雄

H. NAKATSUJI

DEPARTMENT GENERAL MANAGER
Development Department VI
Design Center
MOBILE LCD Enterprise development Center
MOBILE LCD GROUP
SHARP CORPORATION

RECORDS OF REVISION

MODEL No：LQ030B7DD01

SPEC No ：LCP－03033

	NO.	PAGE	SUMMARY	NOTE
2003.07.09	LCP－03033	-	-	1 st Issue

NOTICE

This publication is the proprietary of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.

The application circuit examples in this publication are provided to explain the representative applications of SHARP's devices and are not intended to guarantee any circuit design or permit any industrial property right or other rights to be executed. SHARP takes no responsibility for any problems related to any industrial property right or a third party resulting from the use of SHARP's devices, except for those resulting directly from device manufacturing processes.

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that occur in equipment using any of SHARP's devices, shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP's device.

SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact SHARP in order to obtain the latest specification sheets before using any SHARP's device. Manufacturing locations are also subject to change without notice.

Observe the following points when using any device in this publication. SHARP takes no responsibility for damage caused by improper use of the devices.

The devices in this publication are designed for use in general electronic equipment designs, such as:

- Personal computers
- Office automation
- Telecommunication equipment
- Test and measurement equipment
- Industrial control
- Audio visual and multimedia equipment
- Consumer electronics

The appropriate design measures should be taken to ensure reliability and safety when SHARP's devices are used for equipment such as:

- Transportation control and safety equipment(i.e., aircraft, trains, automobiles, etc.)
- Traffic signals
- Gas leakage sensor breakers
- Alarm equipment
- Various safety devices etc.

SHARP's devices shall not be used for equipment that requires extremely high level of reliability, such as:

- Military and space applications
- Nuclear power control equipment
- Medical equipment for life support

Contact a SHARP representative, in advance, when intending to use SHARP's devices for any "specific" applications other than those recommended by SHARP.

Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

(1) Application

This specification applies to color TFT-LCD module, LQ030B7DD01.

(2) Overview

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor), named AD-TFT(Advanced TFT). It is practicable in both transmissive-type and reflection-type modes. It is composed of a color TFT-LCD panel, driver ICs, an FPC, a front sealed casing and a back-light and a back sealed casing. It isn't composed control circuit.

Graphics and texts can be displayed on a 320×3×320 dots panel with 262,144 colors by supplying. Optimum view angle is 1 o'clock.

(3) Mechanical specifications

Table 1

Parameter	Specifications	Units	Remarks
Screen size	7.60 [2.99"] Diagonal	cm	
Display active area	53.76 (H) ×53.76 (V)	mm	
Pixel format	320(H)×320(V) (1 pixel = R+G+B dots)	pixels	
Pixel pitch	0.056 (H) ×0.168 (V)	mm	
Pixel configuration	R,G,B vertical stripe		
Display mode	Normally white		
Unit outline dimension	66.6(W)×68.5(H)×3.6(D)	mm	【Note3-1】
Mass	37	g	TYP.
Surface treatment	Clear Hard Coat		

【Note 3-1】

Excluding protrusion. For detailed measurements and tolerances, please refer to Fig. 1.

(4) Pixel configuration

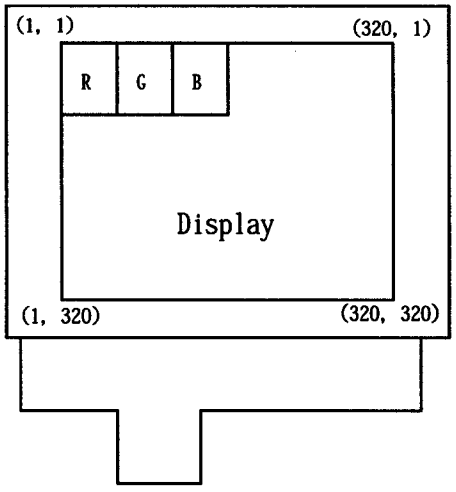

(5) Input / Output terminal

Table 2

Pin No.	Symbol	I/O	Description	Remarks
1	VDD	-	Power supply of gate driver (high level)	
2	NC	-		
3	MOD	I	Control signal of gate driver	【Note5-1】
4	SPS	I	Start signal of gate driver	
5	CLS	I	Clock signal of gate driver	
6	NC	-		
7	VEE	-	Power supply of gate driver (low level)	
8	VCOM	I	Common electrode driving signal	
9	SPL	I/O	Sampling start signal	
10	R0	I	RED data signal (LSB)	
11	R1	I	RED data signal	
12	R2	I	RED data signal	
13	R3	I	RED data signal	
14	R4	I	RED data signal	
15	R5	I	RED data signal (MSB)	
16	G0	I	GREEN data signal (LSB)	
17	G1	I	GREEN data signal	
18	G2	I	GREEN data signal	
19	G3	I	GREEN data signal	
20	G4	I	GREEN data signal	
21	G5	I	GREEN data signal (MSB)	
22	B0	I	BLUE data signal (LSB)	
23	B1	I	BLUE data signal	
24	B2	I	BLUE data signal	
25	B3	I	BLUE data signal	
26	B4	I	BLUE data signal	
27	B5	I	BLUE data signal (MSB)	
28	VSHD	-	Power supply of digital	
29	DGND	-	Ground (digital)	
30	PS	I	Power save signal	
31	LP	I	Data latch signal of source driver	
32	DCLK	I	Data sampling clock signal	
33	VSHA	-	Power supply (analog)	
34	V0	I	Standard voltage to generate gray scale voltage	
35	V1	I	Standard voltage to generate gray scale voltage	
36	V2	I	Standard voltage to generate gray scale voltage	
37	V3	I	Standard voltage to generate gray scale voltage	
38	V4	I	Standard voltage to generate gray scale voltage	
39	AGND	-	Ground (Analog)	

【Note5-1】 See section(7-1)-(A) "※Cautions when you turn on or off the power supply".

(6) Absolute Maximum Ratings

Table 3

Parameter		Symbol	Condition	Ratings	Unit	Remark
Power supply(S/Analog)		VSHA	Ta=25℃	-0.3～+6.0	V	
Power supply(S,G/Digital)		VSHD	Ta=25℃	-0.3～+6.0	V	
Power supply (G)		VDD	Ta=25℃	-0.3～+35.0	V	
Power supply (G)		VDD-VEE	Ta=25℃	-0.3～+35.0	V	
Input voltage (Analog)		VIA	Ta=25℃	-0.3～VSHA+0.3	V	[Terminal①]
Input voltage (Digital)		VID	Ta=25℃	-0.3～VSHD+0.3	V	[Terminal②]
Backlight LED	Forward current	IF	Ta=25℃	20	mA	【Note6-1】
	Power dissipation	PD	Ta=25℃	80	mW	【Note6-1】
	Reverse Voltage	VR	Ta=25℃	5	V	【Note6-1】
Operating temperature (panel surface)		T opp	—	-10～60	℃	【Note6-2】
Storage temperature		T stg	—	-20～70	℃	【Note6-2】

[Terminal①] V0,V1,V2,V3,V4

[Terminal②] MOD,SPS,CLS,SPL,R0～R5,G0～G5,B0～B5,PS,LP,DCLK

【Note6-1】 This is specified for each LED.

【Note6-2】 Humidity: 95%RH Max.(at Ta ≦ 40℃). Maximum wet-bulb temperature is less than 39℃ (at Ta > 40℃). Condensation of dew must be avoided.

(7) Electrical characteristics

7-1) Recommended operating conditions

A)TFT-LCD panel driving section

Table 4 GND=0V

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remarks
Supply voltage for source driver (Analog)		VSHA	+4.5	+5.0	+5.5	V	
Supply voltage for source driver (Digital)		VSHD	+2.7	+3.3	+3.6	V	
Standard input voltage		V0～V4	0	-	VSHA	V	【Note 7-1】
Supply voltage for gate driver	High voltage	VDD	+14.3	+15.0	+15.7	V	
	Low voltage	VEE	-10.5	-10.0	-9.5	V	
Input voltage for Source driver (Low)		VILS	GND	-	0.2VSHD	V	【Note 7-2】
Input voltage for Source driver (High)		VIHS	0.8VSHD	-	VSHD	V	【Note 7-2】
Input current for Source driver (Low)		IILS	-	-	10	μA	【Note 7-2】
Input current for Source driver (High)		IIHS1	-	-	10	μA	【Note 7-3】
		IIHS2	-	-	400	μA	【Note 7-4】
Input voltage for Gate driver (Low)		VILG	GND	-	0.2VSHD	V	【Note 7-5】
Input voltage for Gate driver (High)		VIHG	0.8VSHD	-	VSHD	V	【Note 7-5】
Input current for Gate driver (Low)		IILG	-	-	1.0	μA	【Note 7-5】
Input current for Gate driver (High)		IIHG	-	-	1.0	μA	【Note 7-5】
Common electrode driving signal	AC component	VCOMAC	-	±2.4	±2.5	Vp-p	【Note 7-6】
	DC component	VCOMDC	+0.1	+1.1	+2.1	V	【Note 7-6】

※Cautions when you turn on or off the power supply

① Turn on or off the power supply with simultaneously or the following sequence.

Turn on ··· VSHD → VSHA → VEE → VDD

Turn off ··· VDD → VEE → VSHA → VSHD

② The input signal of "MOD" Terminals (Pin No.3) must be low voltage when turning on the power supply, and it is held until more than double vertical periods after VSHD is turned on completely. After then, it must be held high voltage until turning off the power supply.

【Note 7-1】 These are standard input voltages for gray scale. When VCOM is alternated polarity, these voltage should be alternated polarity. V0 (black) is different polarity alternating signal of VCOM. V4 (white) is the same polarity alternating signal of VCOM. Center voltage of each standard input voltage shift positive way for LCD characteristics (V0→V1→V2→V3→V4). This sift amount is adjusted so as to no flicker of each standard input voltage after DC bias voltage of VCOM and V0 is adjusted.

【Note 7-2】 DCLK,SPL,LP,PS,R0～R5,G0～G5 and B0～B5 terminals are applied.

【Note 7-3】 DCLK,SPL,LP, R0～R5,G0～G5 and B0～B5 terminals are applied.

【Note 7-4】 PS terminal is applied.

【Note 7-5】 MOD,CLS and SPS terminals are applied.

【Note 7-6】 VCOMAC should be alternated on VCOMDC every 1 horizontal period and 1 vertical period. VCOMDC bias is adjusted so as to minimize flicker or maximum contrast every each module.

B)TFT-LCD panel driving section

Parameter	Symbol	MIN	TYP	MAX	Units	Remarks terminal
LED voltage	V_L	-	18.5	20	V	
LED current	I_L	-	18	20	mA	
Power consumption	W_L	-	333	400	mW	【Note 7-7】

【Note 7-5】 Calculated reference value($I_L \times V_L$).

7-2) Timing Characteristics of input signals

Table 5 AC Characteristics (1) (VSHA=+5.0V, VSHD=+3.3V, Ta=25℃)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
Source driver	Clock frequency	Fck	6.29	-	8.22	MHz	DCLK
	Rising time of clock	Tcr	-	-	20	ns	
	Falling time of clock	Tcf	-	-	20	ns	
	Pulse width (High level)	Tcwh	40	-	-	ns	
	Pulse width (Low level)	Tcwl	40	-	-	ns	
	Frequency of start pulse	Fsp	17.5	-	22.8	kHz	SPL 【Note 7-7】
	Setup time of start pulse	Tsusp	15	-	-	ns	
	Hold time of start pulse	Thsp	10	-	-	ns	
	Pulse width of start pulse	Twsp	-	-	1.5/FCK	ns	
	Setup time of latch pulse	Tsulp	20	-	-	ns	LP
	Hold time of latch pulse	Thlp	20	-	-	ns	
	Pulse width of latch pulse	Twlp	60	-	-	ns	
	Setup time of PS	Tsups	0	-	-	μs	PS
	Hold time of PS	Thps	0	-	-	μs	
Set up time of data		Tsud	15	-	-	ns	R0～R5,G0～G5 , B0～B5
Hold time of data		Thd	10	-	-	ns	
Gate driver	Clock frequency	Fcls	17.5	-	22.8	kHz	CLS
	Pulse width of clock(Low)	Twlcls	5	-	(1/fcls)-37	μs	
	Pulse width of clock(High)	Twhcls	37	-	-	μs	
	Rising time of clock	Trcls	-	-	100	ns	
	Falling time of clock	Tfcls	-	-	100	ns	
	Setup time of clock	Tsucls	3	-	-	μs	
	Hold time of clock	Thcls	0	-	-	μs	
	Frequency of start puls	Fsps	52	-	68	Hz	SPS
	Setup time of start pulse	Tsusps	100	-	-	ns	
	Hold time of start pulse	Thsps	300	-	-	ns	
	Rising time of start pulse	Trsps	-	-	100	ns	
	Falling time of start pulse	Tfsps	-	-	100	ns	
Vcom	Setup time of Vcom	Tsuvcom	3	-	-	μs	Vcom
	Hold time of Vcom	Thvcom	1	-	-	μs	

【Note 7-7】 There must be only one up-edge of DCLK (includes Tsusp and Thsp time) in the period of SPL="Hi".

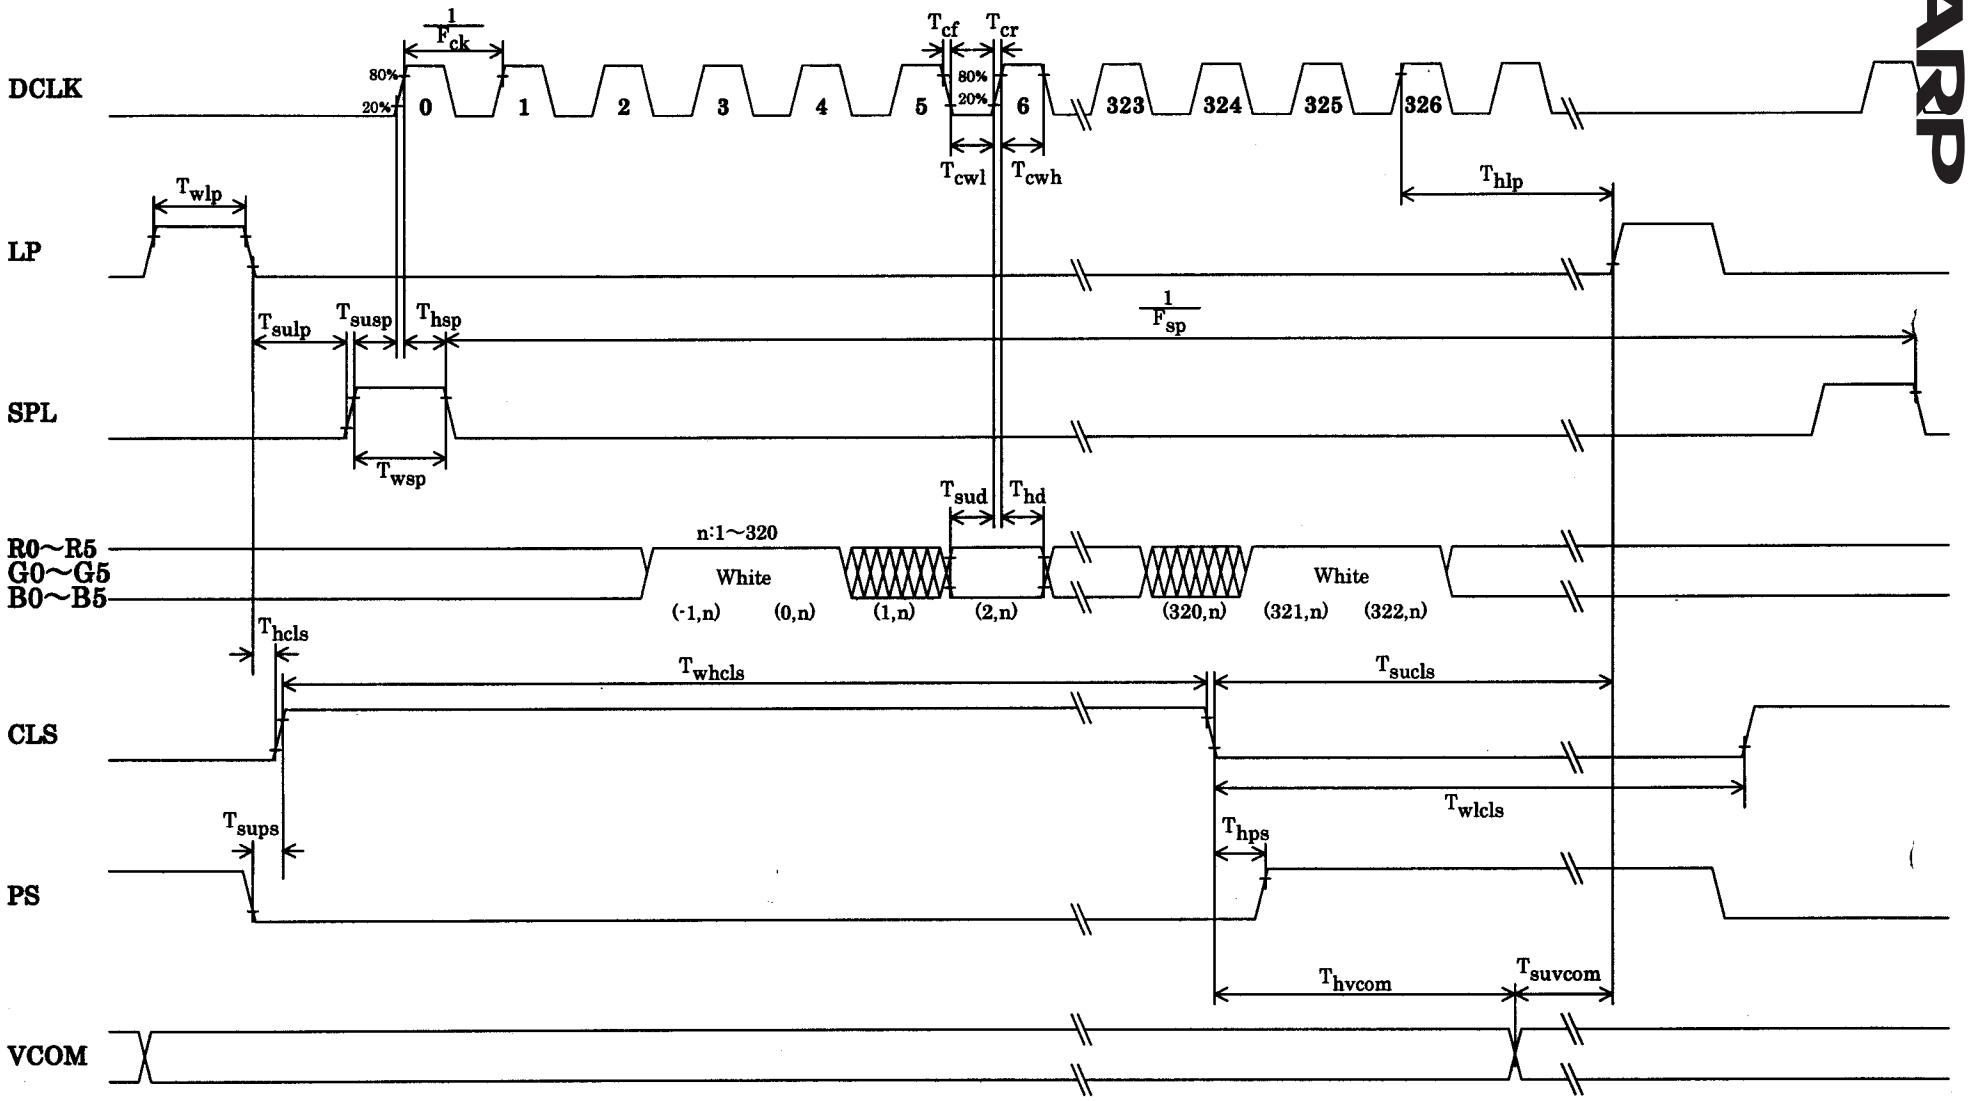

Fig.(a) Horizontal timing chart

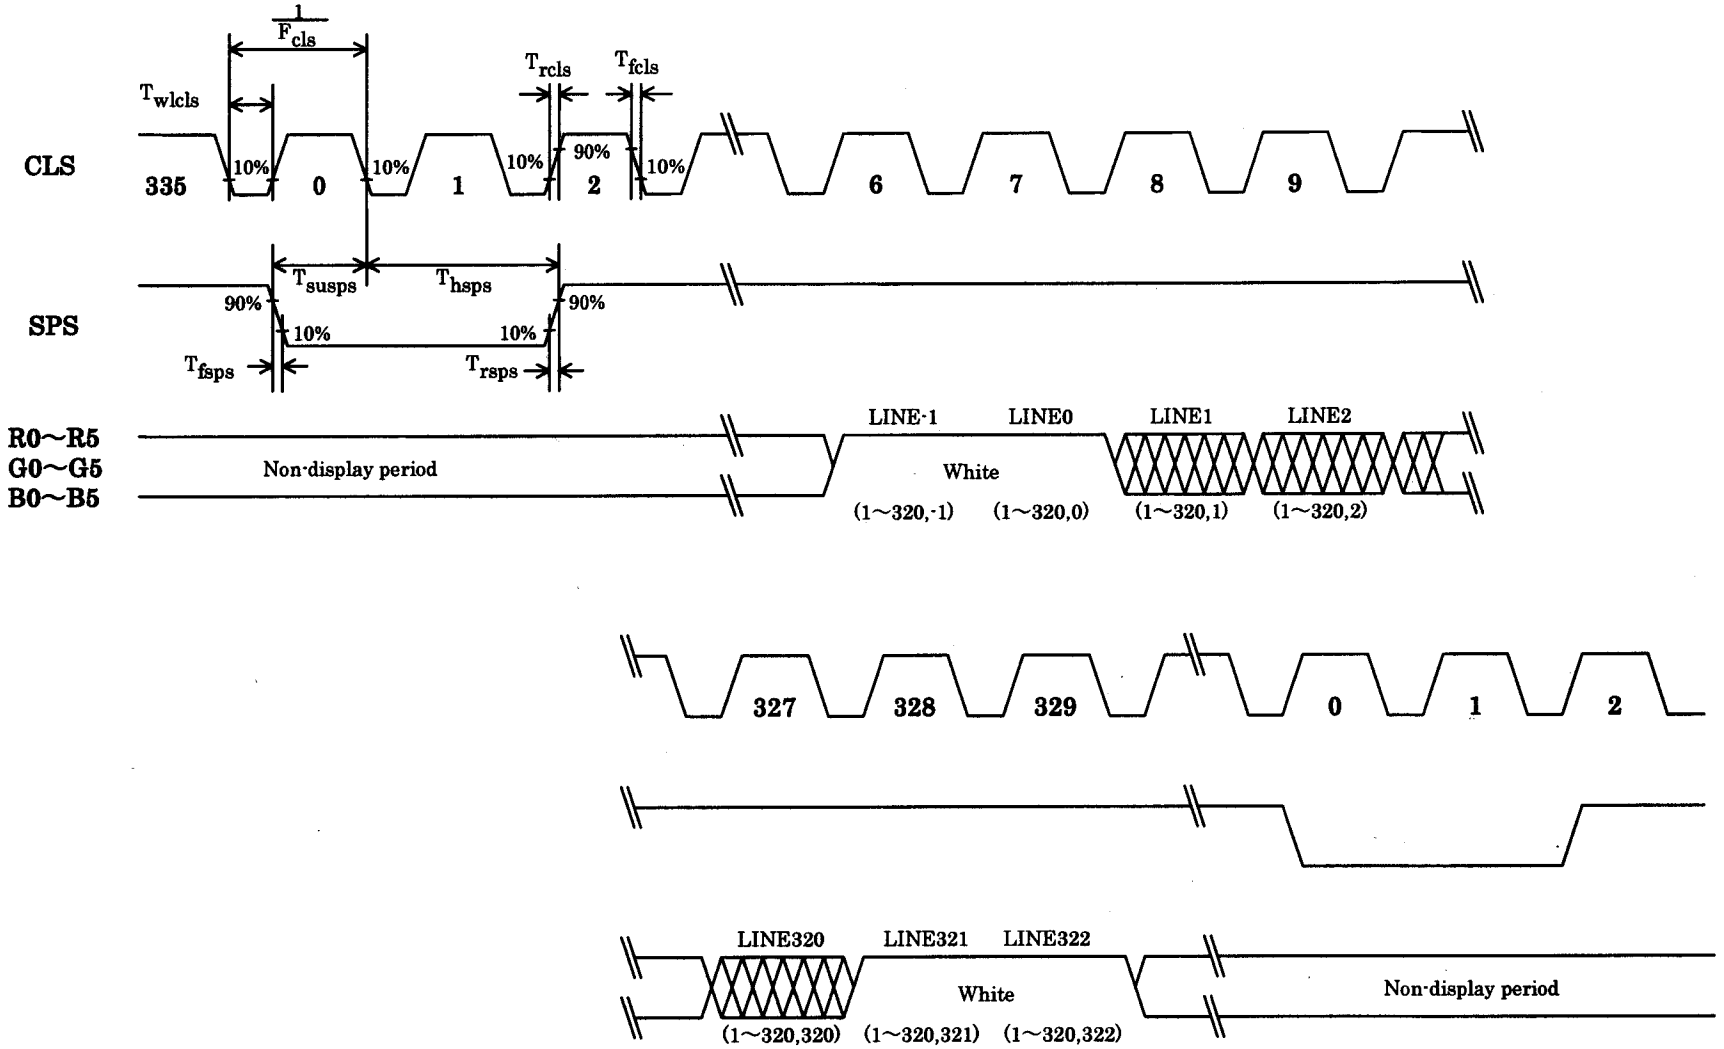

Fig.(b) Vertical timing chart

7-3) Power consumption

Measurement condition : SPS=60Hz, CLS=20.16kHz, SPL=20.16kHz, DCLK=7.26MHz
The term of PS="Lo" in one horizontal period ··· 30.1 μsec(322DCLK)
Ta=25℃

Table 6

Parameter		Symbol	Conditions	MIN	TYP	MAX	Unit	Remarks
Source current	Analog	ISHA	VSHA=+5.0V	-	4.0	7.5	mA	【Note 7-11】
	Digital	ISHD	VSHD=+3.3V	-	1.8	3.3	mA	【Note 7-11】
Gate current	High	IDD	VDD=+15.0V	-	50	100	μA	【Note 7-12】
	Low	IEE	VEE=-10.0V	-	-50	-100	μA	【Note 7-12】

【Note 7-11】 Vertical stripe pattern alternating 21 gray scale (GS21) with 42 gray scale (GS42) every 1 dot.

【Note 7-12】 64-Gray-bar vertical pattern (GS0 ～ GS63 for horizontal way)

(8) Input Signals, Basic Display Color and Gray Scale of Each Color

Table 7

	Colors & Gray scale	Data signal																	
		Gray Scale	R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic color	Black	—	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	—	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	—	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Cyan	—	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	—	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	—	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	—	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	—	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of red	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	⇧	GS1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	GS2	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	⇧	↓				↓						↓						↓		
	⇩	↓				↓						↓						↓		
	Brighter	GS61	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	⇩	GS62	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red	GS63	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of green	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	⇧	GS1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	GS2	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	⇧	↓				↓						↓						↓		
	⇩	↓				↓						↓						↓		
	Brighter	GS61	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	⇩	GS62	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
	Green	GS63	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray Scale of bleu	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	⇧	GS1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	GS2	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	⇧	↓				↓						↓						↓		
	⇩	↓				↓						↓						↓		
	Brighter	GS61	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	⇩	GS62	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Bleu	GS63	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

0 : Low level voltage 1 : High level voltage

Each basic color can be displayed in 64 gray scales from 6 bit data signals. According to the combination of total 18 bit data signals, the 262,144-color display can be achieved on the screen.

(9) Optical characteristics

9-1) Reflective mode

Table 8 Ta=25℃

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks
Viewing angle range		θ21	CR≧2	50	60	-	degree	【Note 9-1,2】
		θ22		30	40	-	degree	
		θ11		40	50	-	degree	
		θ12		30	40	-	degree	
Contrast ratio		CR	θ=0°	3	5	-	-	【Note 9-2】
Response time	Rise	τr		-	30	60	ms	【Note 9-3】
	Fall	τd		-	50	100	ms	
White chromaticity		x		0.285	0.335	0.385	-	【Note 9-4】
		y		0.320	0.370	0.420	-	
Reflection ratio		R		4	6	-	%	【Note 9-5】

※The measuring method of the optical characteristics is shown by the following figure.

※A measurement device is Otsuka luminance meter LCD5200. (With the diffusion reflection unit.)

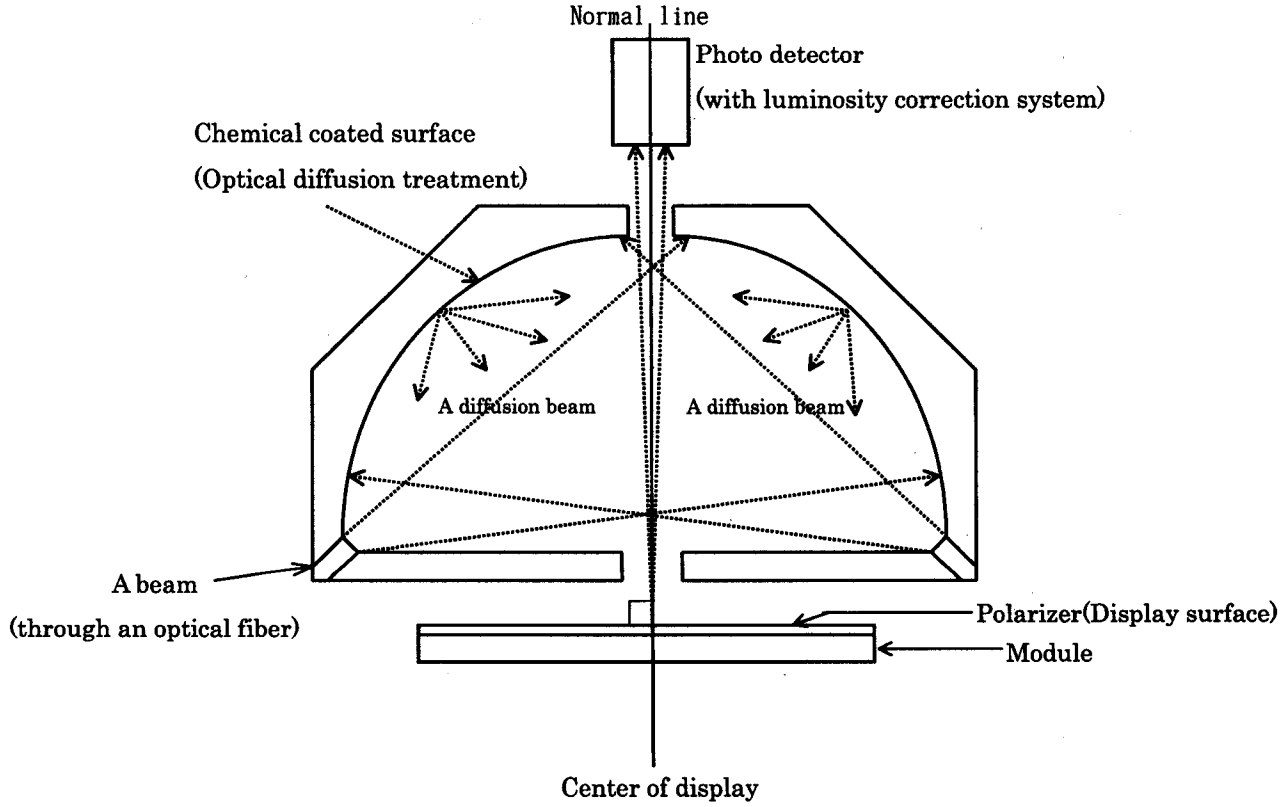

Measuring method (a) for optical characteristics

9-2) Transmisive mode

Table 9 Ta=25°C

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remarks
Viewing angle range		θ21	CR≥2	50	60	-	degree	【Note 9-1,2】
		θ22		30	40	-	degree	
		θ11		40	50	-	degree	
		θ12		30	40	-	degree	
Contrast ratio		CR	θ = 0°	40	70	-	-	【Note 9-2】
Response time	Rise	τr		-	30	60	ms	【Note 9-3】
	Fall	τd		-	50	100	ms	
White chromaticity		x		0.260	0.310	0.360	-	
		y		0.290	0.340	0.390	-	
Brightness		L		90	110	-	cd/m²	I_{LED}=18mA

* The measuring method of the optical characteristics is shown by the following figure.

* A measurement device is TOPCON luminance meter BM-5(A).(Viewing cone 1)

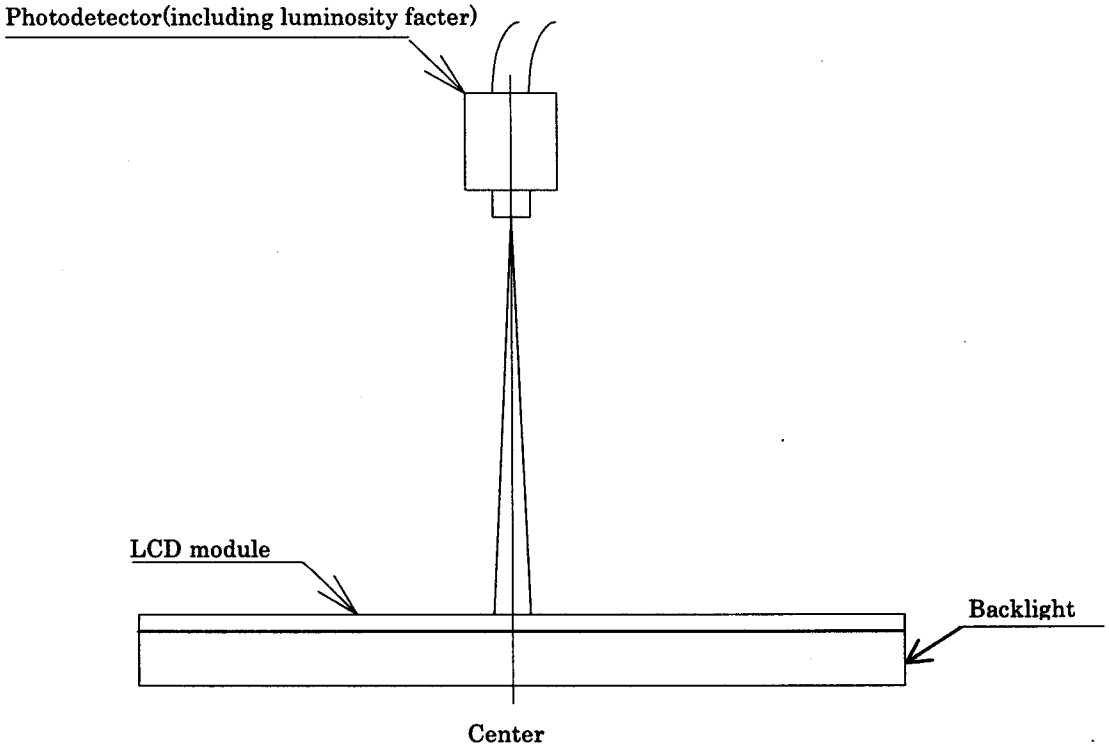

Measuring method (b) for optical characteristics

【Note 9-1】 Viewing angle range is defined as follows.

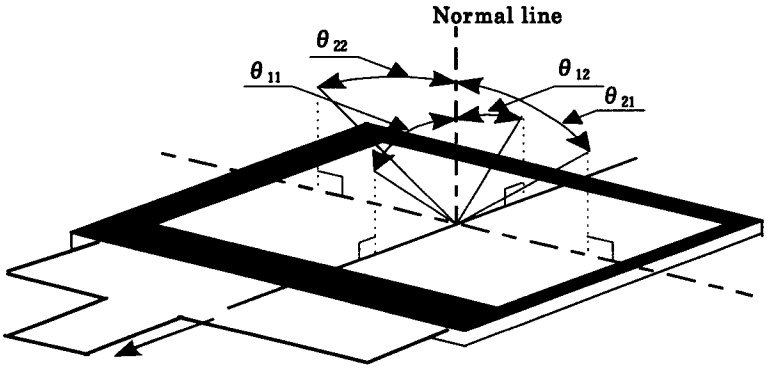

6 o'clock direction

Definition for viewing angle

【Note 9-2】 Definition of contrast ratio:

The contrast ratio is defined as follows:

$$\text{Contrast ratio(CR)} = \frac{\text{Photo detector output with all pixels white(GS63)}}{\text{Photo detector output with all pixels black(GS0)}}$$

V_{COMAC}=4.8Vp-p,V0=4.0Vp-p,V4=-4.0Vp-p

【Note 9-3】 Definition of response time:

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

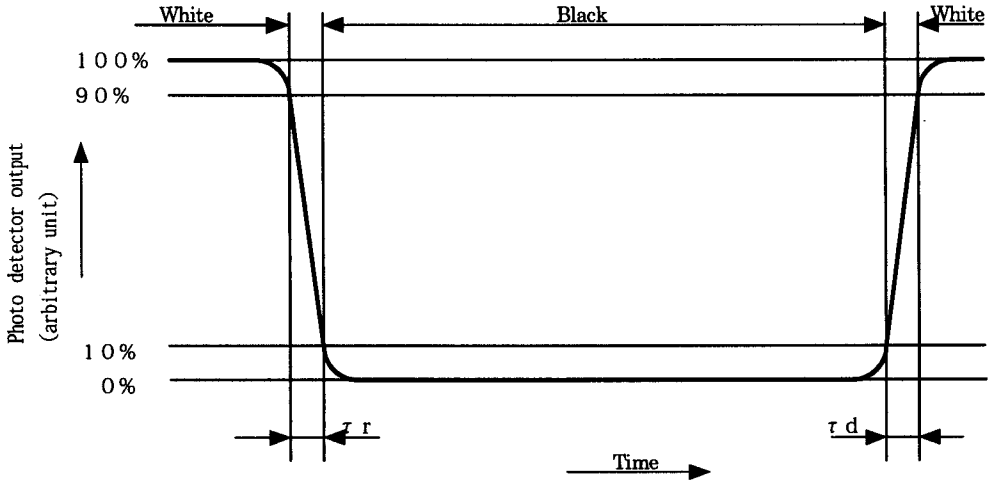

【Note 9-4】 A measurement device is Minolta CM-2002.

【Note 9-5】 Definition of reflection ratio

$$\text{Reflection ratio} = \frac{\text{Light detected level of the reflection by the LCD module}}{\text{Light detected level of the reflection by the standard white board}}$$

(10)Display quality

The display quality of the color TFT-LCD module shall be in compliance with the Incoming Inspection Standards for TFT-LCD.

(11) Mechanical characteristics

11-1) External appearance

See Fig. 1

11-2) FPC characteristics

①Specific connector

LCD FPC : FF0239SS1(JAE)

LED FPC : 59453-041120F(FCI) (Bottom contact)

LED FPC : 59453-042120F(FCI) (Top contact)

② Bending endurance of the bending slits portion(See Fig.1) :

Ⅰ.Bending slit ①

No line of the FPC is broken for the bending test (Bending radius=0.6mm and angle=90°) in 30 cycles.

Ⅱ.Bending slit ②

No line of the FPC is broken for the bending test by human hand (Bending radius=0mm and angle=180°) in 2 cycles.

(12) Handling Precautions

12-1) Insertion and taking out of FPC

Be sure insert and take out of the FPC into the connector of the set after turning off the power supply on the set side.

12-2) Handling of FPC

FPC shall be bent only slit portion. The bending slit ①shall be bent uniformly on the whole slit portion with bending radius larger than 0.6mm ,and only inner side (back side of the module).

Don't bend it outer side (display surface side).

Don't give the FPC too much force, for example, hanging the module with holding FPC.

12-3) Installation of the module

① On mounting the module, be sure to fix the module on the same plane. Take care not to warp or twist the module.

② In case that no protective plate is attached on the panel surface, pay attention to the following points. In order to avoid the electrostatic discharge, design the cabinet with grounded conductive sheet inside and cover the module include edge of the polarizer with it

12-4) Precaution when mounting

① The polarizer can be easily scratched. Handle it with sufficient care.

② If water droplets and oil attaches to it for a long time, discoloration and staining occurs. Wipe them off immediately.

③ Glass is used for the TFT-LCD panel. If it is dropped or bumped against a hard object, it may be broken. Handle it with sufficient care.

④ As the CMOS IC is used in this module, pay attention to static electricity when handling it. Take a measure for grounding on the human body.

12-5) Others

① The liquid-crystal is deteriorated by ultraviolet rays. Do not leave it in direct sunlight and strong ultraviolet rays for many hours.

② If it is kept at a temperature below the rated storage temperature, it becomes coagulated and the panel may be broken. Also, if it is kept at a temperature above the rated storage temperature, it becomes isotropic liquid and does not return to its original state. Therefore, it is desirable to keep it at room temperature as much as possible.

③ If the LCD breaks, don't put internal liquid crystal into the mouth. When the liquid crystal sticks to the hands, feet and clothes, wash it out immediately.

④ Wipe off water drop or finger grease immediately. Long contact with water may cause discoloration or spots.

⑤ Observe general precautions for all electronic components.

⑥ VCOM must be adjusted on condition of your final product. No adjustment causes the deterioration for display quality.

⑦ Static image should not be displayed more than 5 minutes in order to prevent from occurrence of residual image.

(13) Forwarding form

a) Piling number of cartons: MAX. 16

b) Package quantity in one cartons: 50pcs.

c) Carton size: 623mm(W) × 381mm(D) × 101mm(H)

d) Total mass of 1 carton filled with full modules: 3200g

Fig.2 shows packing form.

Environment

(1)Temperature	: 0~40℃
(2)Humidity	: 60%RH or less (at 40℃) No dew condensation at low temperature and high humidity.
(3)Atmosphere	: Harmful gas, such as acid or alkali which bites electronic components and/or wires, must not be detected.
(4)Period	: about 3 months
(5)Opening of the package	: In order to prevent the LCD module from breakdown by electrostatic charges, please control the room humidity over 50%RH and open the package taking sufficient countermeasures against electrostatic charges, such as earth, etc.

(14)Reliability Test Conditions for TFT-LCD Module

Table 10

No.	Test items	Test conditions
1	High temperature storage test	Ta=+70℃ 240h
2	Low temperature storage test	Ta=-30℃ 240h
3	High temperature and high humidity operating test	Tp=+40℃ , 95%RH 240h (But no condensation of dew)
4	High temperature operating test	Tp=+60℃ 240h
5	Low temperature operating test	Tp=-10℃ 240h
6	Electro static discharge test	±200V・200pF(0Ω) 1 time for each terminals
7	Shock test	980 m/s^2, 6 ms ±X, ±Y, ±Z 3 times for each direction (JIS C0041, A-7 Condition C)
8	Vibration test	Frequency range: 10Hz~55Hz Stroke: 1.5 mm Sweep: 10Hz~55Hz X,Y,Z 2 hours for each direction (total 6 hours) (JIS C0040, A-10 Condition A)
9	Heat shock test	Ta=-30℃~+75℃ / 5 cycles (1h) (1h)

【Note】 Ta = Ambient temperature, Tp = Panel temperature

【Check items】 In the standard condition, there shall be no practical problems that may affect the display function.

(15) Others

15-1) Indication of lot number

The lot number is shown on a label. Attached location is shown in Fig.1 (Outline Dimensions).

Indicated contents of the label

LQ030B7DD01	○○○○○○○○
model No.	lot No.

15-2) Used Regulation of Chemical Substances Breaking Ozone Stratum

Substances with the object of regulation : CFCS, Carbon tetrachloride, Halon
1,1,1-Trichloro ethane (Methyl chloroform)

(a) This LCD module, Constructed part and Parts don't contain the above substances.

(b) This LCD module, Constructed part and Parts don't contain the above substances in processes of manufacture.

15-3) If some problems arise about mentioned items in this document and other items, the user of the TFT-LCD module and Sharp will cooperate and make efforts to solve the problems with mutual respect and good will.

SHARP

Fig.1 Outline dimensions

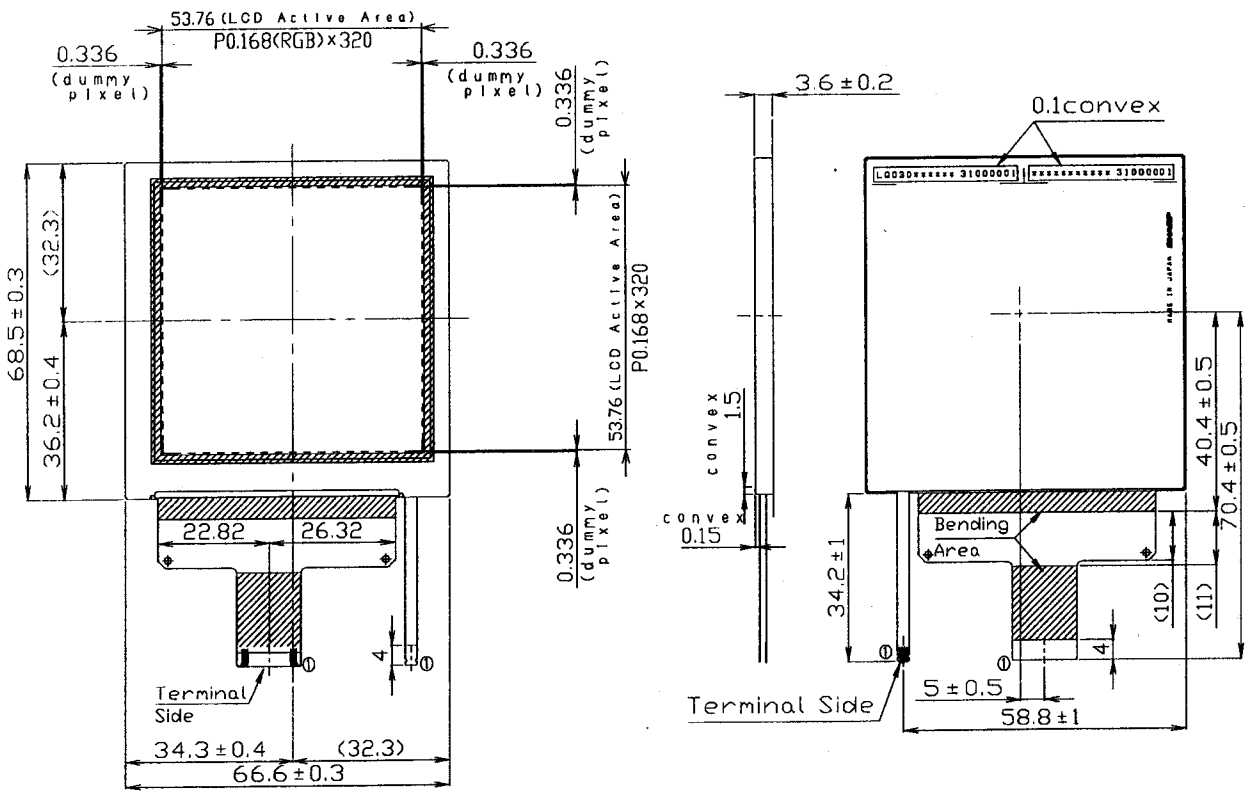

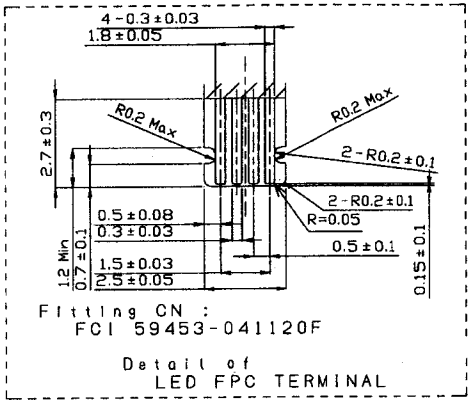

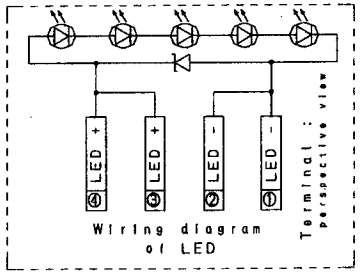

LCD FPC
Fitting CN :
JAE FF0239SS1

LED FPC
Fitting CN :
FCI 59453-041120F (Bottom Contact)
FCI 59453-042120F (Top Contact)

General tolerance is ±0.5
Guarantee of appearance = LCD Active Area.
LCD-FPC should bended only bending area.
LCD/LED-FPC bend larger than 0.6 in radius.
Take care in set design to hide
the scratches and bubbles appeared on
the polarizer or other frame area
which is located outside of LCD Active Area.
The tolerance of module width are
exclude warp of case.

ORIGINAL MODEL	LQ030B7DD01 (3.0")		
画面サイズ ACTIVE AREA SIZE	76.0281 (2.99")		
	0.168mm 320 (RGB) ×320		
尺度 SCALE 1/1	B付 DATE	20/Jun/2003	
単位 Unit mm	名称 NAME	3.0" ADV Module Outline dimension	
	ユーザー USER		
原紙サイズ A3	図番 DRAWING NO	LDM-03014	

改訂 REVISION	担当
5	
4	
3	
2	
1	

設計 DESIGNED K. Yoshioka | 製図 DRAFTED | 検図 DSN CK | 検図 DSN CK | 承認 ENG APPD

SHARP CORPORATION
[MB液晶設計C] 第6開発部

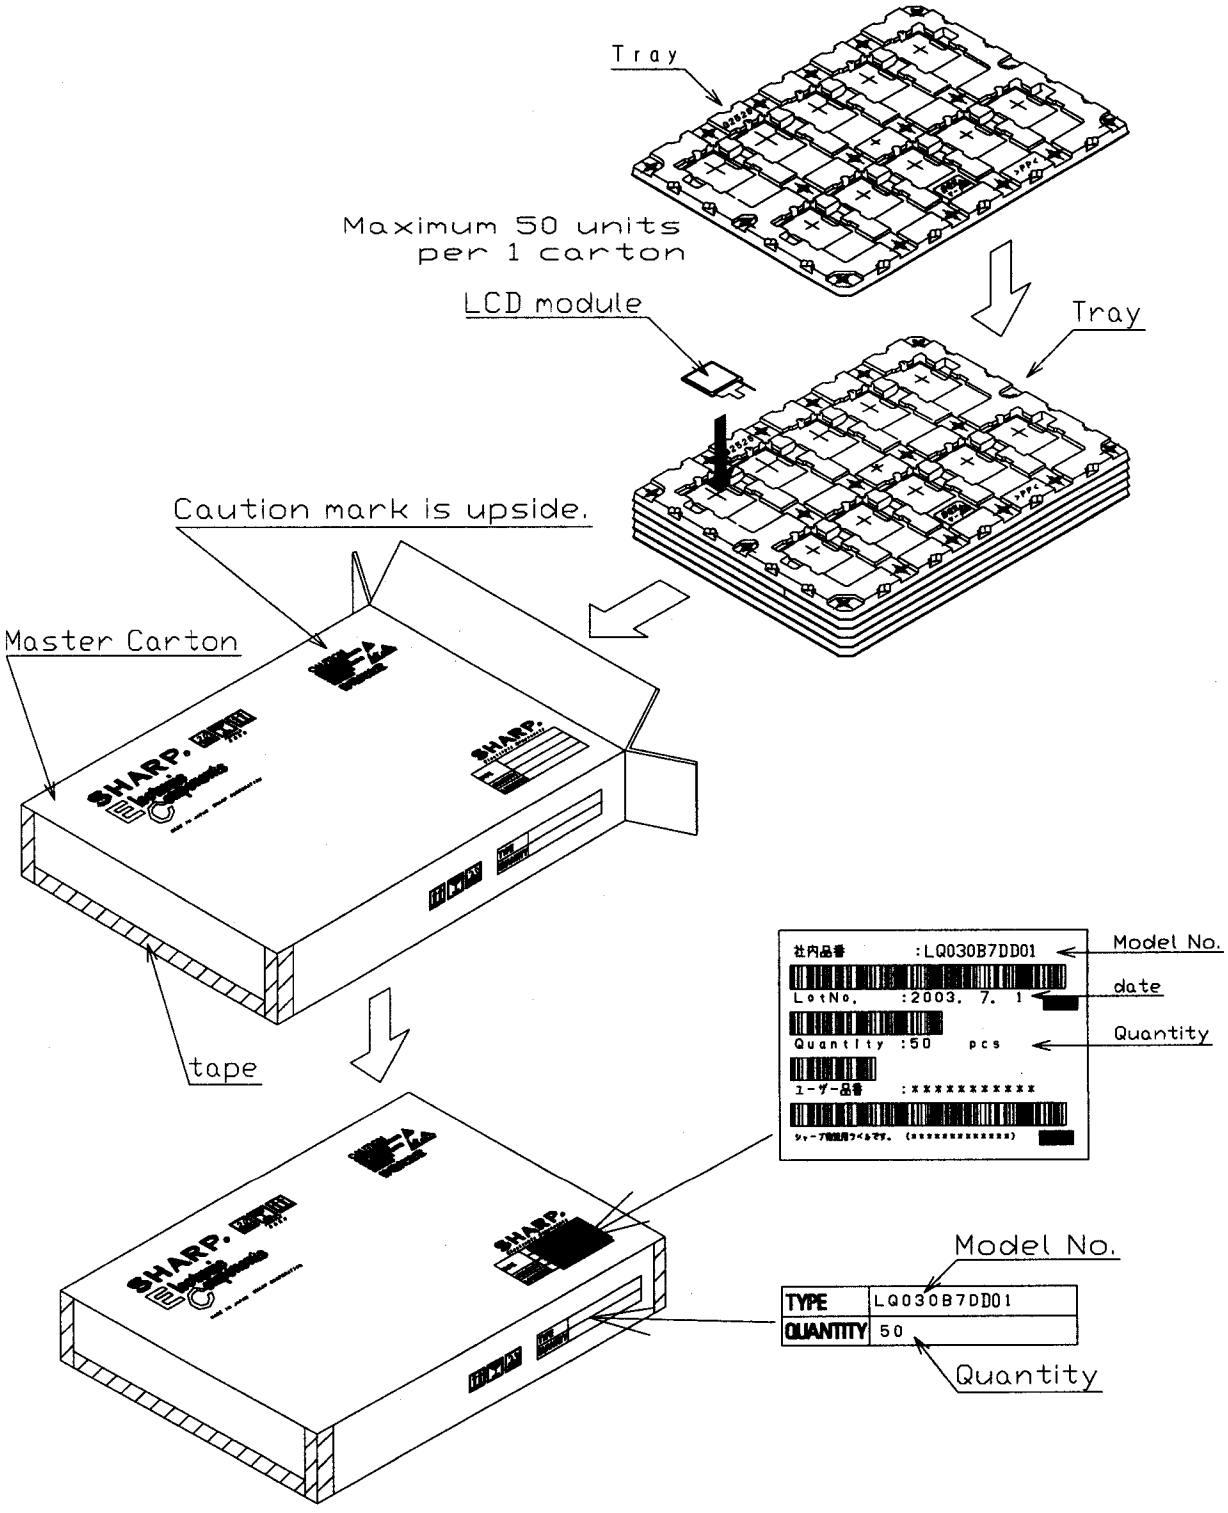
Tray
Maximum 50 units
per 1 carton
LCD module
Tray
Caution mark is upside.
Master Carton
tape
社内品番 :LQ030B7DD01
Model No.
LotNo. :2003. 7. 1
date
Quantity :50 pcs
Quantity
ユーザー品番 :xxxxxxxxxxx
Model No.
TYPE LQ030B7DD01
QUANTITY 50
Quantity

Fig.2

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

SHARP®

NORTH AMERICA

SHARP Microelectronics of the Americas
5700 NW Pacific Rim Blvd.
Camas, WA 98607, U.S.A.
Phone: (1) 360-834-2500
Fax: (1) 360-834-8903
Fast Info: (1) 800-833-9437
www.sharpsma.com

EUROPE

SHARP Microelectronics Europe
Division of Sharp Electronics (Europe) GmbH
Sonninstrasse 3
20097 Hamburg, Germany
Phone: (49) 40-2376-2286
Fax: (49) 40-2376-2232
www.sharpsme.com

JAPAN

SHARP Corporation
Electronic Components & Devices
22-22 Nagaike-cho, Abeno-Ku
Osaka 545-8522, Japan
Phone: (81) 6-6621-1221
Fax: (81) 6117-725300/6117-725301
www.sharp-world.com

TAIWAN

SHARP Electronic Components
(Taiwan) Corporation
8F-A, No. 16, Sec. 4, Nanking E. Rd.
Taipei, Taiwan, Republic of China
Phone: (886) 2-2577-7341
Fax: (886) 2-2577-7326/2-2577-7328

SINGAPORE

SHARP Electronics (Singapore) PTE., Ltd.
438A, Alexandra Road, #05-01/02
Alexandra Technopark,
Singapore 119967
Phone: (65) 271-3566
Fax: (65) 271-3855

KOREA

SHARP Electronic Components
(Korea) Corporation
RM 501 Geosung B/D, 541
Dohwa-dong, Mapo-ku
Seoul 121-701, Korea
Phone: (82) 2-711-5813 ~ 8
Fax: (82) 2-711-5819

CHINA

SHARP Microelectronics of China
(Shanghai) Co., Ltd.
28 Xin Jin Qiao Road King Tower 16F
Pudong Shanghai, 201206 P.R. China
Phone: (86) 21-5854-7710/21-5834-6056
Fax: (86) 21-5854-4340/21-5834-6057
Head Office:
No. 360, Bashen Road,
Xin Development Bldg. 22
Waigaoqiao Free Trade Zone Shanghai
200131 P.R. China
Email: smc@china.global.sharp.co.jp

HONG KONG

SHARP-ROXY (Hong Kong) Ltd.
3rd Business Division,
17/F, Admiralty Centre, Tower 1
18 Harcourt Road, Hong Kong
Phone: (852) 28229311
Fax: (852) 28660779
www.sharp.com.hk
Shenzhen Representative Office:
Room 13B1, Tower C,
Electronics Science & Technology Building
Shen Nan Zhong Road
Shenzhen, P.R. China
Phone: (86) 755-3273731
Fax: (86) 755-3273735