

# LCD Specification

LCD Group

## LQ231U1LW31 LCD Module

### Product Specification

September 2009

Normally Black UXGA module featuring 500 nits brightness with 600:1 contrast; LED backlight, symmetrical wide viewing cone, 8 ms response time, anti-glare and 2H hard coating.

**SHARP**<sup>®</sup>

PREPARED BY : DATE	<b>SHARP</b>  MOBILE LIQUID CRYSTAL DISPLAY GROUP SHARP CORPORATION SPECIFICATION	SPEC No. LD-21810
APPROVED BY : DATE		FILE No.
		ISSUE : Sep. 01. 2009 PAGE : 22 pages APPLICABLE GROUP MOBILE LIQUID CRYSTAL DISPLAY GROUP

DEVICE SPECIFICATION FOR  
**TFT-LCD Module**  
 MODEL No.  
**LQ231U1LW31**

**These parts have corresponded with the RoHS directive.**

CUSTOMER'S APPROVAL

DATE \_\_\_\_\_

BY \_\_\_\_\_

PRESENTED  
 BY   
 T. Naka  
 DIVISION DEPUTY GENERAL MANAGER  
 AND DEPARTMENT GENERAL MANAGER  
 ENGINEERING DEPT. I  
 MOBILE LIQUID CRYSTAL DISPLAY DIVISION III  
 MOBILE LIQUID CRYSTAL DISPLAY GROUP  
 SHARP CORPORATION



## 1. Application

This specification sheets applies to the color TFT-LCD module LQ231U1LW31.

These specification sheets are the proprietary product of SHARP CORPORATION ("SHARP) and include materials protected under copyright of SHARP. Do not reproduce or cause any third party to reproduce them in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP.

The application example published in this specification sheets is used to explain a typical application example that uses the product of our company. It is not the one to permit the guarantee or the execution right to the execution of an industrial property and other right according to this technological material. Moreover, SHARP assumes no responsibility for any problem related to the third party and the industrial property, etc. occurring by having used the product of our company.

The device listed in these specification sheets was designed and manufactured for use in general electronic equipment.

In case of using the device for applications such as control and safety equipment for transportation (controls of aircraft, trains, automobiles, etc.), rescue and security equipment and various safety related equipment which require higher reliability and safety, take into consideration that appropriate measures such as fail-safe functions and redundant system design should be taken.

Do not use the device for equipment that requires an extreme level of reliability, such as aerospace applications, telecommunication equipment (trunk lines), nuclear power control equipment and medical or other equipment for life support.

SHARP assumes no responsibility for any damage resulting from the use of the device which does not comply with the instructions and the precautions specified in these specification sheets.

Confirm "11. Handling Precautions " item when you use the device.

Contact and consult with a SHARP sales representative for any questions about this device.

## 2. Overview

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel, driver ICs, control circuit, power supply circuit and a back light unit. Graphics and texts can be displayed on a 1600×RGB×1200 dots panel with about 16,777,216 colors by using LDI (LVDS Display Interface) and supplying +5.0V DC supply voltages for TFT-LCD panel driving and applying +12.0V DC supply voltage for LED backlight-driving DC/DC converter.

It is a wide viewing-angle-module, high brightness(500cd/m<sup>2</sup>) and high speed response specification.

These LCD modules have corresponded with the RoHS directive.

## 3. Mechanical Specifications

Parameter	Specifications	Unit
Display size	59 (23.1") Diagonal	cm
Active area	470.4 (H)× 352.8 (V)	mm
Pixel format	1600 (H)× 1200 (V)	Pixel
	(1 pixel = R+G+B dots)	
Aspect ratio	4:3	
Pixel pitch	0.294 (H)× 0.294 (V)	mm
Pixel configuration	R, G, B vertical stripe	
Display mode	Normally black	
Unit outline dimensions *1	530.0(W)× 431.5(H) × 23.9(D)TYP	mm
Mass	4,500 (max)	g
Surface treatment (Haze value)	Anti-glare coating : (Haze value 40%, Hardness 2H)	

\*1.Note: excluding back light cables and connectors.

The thickness of module (D) doesn't contain the projection.

Outline dimensions are shown in Fig.1.

## 4. Input Terminals

### 4-1. TFT-LCD panel driving

CN1 (Interface signals and +5.0V power supply)

Using connectors : FI-WE31P-HFE (Japan Aviation Electronics Industry, Limited)

Corresponding connectors : FI-W31M (Japan Aviation Electronics Industry, Limited)

: FI-C3-A3-15000(Contact)

Using LVDS receiver : Type contained in a control IC

(DS90CF386 (NS Corporation) or equivalent)

Corresponding LDI Transmitter : DS90C387 (NS Corporation) or equivalent

※ Non-DC Balanced Mode

Table 4-1-1 LDI Interface signals

Pin No.	Symbol	Function	Remark
1	Vcc	+5V power supply	
2	Vcc	+5V power supply	
3	Vcc	+5V power supply	
4	Vcc	+5V power supply	
5	GND	GND	
6	GND	GND	
7	GND	GND	
8	NC	NC	
9	GMCH	Gamma control(High)	
10	GMCL	Gamma control(Low)	
11	RxO0-	Receiver signal of LDI (O0-)	LDI
12	RxO0+	Receiver signal of LDI (O0+)	LDI
13	RxO1-	Receiver signal of LDI (O1-)	LDI
14	RxO1+	Receiver signal of LDI (O1+)	LDI
15	RxO2-	Receiver signal of LDI (O2-)	LDI
16	RxO2+	Receiver signal of LDI (O2+)	LDI
17	RxO-	Receiver CLK of LDI(OC-)	LDI
18	RxO+	Receiver CLK of LDI(OC+)	LDI
19	RxO3-	Receiver signal of LDI (O3-)	LDI
20	RxO3+	Receiver signal of LDI (O3+)	LDI
21	RxE0-	Receiver signal of LDI (E0-)	LDI
22	RxE0+	Receiver signal of LDI (E0+)	LDI
23	RxE1-	Receiver signal of LVDS (E1-)	LDI
24	RxE1+	Receiver signal of LDI (E1+)	LDI
25	RxE2-	Receiver signal of LDI (E2-)	LDI
26	RxE2+	Receiver signal of LDI (E2+)	LDI
27	RxE3-	Receiver signal of LDI (E3-)	LDI
28	RxE3+	Receiver signal of LDI (E3+)	LDI
29	NC	NC	
30	LVDSGND	LVDSGND	
31	LVDSGND	LVDSGND	

Note1: Resistance (RVR) between GMCL and GMCH enables Gamma adjustment.

(See Fig.4-5-1: RVR=OPEN recommended)

Note2: There is a possibility that trouble occurs in initial and long-term reliability when using it besides corresponding connector.

## 4-2. Data Mapping


## 1) 8 bit input

Table 4-2-1 and Figure 4-2-2 shows the pin assignment of the input signals.

Table 4-2-1 LDI Input signals

VGA-TFT Data Signal	Input Pin (DS90C387)	Output Pin (DS90CF386)	LCD Unit Data Signal
MSB	R0	R16	RC0
	R1	R17	RC1
	R2	R10	RC2
	R3	R11	RC3
	R4	R12	RC4
	R5	R13	RC5
	R6	R14	RC6
	R7	R15	RC7
MSB	G0	G16	GC0
	G1	G17	GC1
	G2	G10	GC2
	G3	G11	GC3
	G4	G12	GC4
	G5	G13	GC5
	G6	G14	GC6
	G7	G15	GC7
MSB	B0	B16	BC0
	B1	B17	BC1
	B2	B10	BC2
	B3	B11	BC3
	B4	B12	BC4
	B5	B13	BC5
	B6	B14	BC6
	B7	B15	BC7
MSB		R16	RE0
		R17	RE1
		R10	RE2
		R11	RE3
		R12	RE4
		R13	RE5
		R14	RE6
		R15	RE7
MSB		G16	GE0
		G17	GE1
		G10	GE2
		G11	GE3
		G12	GE4
		G13	GE5
		G14	GE6
		G15	GE7
MSB		B16	BE0
		B17	BE1
		B10	BE2
		B11	BE3
		B12	BE4
		B13	BE5
		B14	BE6
		B15	BE7

## LDI Interface block diagram(Single input → Dual output)

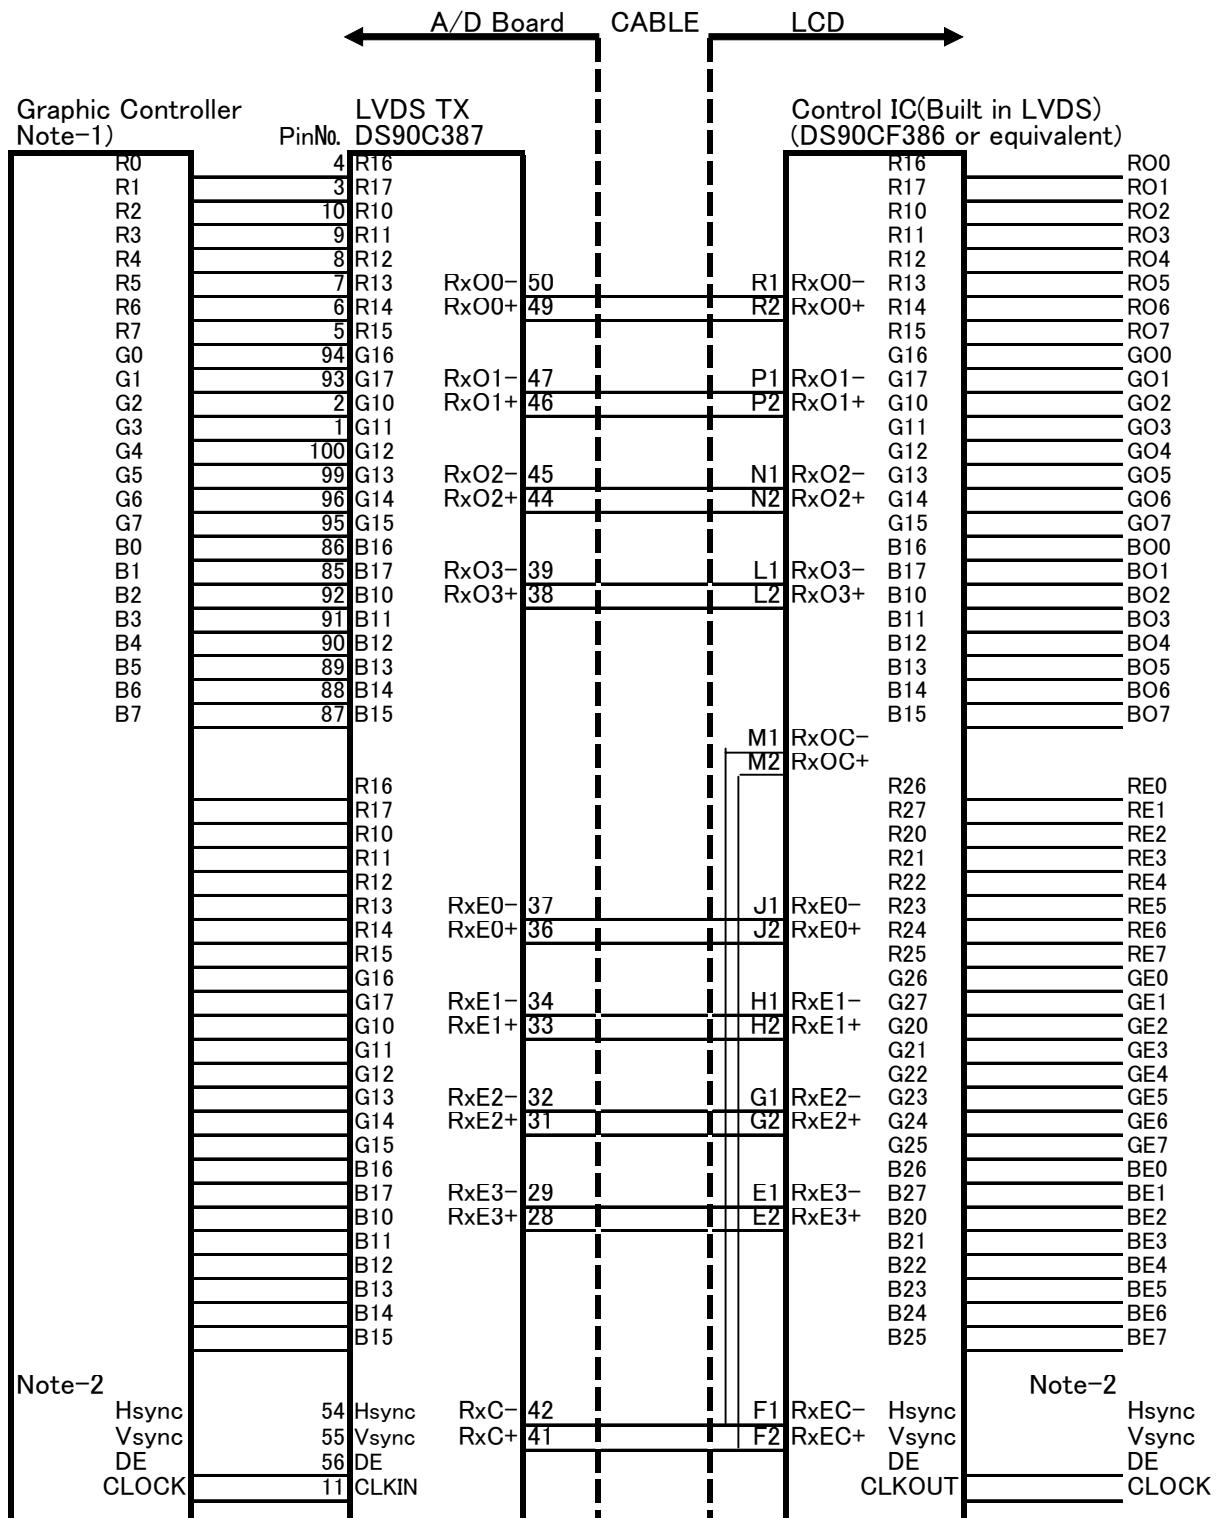

Note-1) Signal configuration

EVEN DATA(ROx, BOx, GOx: 1'st, 3'rd, 5'th.....data)

ODD DATA(REx, GEx, BEx : 2'nd, 4'th, 6'th.....data)

Note-2) Hsync, Vsync Not use.

Note-3) Use twisted differential cable (impedance = 100Ω)

Note-4) DS90C387: Non-DC Balanced Mode


Note-2

Hsync  
Vsync  
DE  
CLOCK

Figure 4-2-2 Interface pin assignment

Table 4-2-3 LDI Input signals (Dual input)

VGA-TFT Data Signal		Input Data Pin (DS90C387)	Output Data Pin (DS90CF386)	LCD Unit Data Signal
MSB	RE0	R16	R16	RO0
	RE1	R17	R17	RO1
	RE2	R10	R10	RO2
	RE3	R11	R11	RO3
	RE4	R12	R12	RO4
	RE5	R13	R13	RO5
	RE6	R14	R14	RO6
	RE7	R15	R15	RO7
MSB	GE0	G16	G16	GO0
	GE1	G17	G17	GO1
	GE2	G10	G10	GO2
	GE3	G11	G11	GO3
	GE4	G12	G12	GO4
	GE5	G13	G13	GO5
	GE6	G14	G14	GO6
	GE7	G15	G15	GO7
MSB	BE0	B16	B16	BO0
	BE1	B17	B17	BO1
	BE2	B10	B10	BO2
	BE3	B11	B11	BO3
	BE4	B12	B12	BO4
	BE5	B13	B13	BO5
	BE6	B14	B14	BO6
	BE7	B15	B15	BO7
MSB	RO0	R26	R26	RE0
	RO1	R27	R27	RE1
	RO2	R20	R20	RE2
	RO3	R21	R21	RE3
	RO4	R22	R22	RE4
	RO5	R23	R23	RE5
	RO6	R24	R24	RE6
	RO7	R25	R25	RE7
MSB	GO0	G26	G26	GE0
	GO1	G27	G27	GE1
	GO2	G20	G20	GE2
	GO3	G21	G21	GE3
	GO4	G22	G22	GE4
	GO5	G23	G23	GE5
	GO6	G24	G24	GE6
	GO7	G25	G25	GE7
MSB	BO0	B26	B26	BE0
	BO1	B27	B27	BE1
	BO2	B20	B20	BE2
	BO3	B21	B21	BE3
	BO4	B22	B22	BE4
	BO5	B23	B23	BE5
	BO6	B24	B24	BE6
	BO7	B25	B25	BE7

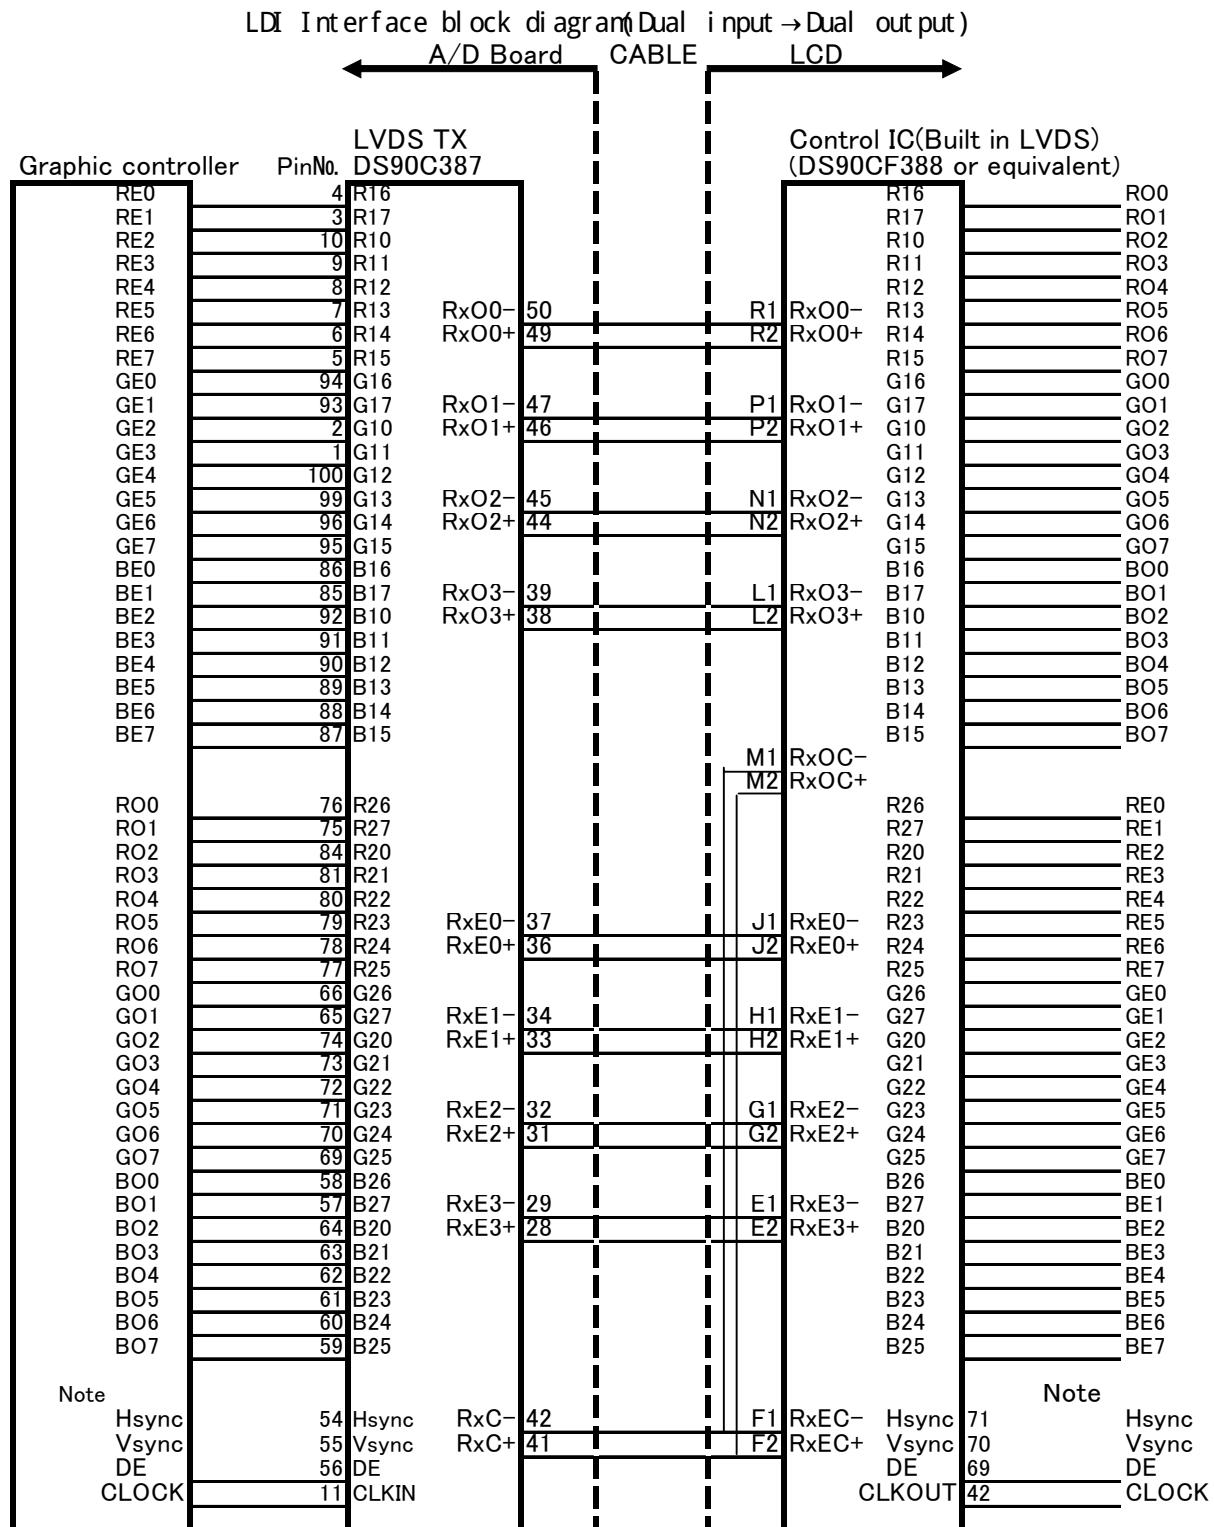


Note-1 Hsync, Vsync Not use

Note-2 Use twisted differential cable ( impedance = 100Ω )

Note-3 DS90C387: Non-DC Balanced Mode

Figure 4-2-4 Interface pin assignment

## 4-3. Input signal timing chart

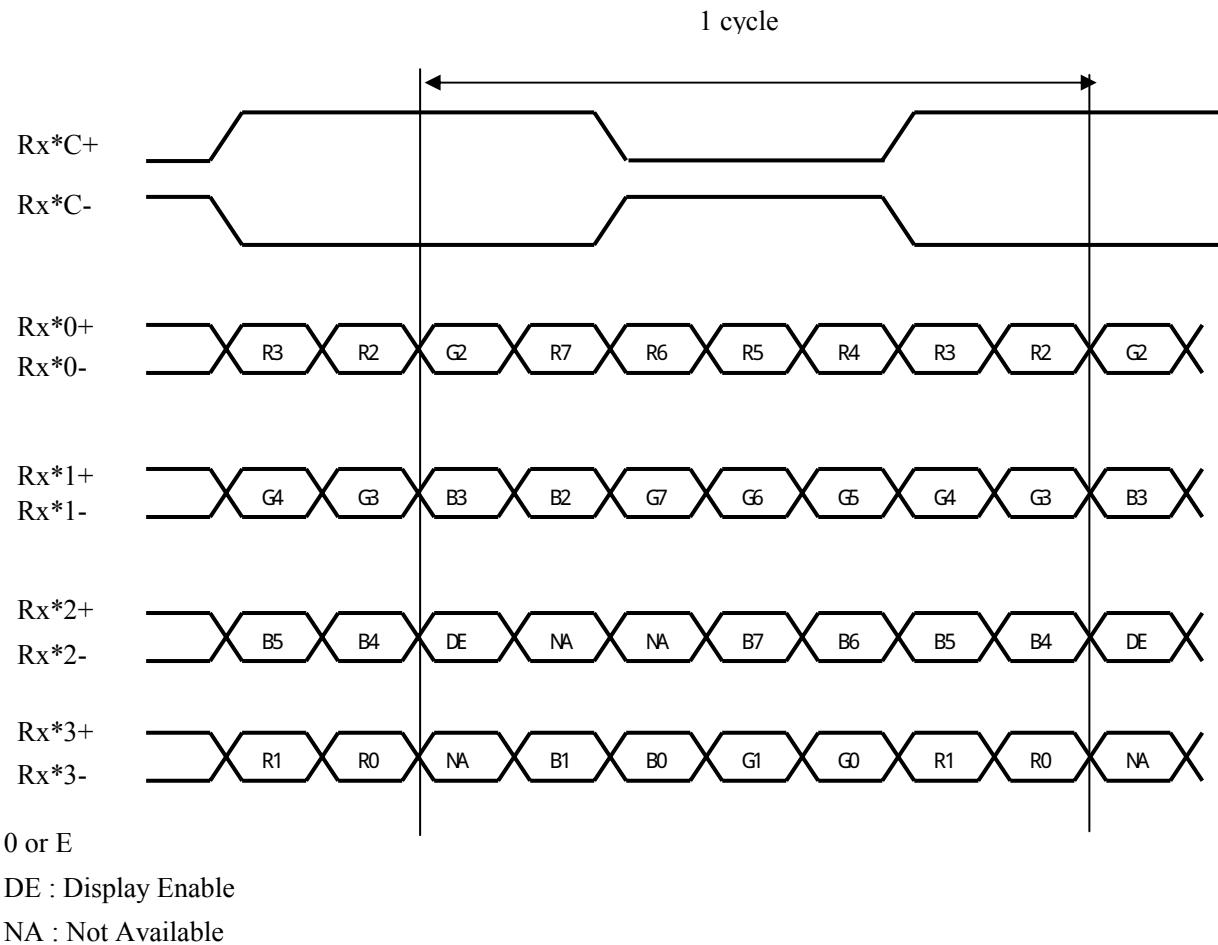

## 4-4. Backlight

CN2

Using connector : S12B-PH-SM4-TB (JST)

Corresponding connector : PHR-12 (JST) (Cable : AWG#24 recommended )

Pin No.	Symbol	Function	Remark
1	V <sub>LED</sub>	+12.0V LED Backlight power supply	
2	V <sub>LED</sub>	+12.0V LED Backlight power supply	
3	V <sub>LED</sub>	+12.0V LED Backlight power supply	
4	V <sub>LED</sub>	+12.0V LED Backlight power supply	
5	V <sub>LED</sub>	+12.0V LED Backlight power supply	
6	LED GND	LED GND	
7	LED GND	LED GND	
8	LED GND	LED GND	
9	LED GND	LED GND	
10	LED GND	LED GND	
11	V <sub>ent</sub>	BL ON/OFF	
12	V <sub>vr</sub>	Brightness control	

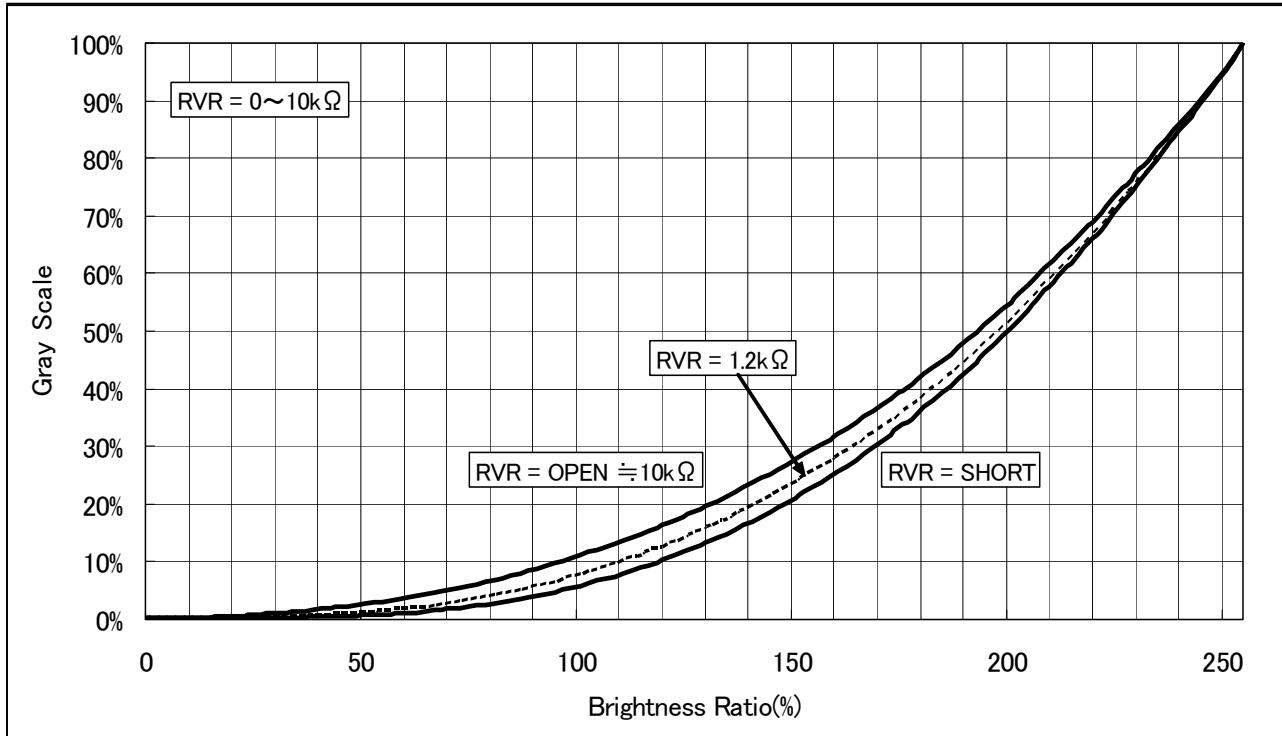


Figure 4-5-1 Gamma characteristics

Note) Fig.4-5-1 shows reference characteristics but dose not guarantee it.

### 5. Absolute Maximum Ratings

Parameter	Symbol	Condition	Terminal Symbol	Ratings		Unit	Remark
Supply voltage	V <sub>CC</sub>	T <sub>a</sub> =25°C	V <sub>CC</sub>	-0.3	~ + 6.0	V	【Note1】
LED Supply voltage	V <sub>LED</sub>	T <sub>a</sub> =25°C	V <sub>LED</sub>	-0.3	~ + 14.0	V	
Input voltage	V <sub>L</sub>	T <sub>a</sub> =25°C	LVDS input signal	-0.3	~ + 3.6	V	
	V <sub>CNT</sub>	T <sub>a</sub> =25°C	V <sub>CNT</sub>	-0.3 ~ V <sub>LED</sub>		V	
	V <sub>VR</sub>	T <sub>a</sub> =25°C	V <sub>VR</sub>	0 ~ 4.0		V	
LED temperature	T <sub>LED</sub>	-	-	+90		°C	【Note2】
Storage temperature	T <sub>STG</sub>	Ambient	-	-20 ~ + 65		°C	【Note1】
Operating temperature	T <sub>OPA</sub>	Ambient	-	min	0	°C	【Note1】
		Panel surface (Active area)	-	max	+ 60		

【Note1】Humidity : 90%RH Max. ( T<sub>a</sub> ≤ 40°C )

Maximum wet-bulb temperature at 39°C or less. ( T<sub>a</sub>>40°C )

No condensation.

【Note2】The measurement point refers to Fig. 1.

【Note3】There is a possibility of causing deterioration in the irregularity and others of the screen

and the display fineness when preserving or using it in more than 60°C.

【Note4】When ambient temperature is more than 50°C, please cool the back side of the LCD module by a fan.

## 6. Electrical Characteristics



## 6-1. TFT-LCD panel driving

 $T_a = +25^\circ C$ 

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
Supply voltage		$V_{CC}$	+4.75	+5.0	+5.25	V	【Note2】
Current dissipation	$V_{CC}=5.0V$	$I_{CC}$	-	1100	1800	mA	【Note3】
Input voltage for LDI	LDI signal	$V_L$	0	-	2.4	V	
Permissive input ripple voltage		$V_{RP}$	-	-	100	mVp-p	$V_{CC}=+5.0V$
Differential input threshold voltage	High	$V_{TH}$	-	-	$V_{CM}+100$	mV	$V_{CM}=+1.2V$
	Low	$V_{TL}$	$V_{CM}-100$	-	-	mV	【Note1】
Terminal resistor		$R_T$	-	100	-	$\Omega$	Differential input

【Note1】  $V_{CM}$  : Common mode voltage of LDI driver.

【Note2】 On-off condition for supply voltage

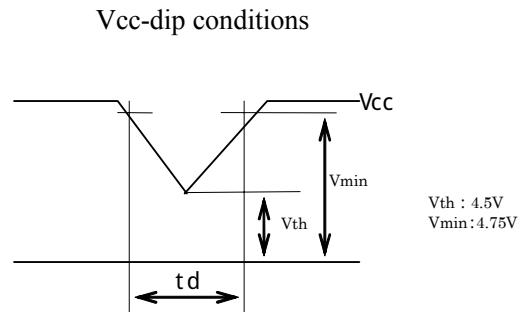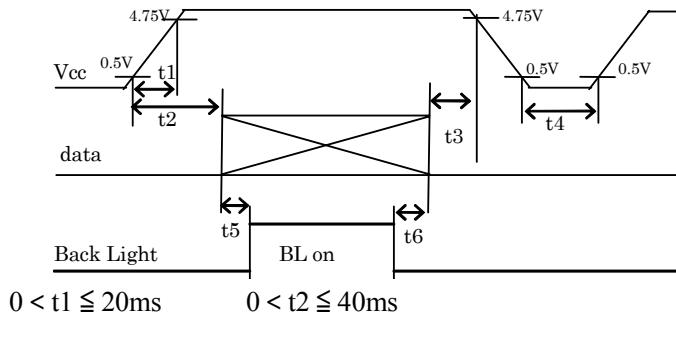1)  $V_{th} \leq V_{CC} < V_{min}$  $t_d \leq 20\text{ms}$ 2)  $V_{CC} < V_{th}$ 


Vcc-dip conditions should also follow the on-off conditions for supply voltage.

【Note3】 Current dissipation


Standard value: 16-gray-bar pattern

(Measurement condition  $V_{CC}=+5.0V$ ,  $1/T_c=81\text{MHz}$ ,  $T_a=25^\circ C$ )

Refer to Chapter 8 for RGB each gray scale

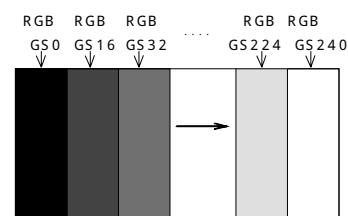

Maximum value: vertical 2dot checker (0/256-255/256)

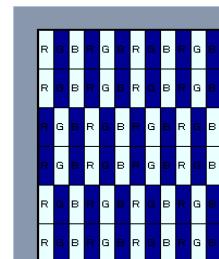(Measurement condition  $V_{CC}=+4.75V$ ,  $1/T_c=81\text{MHz}$ ,  $T_a=25^\circ C$ )

## 6-2. Backlight

The backlight system is an edge-lighting type with white-LED.

(It is usually required to measure under the following condition. condition:  $T_a=25^\circ\text{C}\pm 2^\circ\text{C}$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Supply voltage	$V_{\text{LED}}$	11.4	12.0	12.6	V	
Current dissipation	$I_{\text{LED}}$	-	5.0	5.8	A	$V_{\text{LED}} = 12.0\text{V}$ $V_{\text{vr}} = 0\text{V}$
Brightness Control Voltage	$V_{\text{VR}}$	0	-	3.5	V	【Note1】
LED ON/OFF Low Voltage	$V_{\text{cntL}}$	0	—	1.0	V	【Note2】
LED ON/OFF High Voltage	$V_{\text{cntH}}$	4.5	—	$V_{\text{LED}}$	V	【Note2】
LED life time	-	30,000	50,000	-	h	LED only

The reference LED life time is 30,000h defined by below.

( Continuous turning on at LED Junction temperature ( $T_j$ )  $100^\circ\text{C}$ ,  
 LED Current ( $I_f$ ) = 150mA (equal to Max.Brightness)  
 A state only for LED )


When a brightness of LED surface became 50% of the specifications minimum.

【Note1】  $V_{\text{VR}}$  input :  $0\text{V} = \text{Max.Brightness}$      $3.5\text{V} = \text{Min. Brightness}$


【Note2】  $V_{\text{cnt}}$  input : Low or OPEN = BL turn on    High = BL turn off

【Note3】

On-off condition for supply voltage

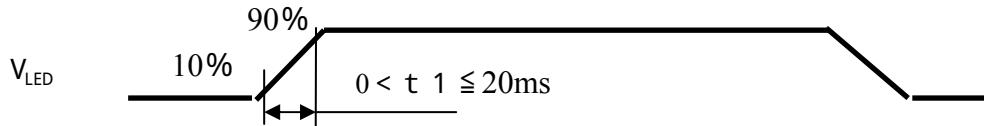

$V_{\text{LED}}$ -dip conditions

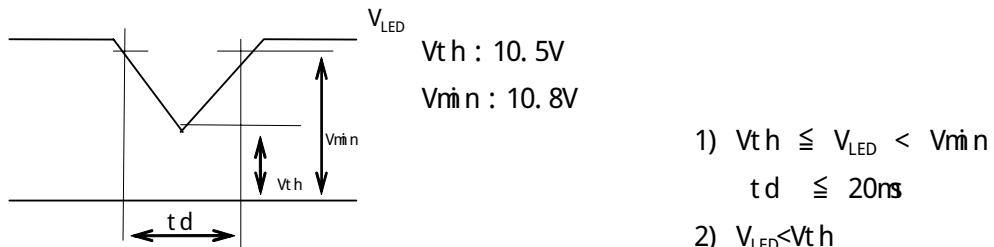

## 7. Timing characteristics of input signals


## 7-1. Timing characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
Clock signal	Frequency	1/Tc	77.18	81	85	MHz	
ENAB signal	Horizontal period	TH	865	1080	1130	clock	【Note2】
			11.3	13.3	14.65	μs	
	Horizontal period (High)	THd	800	800	800	clock	
ENAB signal	Vertical period	TV	1220	1250	1280	line	【Note1】 【Note2】
			15.9	16.7	17.5	ms	
	Vertical period (High)	TVd	1200	1200	1200	line	

【Note1】 In case of using the long vertical period, the deterioration of display quality, flicker etc. may occur.

【Note2】 The horizontal display position is determined by ENAB signal and the input data corresponding to the rising edge of DCLK is displayed at the left end of the active area.

Regarding the vertical display position, the data starting from following ENAB rising is displayed at the top of the active area in case of no rising ENAB more than 2003clk from ENAB rising.

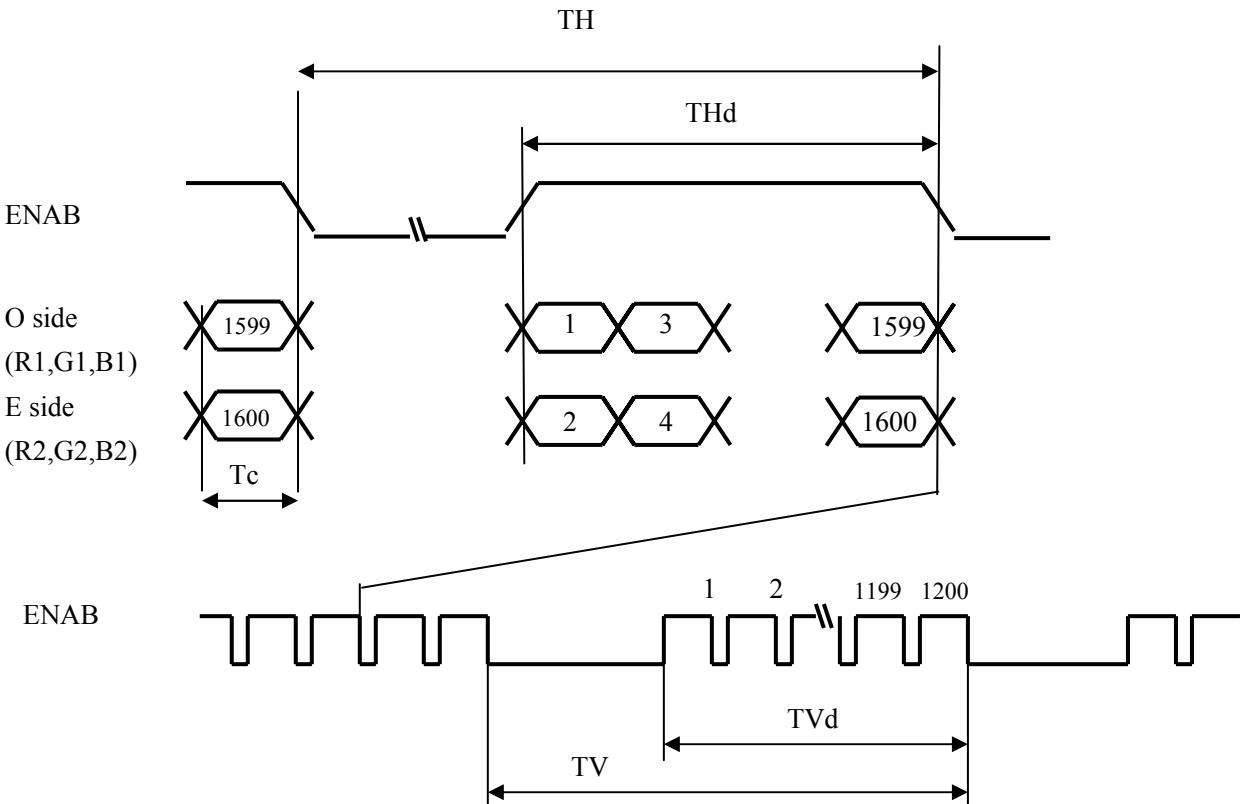


## 7-2. Input Data Signals and Display Position on the screen

Display position of input data (H, V)

Two pixels data is sampled at the same time.

- ※ DO (odd 1 data): R00 ~ R07, G00 ~ G07, B00 ~ B07
- ※ DE (even 1 data): RE0 ~ RE7, GE0 ~ GE7, BE0 ~ BE7

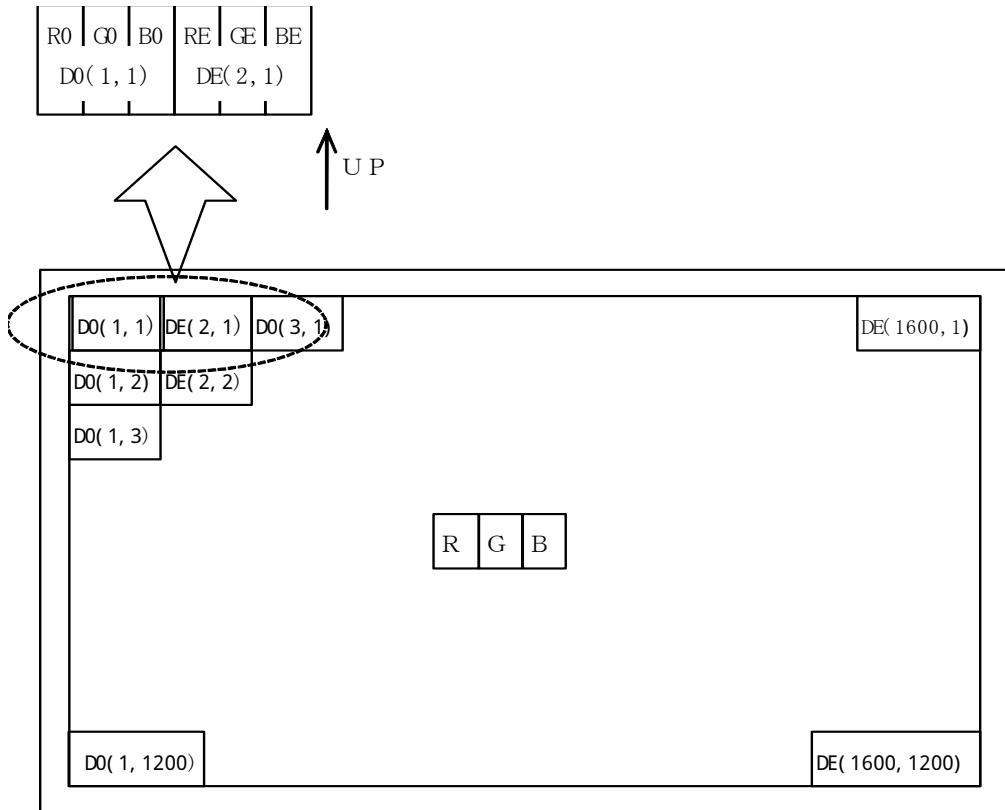

## 8. Input Signals, Basic Display Colors and Gray Scale of Each Color

## 8-1. 8bit input

Colors & Gray scale	Gray Scale	Data signal																							
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7
Basic Color	Black	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	-	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	-	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	-	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	-	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑ Darker	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	2	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↓ Brighter	253	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	254	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	255	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑ Darker	1	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of Green	2	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	↓ Brighter	253	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0
	254	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0
	Green	255	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑ Darker	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	2	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0	0
	↓ Brighter	253	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1
Gray Scale of Blue	254	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	1	1	1	1
	Blue	255	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1

0 : Low level voltage, 1 : High level voltage.

Each basic color can be displayed in 256 gray scales of red, 256 gray scales of green, and 256 gray scales of blue from 8 bit data signals. According to the combination of total 24 bit data signals, 16,777,216 color display can be achieved on the screen.

## 9. Optical Characteristics

Ta=25°C, Vcc =+5.0V

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angle range	Horizontal $\theta_{21}, \theta_{22}$	CR > 10	85	-	-	Deg.	【Note2,4】
	Vertical $\theta_{11}, \theta_{12}$		85	-	-	Deg.	
	All direction $\theta$		-	80	-	Deg.	
Contrast ratio	CRn	Optimum viewing angle	350	600	-		【Note2,4】
Response Time (Black → White → Black)	$\tau_r + \tau_d$	$\theta = 0^\circ$	-	12	-	ms	【Note3(Condition2),4,5】
Response Time Rise or decay (Gray scale)	$\tau_{avg}$		-	8	-	ms	Average response time
Chromaticity of White	x	$\theta = 0^\circ$	0.257	0.292	0.337		【Note4】
	y		0.290	0.315	0.370		
Chromaticity of Red	x		-	0.629	-		
	y		-	0.362	-		
Chromaticity of Green	x		-	0.322	-		
	y		-	0.610	-		
Chromaticity of Blue	x		-	0.149	-		
	y		-	0.108	-		
Luminance of white	YLI		400	500	-	cd/m <sup>2</sup>	【Note4】
White Uniformity	$\delta_w$		-	-	1.33		【Note5】

※ The measurement shall be executed 30 minutes after lighting at rating.

The optical characteristics shall be measured in a dark room or equivalent state with the method shown in Fig.9 below.

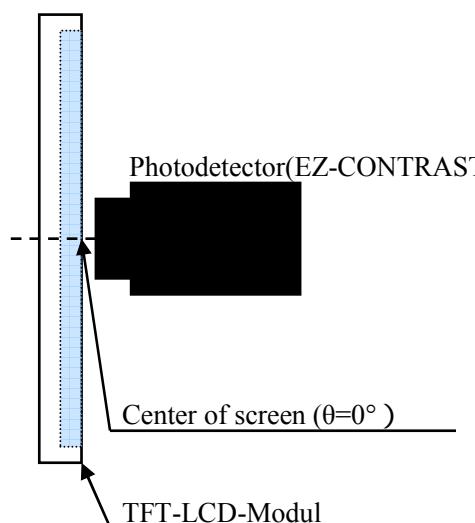


Fig9-1 Viewing angle measurement method


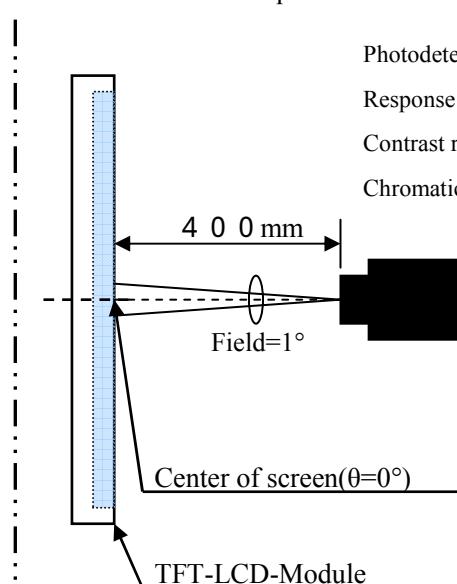


Fig9-2 Luminance/Contrast ratio/Response time/Chromaticity

Fig9 Optical characteristics measurement method

measurement method

【Note1】Definitions of viewing angle range:

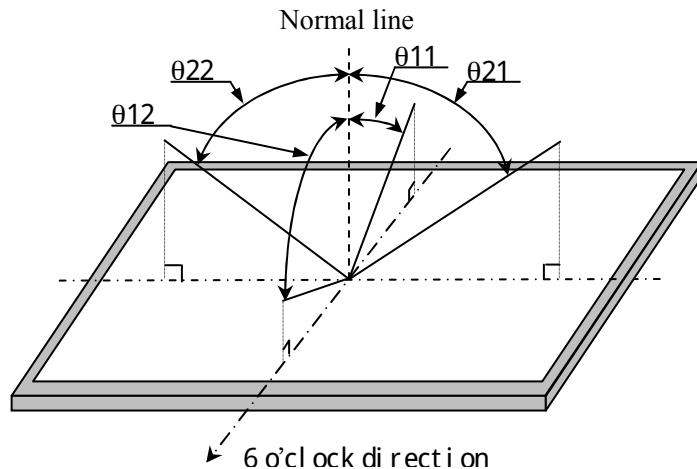


【Note2】Definition of contrast ratio:

The contrast ratio is defined as the following.

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance (brightness) with all pixels white}}{\text{Luminance (brightness) with all pixels black}}$$

【Note3】Definition of response time:

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

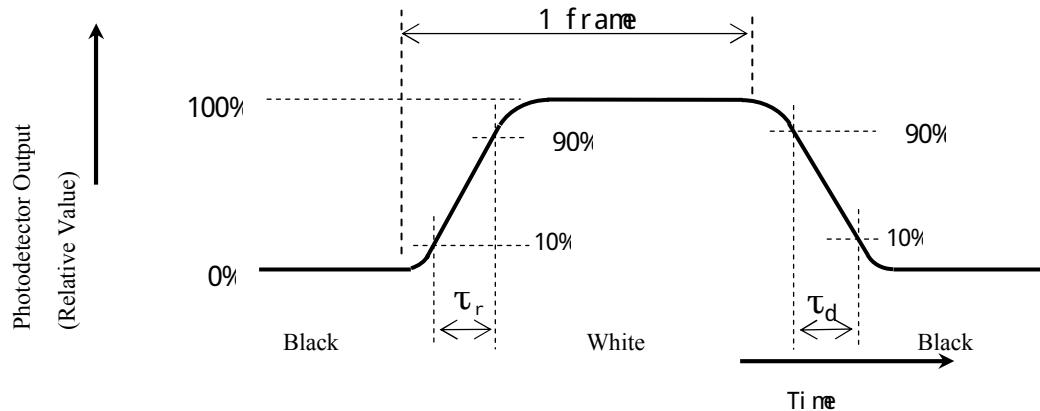


【Note4】This shall be measured at center of the screen.

【Note5】Definition of white uniformity:

White uniformity is defined as the following with nine measurements (①~⑨).

$$\delta W = \frac{(\text{Maximum luminance } ① \sim ⑨)}{(\text{Minimum luminance } ① \sim ⑨)}$$

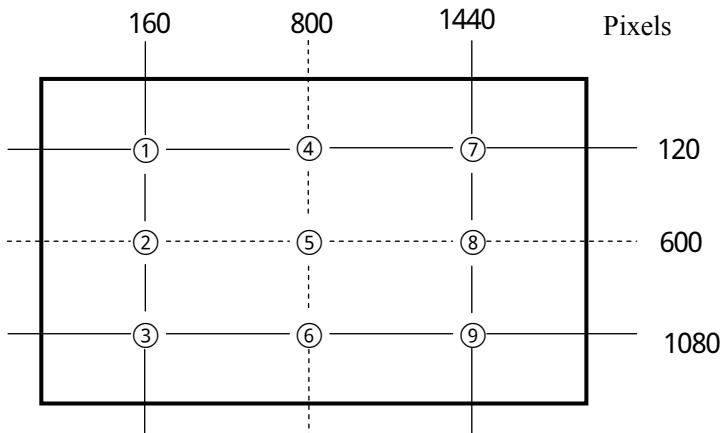

## 10. Display dignity

The item concerning externals and the display dignity is decided by the shipment inspection standard book..

## 11. Handling Precautions

- a) Be sure to turn off the power supply when inserting or disconnecting the cable.
- b) Be sure to design the cabinet so that the module can be installed without any extra stress such as warp or twist.
- c) Since the front polarizer is easily damaged, pay attention not to scratch it.  
Blow away dust on the polarizer with antistatic N<sub>2</sub> blow. It is undesirable to wipe off because a polarizer is sensitive.  
It is recommended to peel off softly using the adhesive tape when soil or finger oil is stuck to the polarizer.  
When unavoidable, wipe off carefully with a cloth for wiping lenses.
- d) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- e) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- f) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.  
Handle with care.
- g) Since CMOS LSI is used in this module, take care of static electricity and set the human earth when handling. Observe all other precautionary requirements in handling components.
- h) Since there is a circuit board in the module back, stress is not added at the time of a design assembly.  
If stress is added, there is a possibility that circuit parts may be damaged.
- i) Protection film is attached to the module surface to prevent it from being scratched .  
Peel the film off slowly, just before the use, with strict attention to electrostatic charges.  
Blow off 'dust' on the polarizer by using ionized nitrogen.
- j) The polarizer surface on the panel is treated with Anti-Glare for low reflection. In case of attaching protective board over the LCD, be careful about the optical interface fringe etc. which degrades display quality.
- k) Do not expose the LCD panel to direct sunlight.  
Lightproof shade etc. should be attached when LCD panel is used under such environment.  
If a light strong against a LCD panel is irradiated, it may lead to degradation of the panel characteristic and display grace may get worse.
- l) Connect GND to 4 place of mounting holes to stabilize against EMI and external noise.
- m) When handling LCD modules and assembling them into cabinets, please be noted that long-term storage in the environment of oxidization or deoxidization gas, and the use of such materials as reagent, solvent, adhesive, resin, etc. which generate these gasses, may cause corrosion, discoloration, degradation of display grace, and abnormalities of operation.
- n) When install LCD modules in the cabinet, please tighten with "torque = max 0.441 N·m (max 4.5kgf·cm).  
Be sure to confirm it in the same condition as it is installed in your instrument.
- o) Liquid crystal contained in the panel may leak if the LCD is broken. Rinse it as soon as possible if it gets inside your eye or mouth by mistake.
- p) Notice : Never dismantle the module , because it will cause failure.  
Moreover, please do not peel off and do not cut the tapes pasted to the product.  
However, the tape fixed panel protection film is excluded.
- q) Be careful when using it for long time with fixed pattern display as it may cause afterimage.  
(Please use a screen saver etc., in order to avoid an afterimage.)
- r) Adjusting volume has been set optimally before shipment, so do not change any adjusted value.  
If adjusted value is changed, the specification may not be satisfied.
- s) If a minute particle enters in the module and adheres to an optical material, it may cause display non-uniformity issue, etc. Therefore, fine-pitch filters have to be installed to cooling and inhalation hole if you intend to install a fan.
- t) The LED used for this product is very sensitive to the temperature. Luminance decreases rapidly when it is used for a long time under the environment of the high temperature. Please consult our company when it is used under the environment like the above mentioned.
- u) Epoxy resin (amine series curing agent), silicone adhesive material (dealcoholization series and oxime series), tray forming agent (azo compound) etc, in the cabinet or the packing materials may induce abnormal display with polarizer film deterioration regardless of contact or noncontact to polarizer film.  
Be sure to confirm the component of them.

## 12. Packing form

Product countries / Areas	JAPAN
Piling number of cartons	8 (MAX)
Packing quantity in one carton	2pcs
Carton size [mm]	630(W) × 515(D) × 195(H)
Total mass of one carton filled with full modules	11kg
Packing form is shown	Page 22 ( Fig.2 )

## 13 . Reliability test items

No	Test item	Conditions	
1	High temperature storage test	Ta = 65°C 240h	
2	Low temperature storage test	Ta = -20°C 240h	
3	High temperature & high humidity operation test	Ta = 40°C ; 90%RH 240h (No condensation)	
4	High temperature operation test	Ta = 60°C 240h (Panel surface:Activ Area)	
5	Low temperature operation test	Ta = 0°C 240h	
6	Vibration test	Waveform : Sine wave Frequency : 10 ~ 57Hz/Vibration width (one side) : 0.076mm : 57 ~ 500Hz/Gravity : 9.8m/s <sup>2</sup> Sweep time : 11minutes Test period : 3 hours (1 hour for each direction of X,Y,Z)	【Note】
7	Shock test	Max. gravity : 147m/s <sup>2</sup> Pulse width : 6ms, sine half-wave Direction : ± X, ± Y, ± Z, once for each direction.	

## 【Note】



A gap of panel shall not occur by vibration or the shock.

## 【Result Evaluation Criteria】


Under the display quality test conditions with normal operation state, these shall be no change which may affect practical display function.

## 14. Others

## 14-1. Lot No. Label

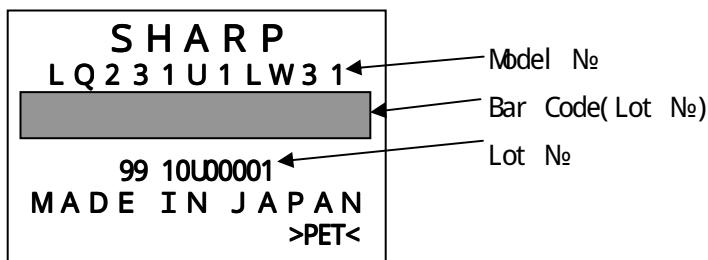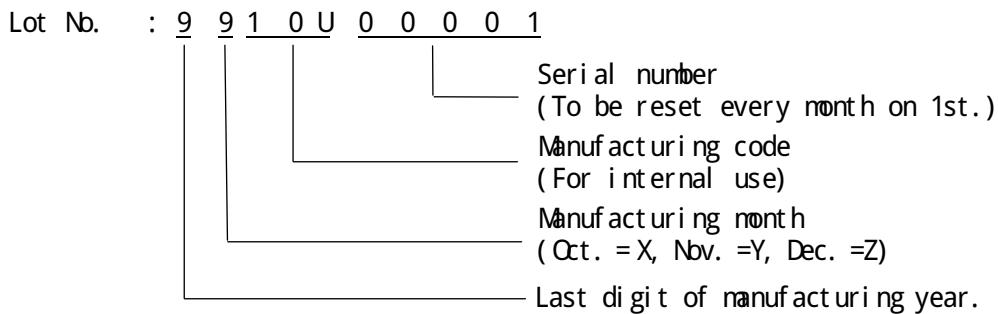

## 14-2. Packing box Label

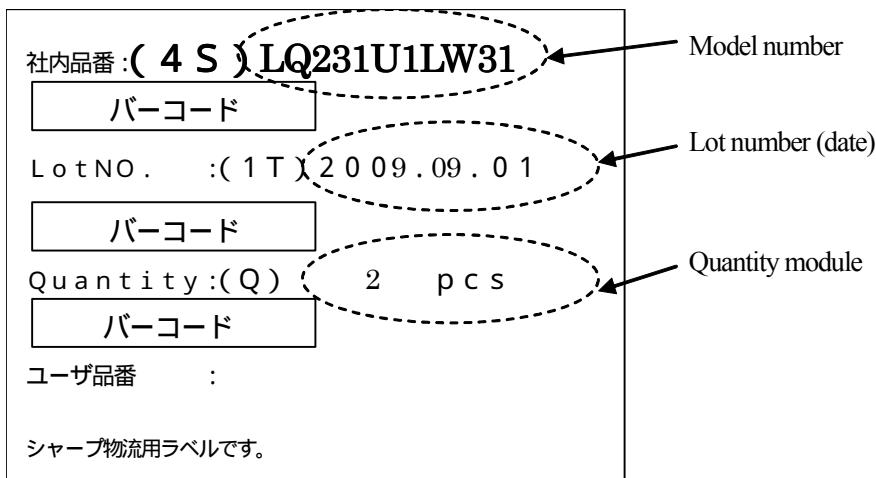

14-3. The chemical ozone depleting substance is not used.

14-4. If any problem occurs in relation to the description of this specification, it shall be resolved through discussion with spirit of cooperation.

The figure left below (cardboard box recycling symbol mark) is written to the packing box.

And, the figure right below is written to the packing box of the settlement for the RoHS restriction.

※ R.C. (RoHS Compliance) means it suits the RoHS directive.

This LCD module is compliant with RoHS Directive.



Cardboard box ·  
Recycling symbol mark



Mark for RoHS directive

## 15 . Range of storage temperature and humidity environmental condition

Temperature 0 ~ 40°C

Relative humidity 90% and below

- ( Note ) • Please manage as average value of the storage temperature and humidity environment referring to the following condition.

Summer 20 ~ 35°C 85% and below, Winter 5 ~ 15°C 85% and below

- Please manage within 240 hours in total at the time kept under the environment of 40°C 90%RH.

### Direct sunlight

Please keep it in the state of wrapping or the darkroom so that direct sunshine should not strike directly into the product.

### Ambient atmosphere

Please do not keep it in the place with the danger of the generation of the causticity gas and the volatile solvent.

### Dewy condensation prevention



- Please do not put the wrapping box directly on the floor, and keep it on palette or rack to avoid dewy condensation.

Moreover, please put it in a constant direction correctly to improve ventilation under the palette.

- Please separate from the wall in the storage warehouse and keep it.
- Please pay attention that ventilation is improved, and set up the ventilator etc. in the warehouse.
- Please manage so that there is no rapid temperature change more than natural environment.

### Storage period

Please keep within one year under the above-mentioned storage condition.

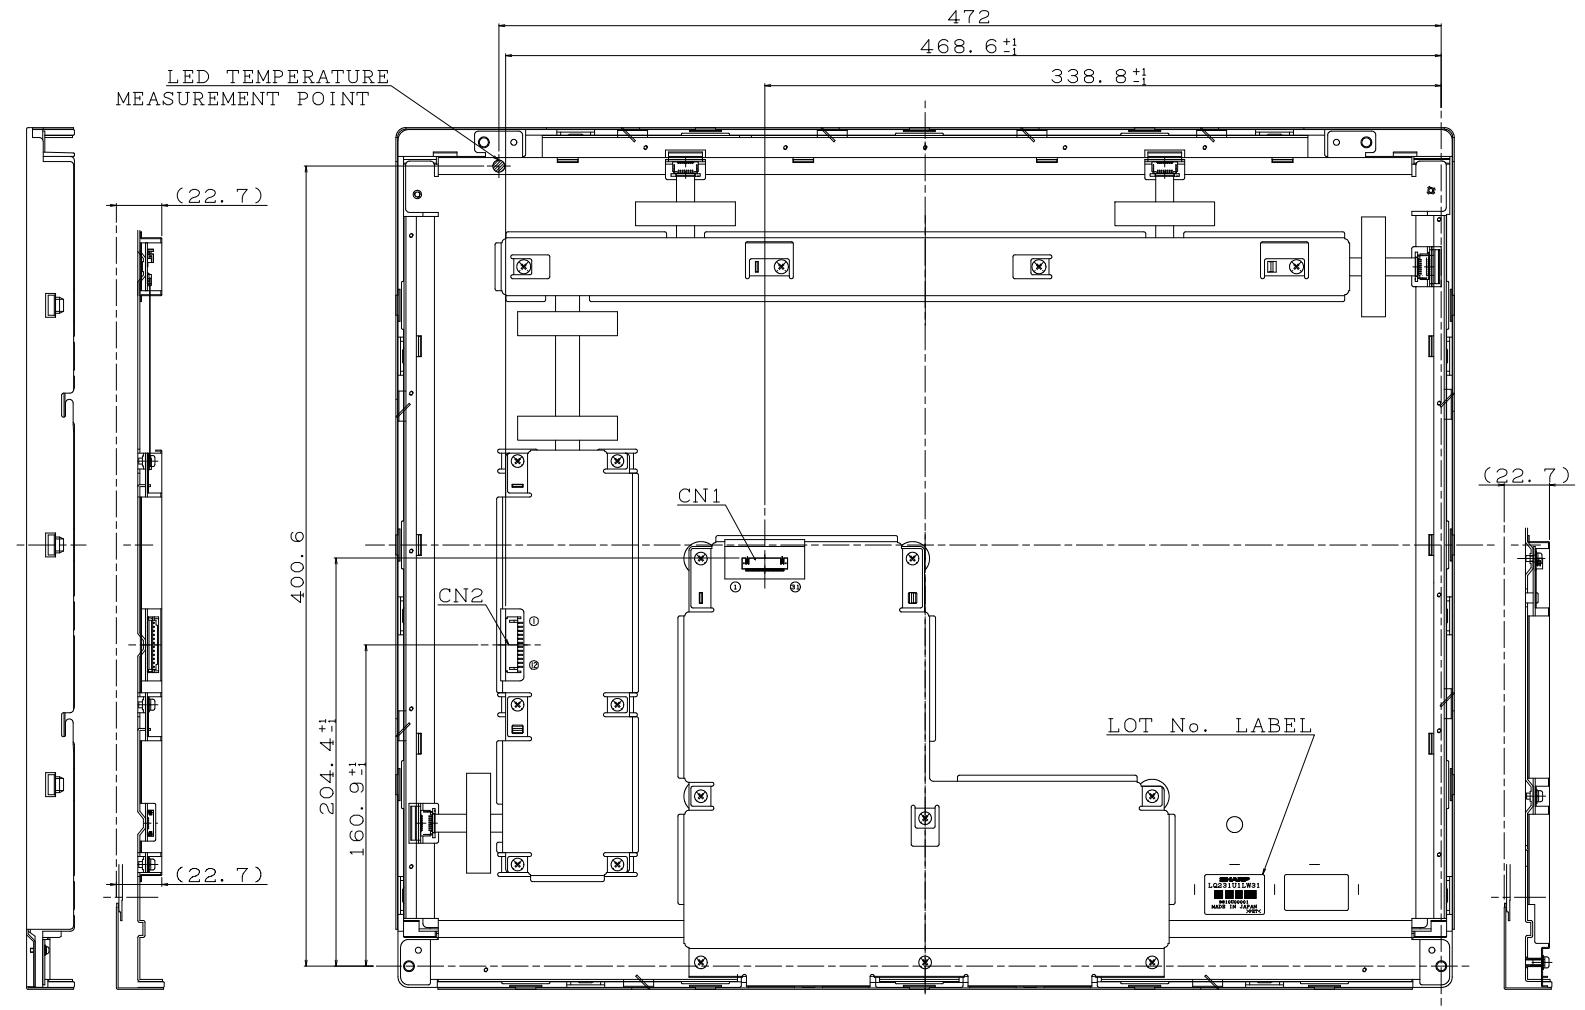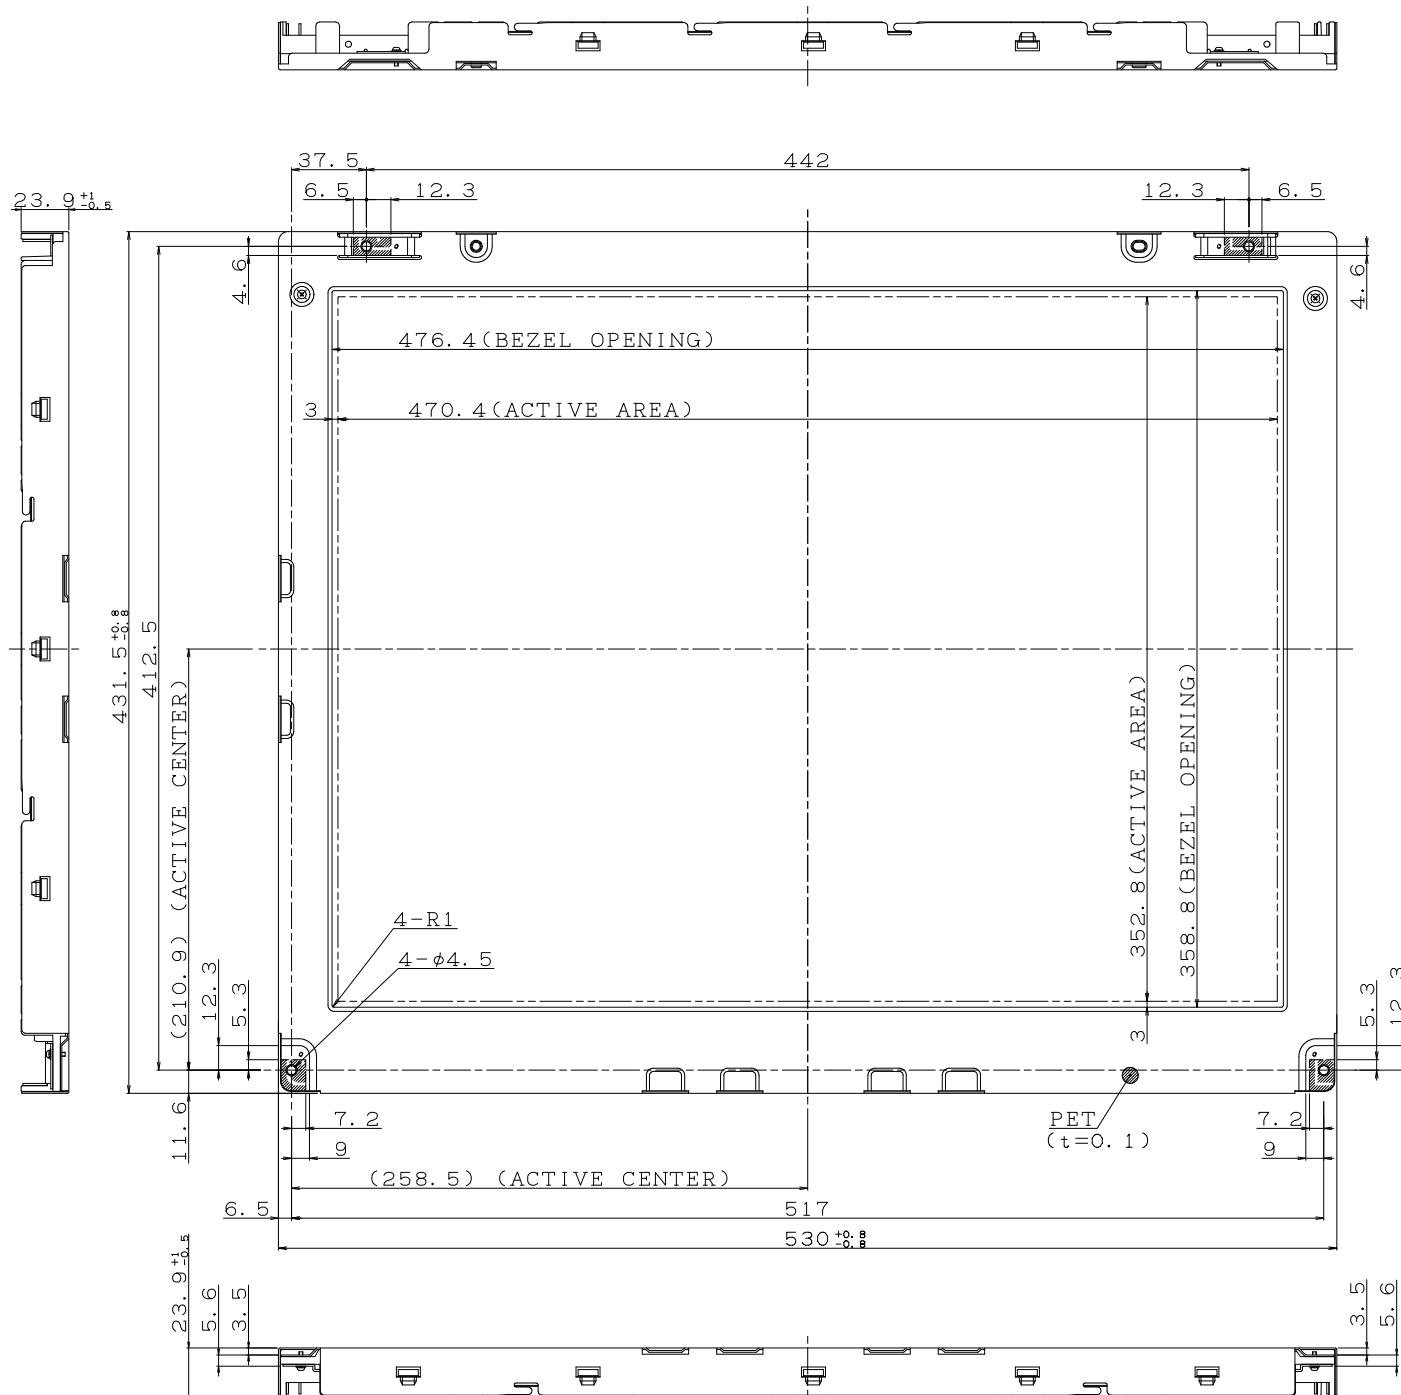

CN1: Japan Aviation Electronics Industry, Limited  
MODEL No. FI-WE31P-HFE

1	Vcc	9	GMCH	17	RxO-	25	RxE2-
2	Vcc	10	GMCL	18	RxO+	26	RxE2+
3	Vcc	11	RxO0-	19	RxO3-	27	RxE3-
4	Vcc	12	RxO0+	20	RxO3+	28	RxE3+
5	GND	13	RxO1-	21	RxE0-	29	NC
6	GND	14	RxO1+	22	RxE0+	30	LVDSGND
7	GND	15	RxO2-	23	RxE1-	31	LVDSGND
8	NC	16	RxO2+	24	RxE1+		

CN1 PIN ASSIGN

CN2: Japan Solderless Terminal Mfg Co Ltd(JST)  
MODEL No. S12B-PH-SM4-TB

1	VLED	7	LED GND
2	VLED	8	LED GND
3	VLED	9	LED GND
4	VLED	10	LED GND
5	VLED	11	Vcnt
6	LED GND	12	Vvr

CN2 PIN ASSIGN

- 1) TOLERANCE X-DIRECTION A: 3.0  $\pm 0.8$
- 2) TOLERANCE Y-DIRECTION B: 3.0  $\pm 0.8$
- 3) TOLERANCE Y-DIRECTION C: 3.0  $\pm 0.8$
- 4) TOLERANCE Y-DIRECTION D: 3.0  $\pm 0.8$
- 5) OBLIQUITY OF DISPLAY AREA |E-F| < 0.8

UNSPECIFIED TOLERANCE TO BE  $\pm 1.0$ 

UNIT:mm

Fig 1 : LQ231U1LW31 Outline dimensions

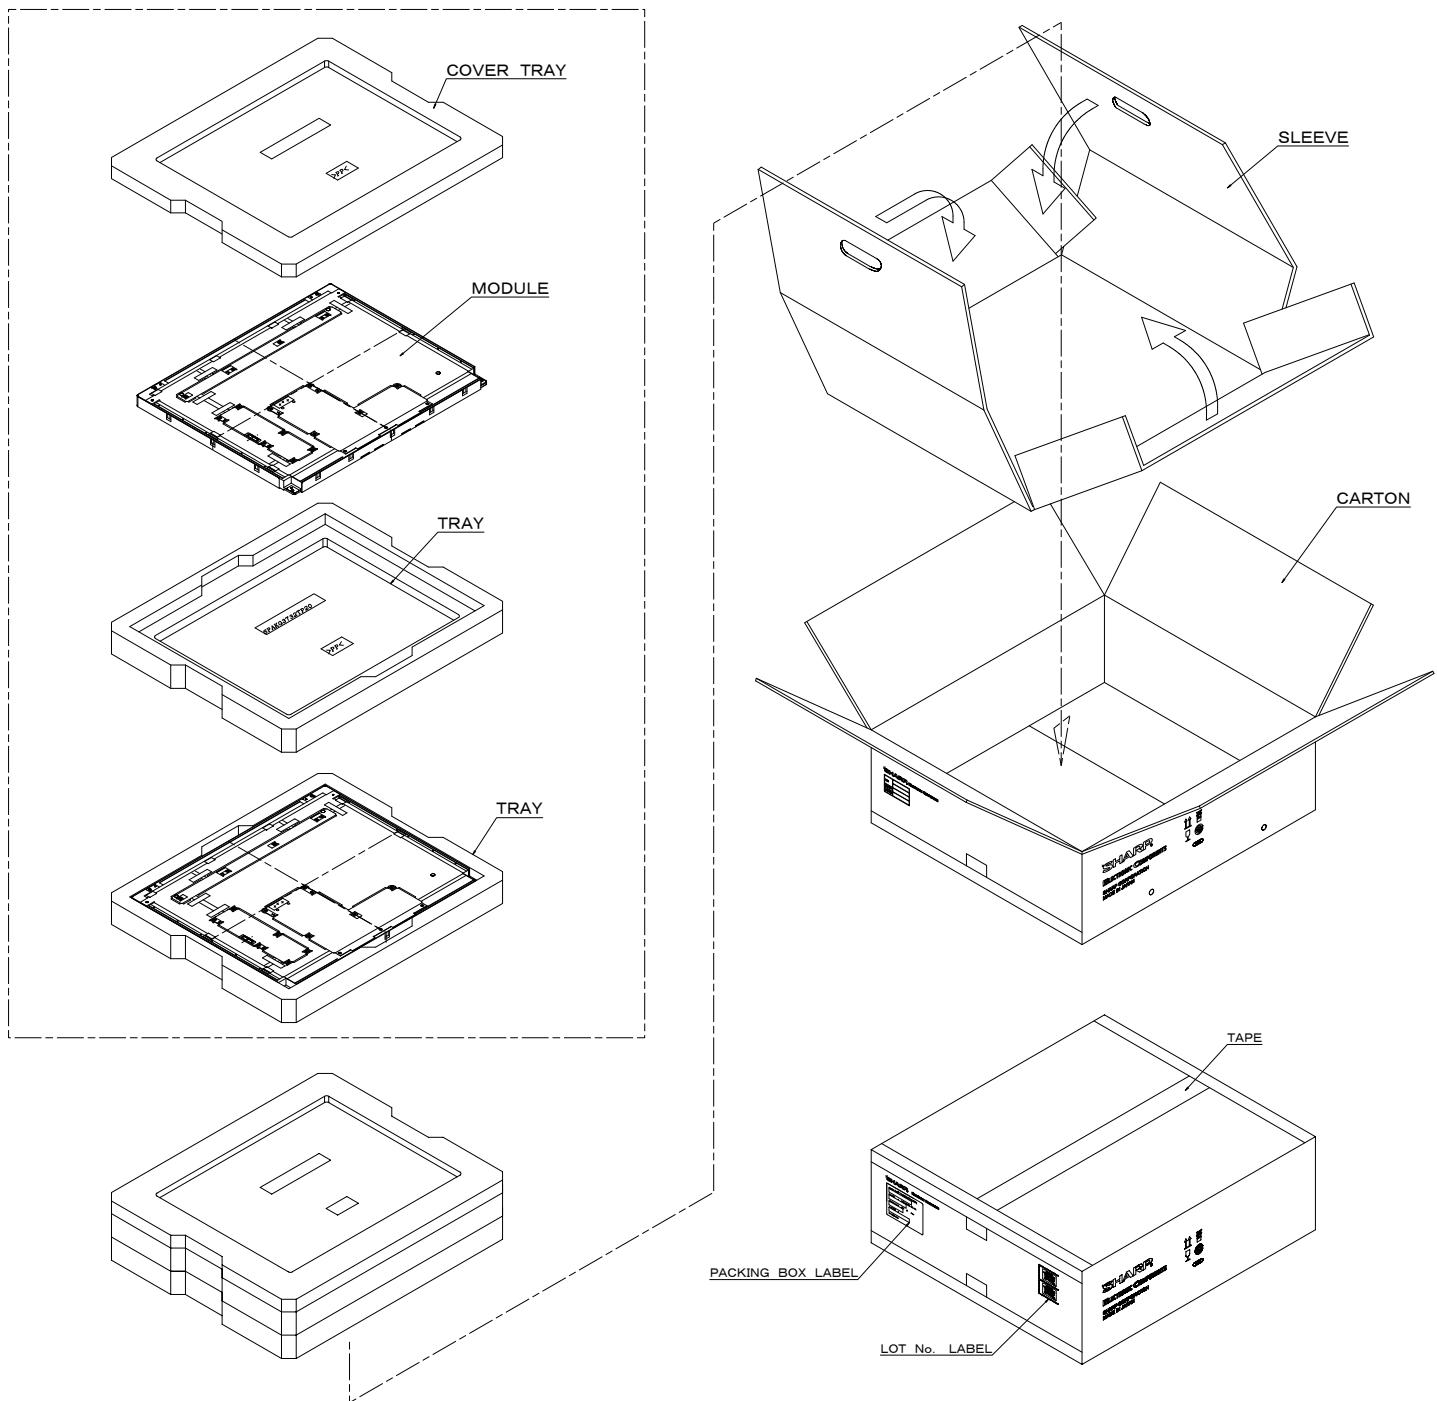


Fig2:Packing Form