

**MODEL NO. : TM035KVZ29****ISSUED DATE: 2012-10-29****VERSION : Ver 1.0**

- ☒ Preliminary Specification
☐ Final Product Specification

Customer :

Approved by	Notes

SHENZHEN AVIC Confirmed :

Prepared by	Checked by	Approved by

This technical specification is subjected to change without notice

The information contained herein is the exclusive property of SHENZHENG TINAMA Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHENZHENG TINAMA Corporation.



Table of Contents

Table of Contents.....	2
Record of Revision.....	3
1 General Specifications.....	4
2 Input/Output Terminals.....	5
3 Absolute Maximum Ratings.....	6
4 Electrical Characteristics.....	7
5 Timing Chart.....	9
6 Capacitive Touch Panel.....	16
7 Optical Characteristics.....	23
8 Environmental / Reliability Test.....	26
9 Mechanical Drawing.....	27
10 Packing drawing.....	28
11 Precautions for Use of LCD Modules.....	29



**1.General Specifications For TFT**

Feature		Spec
Display Spec.	Size	3.5inch
	Resolution	320(RGB) X 240
	Interface	RGB/CCIR656/601
	Color Depth	16.7M dithering
	Technology type	a-si TFT
	Pixel pitch (mm)	0.219 x 0.219
	Pixel Configuration	R.G.B. Vertical Stripe
	Display Mode	TM with Normally White
	Surface Treatment(Up Polarizer)	Clear type (3H)
	Viewing Direction	12 o'clock
	Gray Scale Inversion Direction	6 o'clock
Mechanical Characteristics	DIM.(mm)	76.90 x 63.90 x 2.80
	Active Area(mm)	70.08 x 52.56
	With /Without TSP	With CTP
	LED Numbers	6 LEDs Serial
Electronic	Driver IC	NT39016D

Note 1: Viewing direction for best image quality is different from TFT definition, there is a 180 degree shift.

Note 2: Requirements on Environmental Protection: RoHS



2. Input/Output Terminals

2.1 The FPC Connection of TFT

Recommend connector: Kyocera elco: 6240 serials

No	Symbol	I/O	Description	Remark
1,2	LED_Cathode	I	LED_Cathode	Note 2-1
3,4	LED_Anode	I	LED_Anode	Note 2-1
5	NC	-	No Connect	
6	RESET	I	Reset	
7	NC	-	No Connect	
8	YU	I	Y_Up	Not used
9	XR	I	X_Right	Not used
10	YD	I	Y_Bottom	Not used
11	XL	I	X_Left	Not used
12	D00	I	Data 00	Note 2-2
13	D01	I	Data 01	Note 2-2
14	D02	I	Data 02	Note 2-2
15	D03	I	Data 03	Note 2-2
16	D04	I	Data 04	Note 2-2
17	D05	I	Data 05	Note 2-2
18	D06	I	Data 06	Note 2-2
19	D07	I	Data 07	Note 2-2
20	D08	I	Data 08	Note 2-2
21	D09	I	Data 09	Note 2-2
22	D10	I	Data 10	Note 2-2
23	D11	I	Data 11	Note 2-2
24	D12	I	Data 12	Note 2-2
25	D13	I	Data 13	Note 2-2
26	D14	I	Data 14	Note 2-2
27	D15	I	Data 15	Note 2-2
28	D16	I	Data 16	Note 2-2
29	D17	I	Data 17	Note 2-2
30	D18	I	Data 18	Note 2-2
31	D19	I	Data 19	Note 2-2
32	D20	I	Data 20	Note 2-2
33	D21	I	Data 21	Note 2-2
34	D22	I	Data 22	Note 2-2
35	D23	I	Data 23	Note 2-2
36	HSYNC	I	Horizontal Synchronous Signal	
37	VSYNC	I	Vertical Synchronous Signal	
38	CLK	I	Data Clock	
39	NC	-	No Connect	
40	NC	-	No Connect	
41	VDD	P	power supply	
42	VDD	P	power supply	
43	SPENA	I	Serial port data enable signal	
44	NC	-	No Connect	
45	NC	-	No Connect	
46	NC	-	No Connect	


The information contained herein is the exclusive property of SHENZHEN TIANMA Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHENZHEN TIANMA Corporation.



47	NC	-	No Connect	
48	NC	-	No Connect	
49	SPCK	I	SPI Serial Clock	
50	SPDA	I/O	SPI Serial Data Input/output	
51	NC	-	No Connect	
52	DEN	I	Data enabling signal	
53	GND	P	Ground	
54	GND	P	Ground	

I: input O: output P: power

Note 2-1: The figure below shows the connection of LED

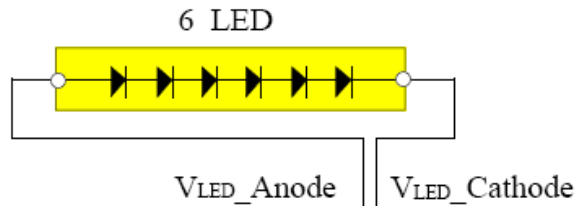

Note 2-2:

Mode	D(23:16)	D(15:8)	D(7:0)	HSYNC	VSYNC	DEN
CCIR 656	D(23:16)	GND	GND	NC	NC	NC
CCIR 601	D(23:16)	GND	GND	HSYNC	VSYNC	NC
8 Bit RGB	D(23:16)	GND	GND	HSYNC	VSYNC	NC for HV mode
						DEN for DEN mode
24 Bit RGB	R(7:0)	G(7:0)	B(7:0)	HSYNC	VSYNC	NC for HV mode
						DEN for DEN mode

3 . ABSOLUTE MAXIMUM RATINGS

Ta = 25℃

Item	Symbol	MIN	MAX	Unit	Remark
Power Supply Voltage	VDD	-0.3	5.0	V	
Back Light Forward Current	I _{LED}		25	mA	One LED
Operating Temperature	T _{OPR}	-20	60	℃	
Storage Temperature	T _{STG}	-30	70	℃	

**4. Electrical Characteristics****4.1. Driving TFT LCD Panel**

GND=0V, Ta=25°C

Item		Symbol	MIN	TYP	MAX	Unit	Remark
Power Supply Voltage		VDD	3.0	3.3	3.6	V	
Input Signal Voltage	Low Level	V _{IL}	0		0.2VCC	V	
	High Level	V _{IH}	0.8VCC		VCC	V	
(Panel+LSI) Power Consumption		Black Mode(60HZ)		35	50	mW	
		Standby Mode		0.1	0.15	mW	

4.2 Driving Backlight


Ta=25°C

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Forward Current	I _F	--	20	25	mA	
Forward Current Voltage	V _F	16.8	19.2	21.6	V	
Backlight Power Consumption	W _{BL}	--	384	--	mW	



Block Diagram

LCM module diagram

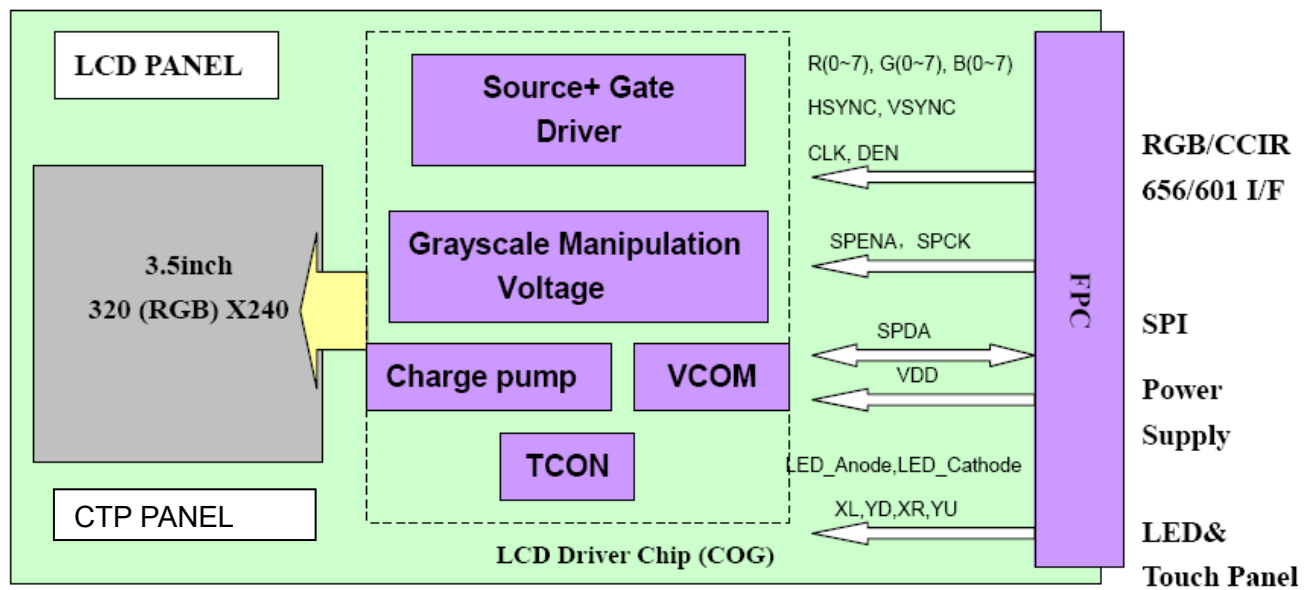




5 Timing Chart

Please refer to NT39016D data sheet for more details.


5.1 AC Electrical Characteristics (VDD=3.3V, GND= 0V, Ta=25°C)

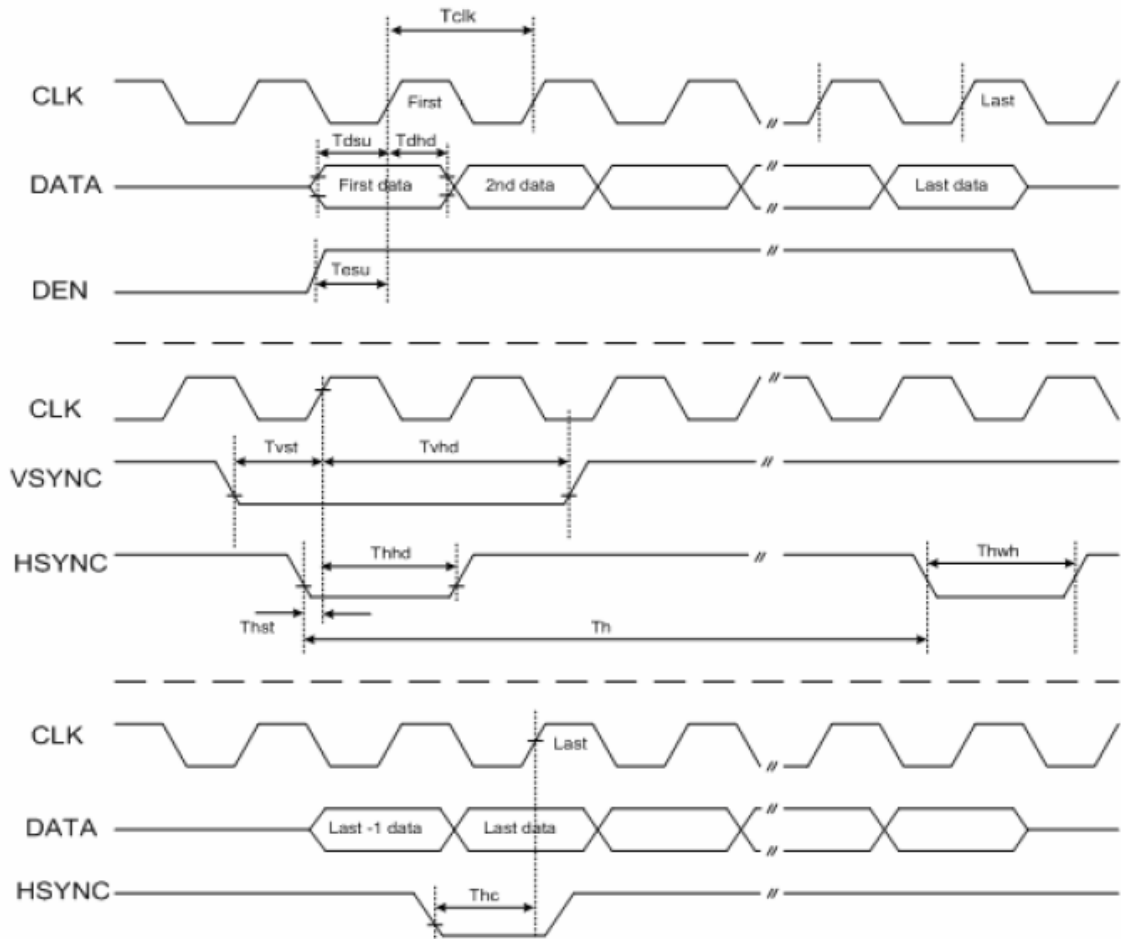



Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
CLK clock time	Tclk	-	-	35.7	ns	CLK=28MHz
CLK pulse duty	Tchw	40	50	60	%	Tclk
HSYNC to CLK	Thc	-	-	1	CLK	
HSYNC width	Thwh	1	-	-	CLK	
VSYNC width	Tvwh	1	-	-	Th	
HSYNC period time	Th	60	63.56	67	us	
VSYNC setup time	Tvst	12	-	-	ns	
VSYNC hold time	Tvhd	12	-	-	ns	
HSYNC setup time	Thst	12	-	-	ns	
HSYNC hold time	Thhd	12	-	-	ns	
Data set-up time	Tdsu	12	-	-	ns	D[23:00] to CLK
Data hold time	Tdhd	12	-	-	ns	D[23:00] to CLK
DEN setup time	Tesu	12	-	-	ns	DEN to CLK


5.2 24 bit RGB mode for 320RGB x 240

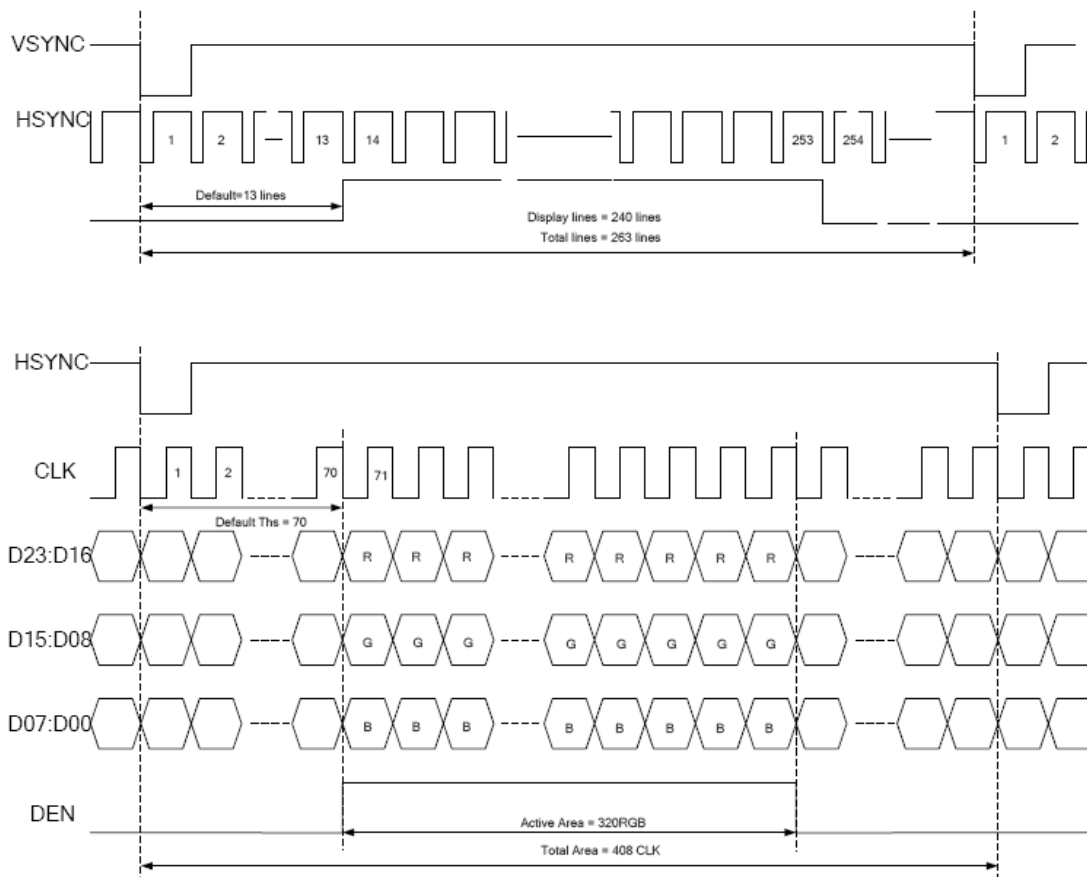




Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
CLK frequency	Fclk	-	6.4	-	MHz	VDD=3.0~3.6V
CLK cycle time	Tclk	-	156	-	ns	
Time that HSYNC to 1'st data input(NTSC)	Ths	40	70	255	CLK	

5.3 8 bit RGB mode for 320RGB x 240

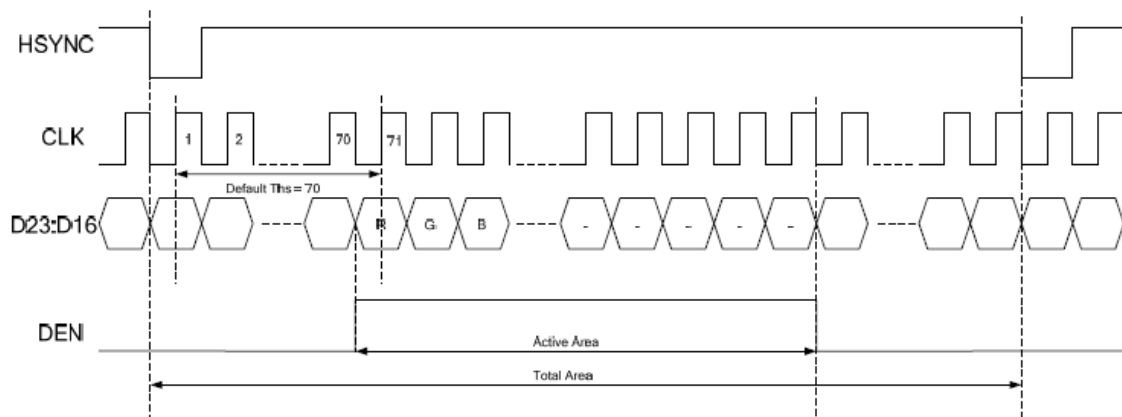

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
CLK frequency	Fclk	-	27	-	MHz	VDD=3.0~3.6V
CLK cycle time	Tclk	-	37	-	ns	
Time that HSYNC to 1'st data input(NTSC)	Ths	35	70	255	CLK	


5.4 ITU-R BT 601

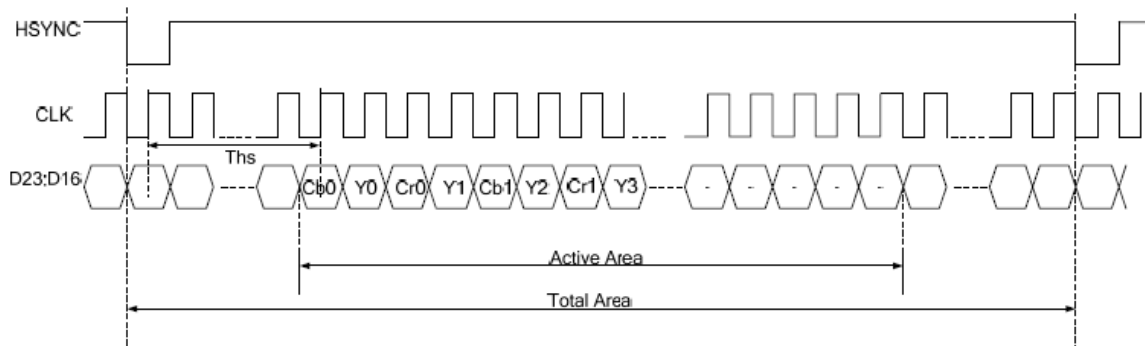




Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
CLK frequency	Fclk	-	24.54/27	-	MHz	VDD=3.0~3.6V
CLK cycle time	Tclk	-	40/37	-	ns	
Time from HSYNC to 1'st data input(PAL)	Ths	128	264	-	CLK	
Time from HSYNC to 1'st data input(NTSC)	Ths	128	244	-	CLK	

5.5 ITU-R BT 656

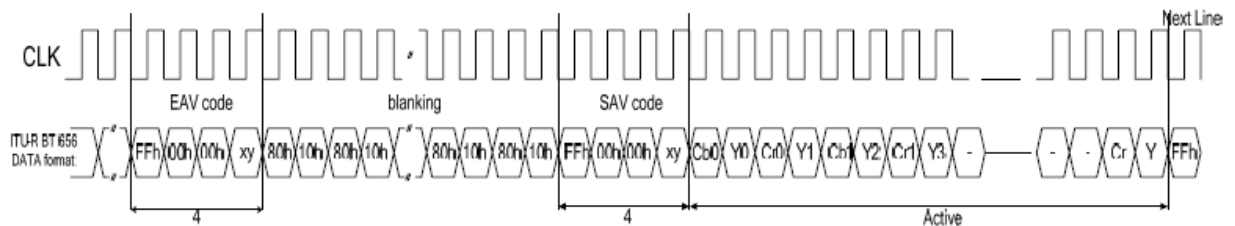

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
CLK frequency	Fclk	-	27	-	MHz	VDD=3.0~3.6V
CLK cycle time	Tclk	-	37	-	ns	
Time from EAV to 1'st data input(PAL)	Ths	128	288	-	CLK	
Time from EAV to 1'st data input (NTSC)	Ths	128	276	-	CLK	

5.6 3-Wire Serial Communication AC Timing

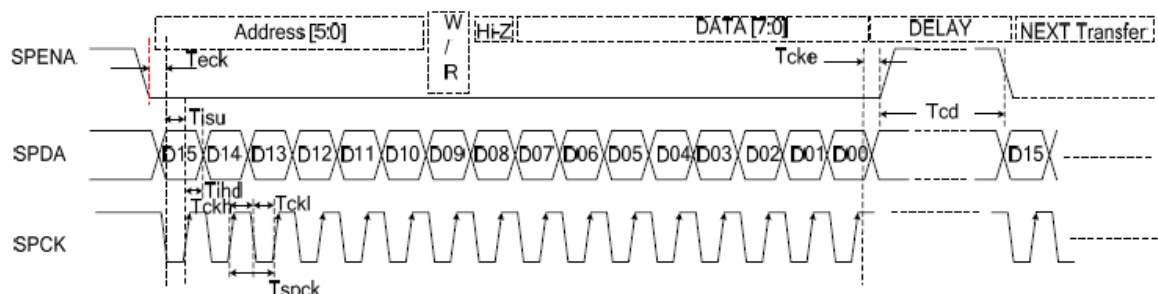



Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
SPCK cycle time	Tspck	320	-	-	ns	
SPCK pulse duty	Tscdut	40	50	60	%	
Serial data setup time	Tisu	120	-	-	ns	
Serial data hold time	Tihd	120	-	-	ns	
Serial clock high/low	Tssw	120	-	-	ns	
Chip select distinguish	Tcd	1	-	-	us	

5.7 3-Wire Control Registers List

3-Wire Register		Register Description		
D[15:10]	Name	Init	R/W	Function Description
000000b	R00	07h	R/W	System control register
000001b	R01	00h	R/W	Timing Controller function register
000010b	R02	03h	R/W	Operation control register
000011b	R03	CCh	R/W	Input data Format control register
000100b	R04	46h	R/W	Source Timing delay control register
000101b	R05	0Dh	R/W	Gate Timing delay control register
000110b	R06	00h	R/W	Reserved
000111b	R07	00h	R/W	Internal function control register
001000b	R08	08h	R/W	RGB Contrast control register
001001b	R09	40h	R/W	RGB Brightness control register
001010b	R0A	88h	R/W	Hue / Saturation control register
001011b	R0B	88h	R/W	R / B Sub-Contrast control register
001100b	R0C	20h	R/W	R Sub-Brightness control register
001101b	R0D	20h	R/W	B Sub-Brightness control register
001110b	R0E	10h	R/W	VCOMDC Level control register
001111b	R0F	A4h	R/W	VCOMAC Level control register
010000b	R10	04h	R/W	VGAM2 Level control register
010001b	R11	24h	R/W	VGAM3/4 Level control register
010010b	R12	24h	R/W	VGAM5/6 Level control register
011110b	R1E	00h	R/W	Reserved
100000b	R20	00h	R/W	Wide and narrow display mode control register



Note 5-1:

R03: c4h:ITU-R BT 656 Mode

c2h:ITU-R BT 601 Mode


c8h:8 bit RGB Mode(HV Mode)

c9h:8 bit RGB Mode(DE Mode)

cch(default):24 bit RGB Mode (HV mode)

cdh:24 bit RGB Mode (DE mode)

5.8 Power on/off sequence

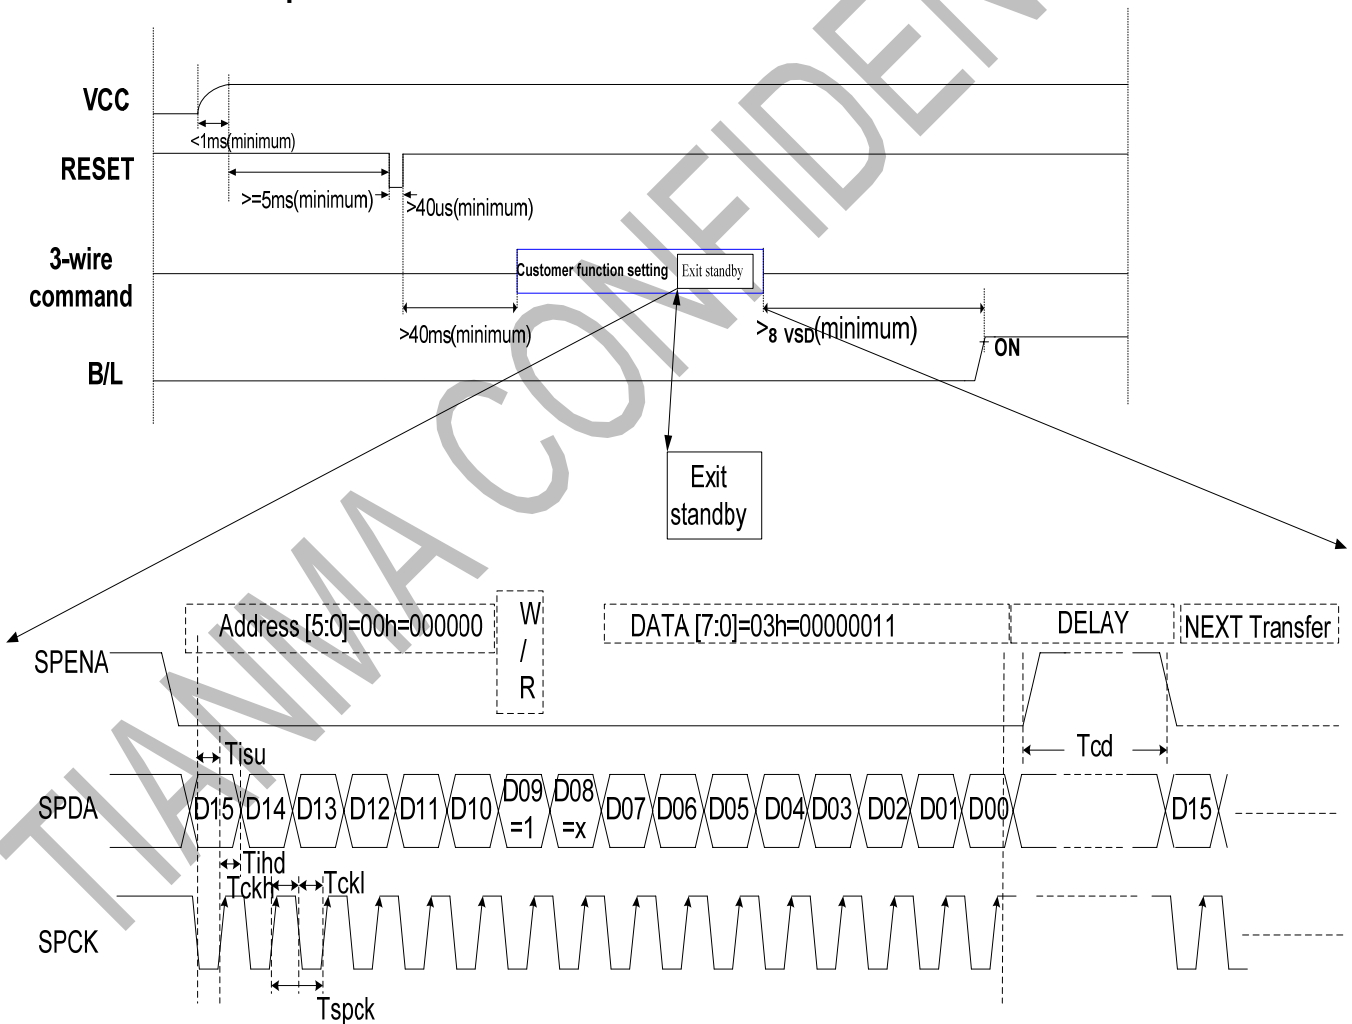



Note


1. Please exit to Standby Mode through 3-wire command, detail sequence that exit to Standby Mode under power on mode presentation as below.

2.Exit to standby mode, you can write data "0x03" to register "R00", D09=1 for writing data to register. D09=0 for reading data from register.

Under SPI write mode,D08=X , and 'X' means don't care D08='1' or '0'.

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Serial Clock	Tspck	320	-	-	ns	
SPCK Pulse Duty	Tscdut	40	50	60	%	
Serial Data Setup Time	Tisu	120	-	-	ns	
Serial Data Hold Time	Tihd	120	-	-	ns	
Serial Clock High/Low	Tssw	120	-	-	ns	Tckh or Tckl
Chip Select Distinguish	Tcd	1	-	-	us	

Power off Sequence

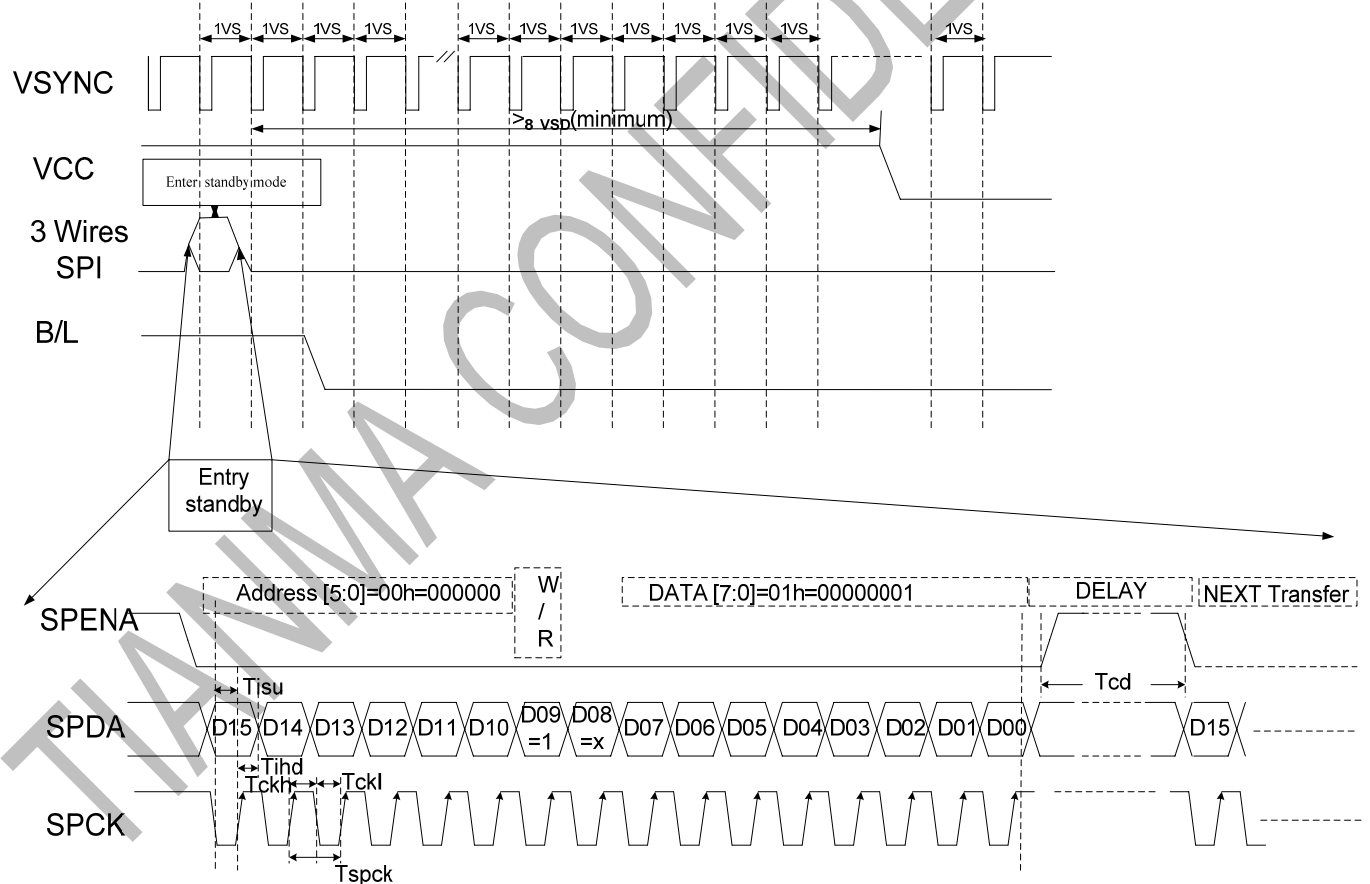

Note

1. 1VS=1VSYNC. Please entry Standby Mode through 3-wire command, detail sequence which enter

Standby Mode under power off mode presentation as below.

2. Enter to standby mode, you can write data "0x01" to register "R00", D09=1 for writing data to

The information contained herein is the exclusive property of SHENZHEN TINAMA Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHENZHEN TINAMA Corporation.



register. D09=0 for reading data from register.

Under SPI write mode, D08=X, and 'X' means don't care D08='1' or '0'.

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Serial clock	Tspck	320	-	-	ns	
SPCK pulse duty	Tscdut	40	50	60	%	
Serial data setup time	Tisu	120	-	-	ns	
Serial data hold time	Tihd	120	-	-	ns	
Serial clock high/low	Tssw	120	-	-	ns	Tckh or Tckl
Chip select distinguish	Tcd	1	-	-	us	

6.Capacitive Touch Panel (CTP)

6.1 General Specification For CTP

Item	Contents	Unit	Note
Product Size	3.5	inch	--
Sensing Area	72.88 (W)×55.36(H)	mm	--
Sensor Glass Size	76.9(W) × 63.9(H)	mm	--
Sensor Glass Thickness	0.4	mm	--
Viewing Area(Cover Lens)	71.88(W)×54.36(H)	mm	--
Outer Dimension	79.9(W)×68.9(H)×4.37(D)	mm	--
Control IC	HX8526-D32	--	--
Resolution	320×240	--	2
Interface	I2C	--	1

Note 1: It can be compatible with Andriod System.

Note 2: TP resolution match the resolution of the LCD. Resolution is normally expressed in bits.

For example, a resolution of 10bits, the TP can be reported coordinates of the range (0,0) - (1023,1023).And to transverse the 102.3mm size structure in TP as an example,then an average of 1mm is 10 pixels.



6.2 Structure description

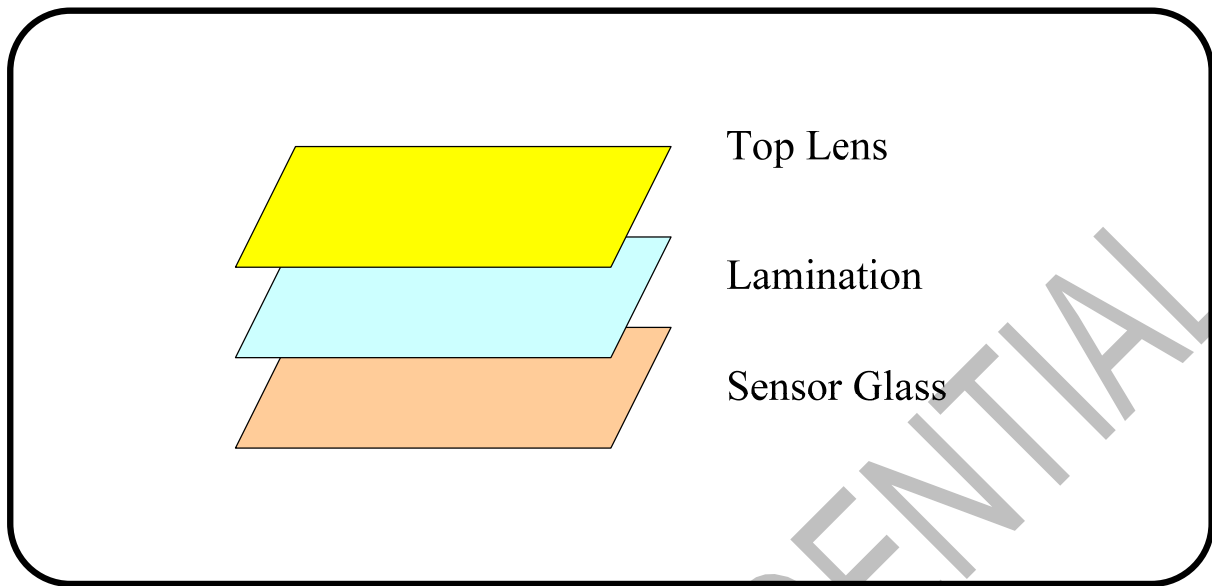


Fig3. Structure of touch lens

6.3 Hardware interface block diagram

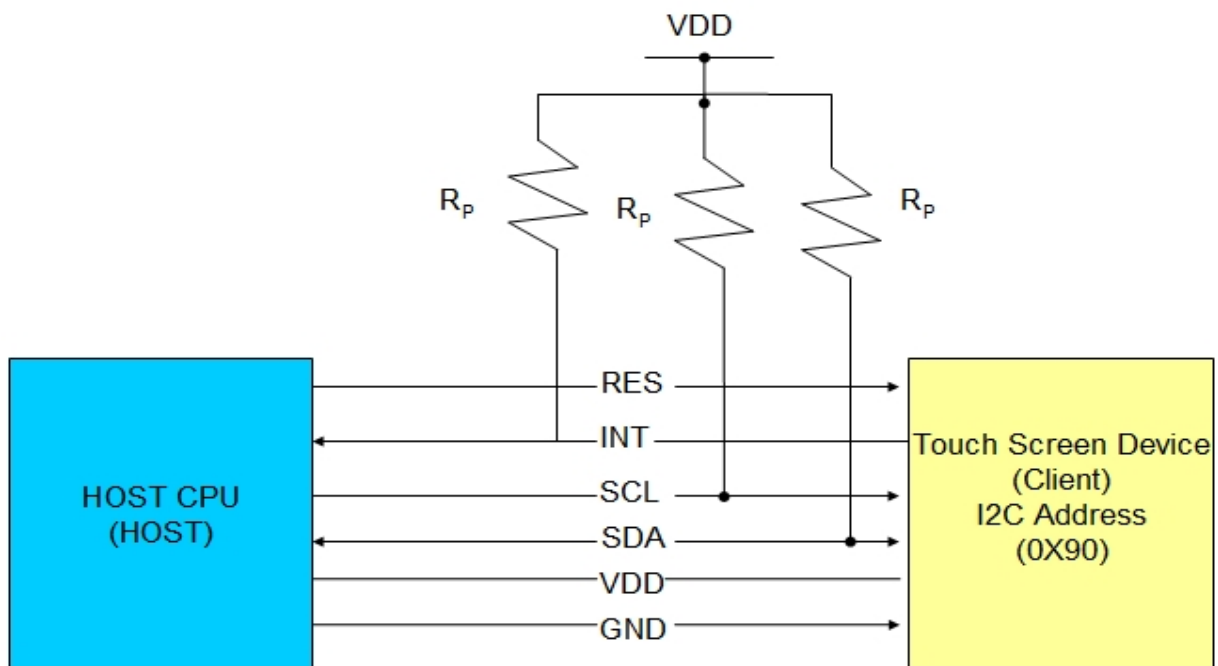


Fig 4 .Reference environment configuration

Note : Customers use can make changes based on specific application for the pull-up resistors.



6.4 power specification

(T_A= 25°C, VDD=3.3V)

Item	Min	Typ	Max	Unit	Note
Power Supply Voltage	2.7	--	3.5	V	--
Active Mode	--	--	15	mA	Note 1
Sleep Mode	--	--	30	uA	--
Respond Time	--	--	30	ms	Note 2

Note 1: When it is 120Hz report rate & 5 point touch.

Note 2: When first finger touch on the TP, it is the time that TP report interruption to host from idle mode.

Note 3: All above current can be changed to meet the need of customers.

6.5 The FPC Connection of CTP

Pin No.	Symbol	Description	Remark
1	VDD	CTP power supply	--
2	GND	Ground	--
3	IIC RESET	Interrupt line, active low	--
4	SCL	I2C clock input	Note 1
5	SDA	I2C data input and output	Note 1
6	Global RESET	Reset pin, active low	--

Note 1: On SDA and SCL there be pull-up resistors.



6.6 Interface Timing Chart

Note: Please refer to **HX8526-D32** data sheet for more details.

HX8526-D32 supports the **I2C** interfaces, which can be used by a host processor or other devices. The **I2C** is always configured in the Slave mode. The data transfer format is shown in Fig 5

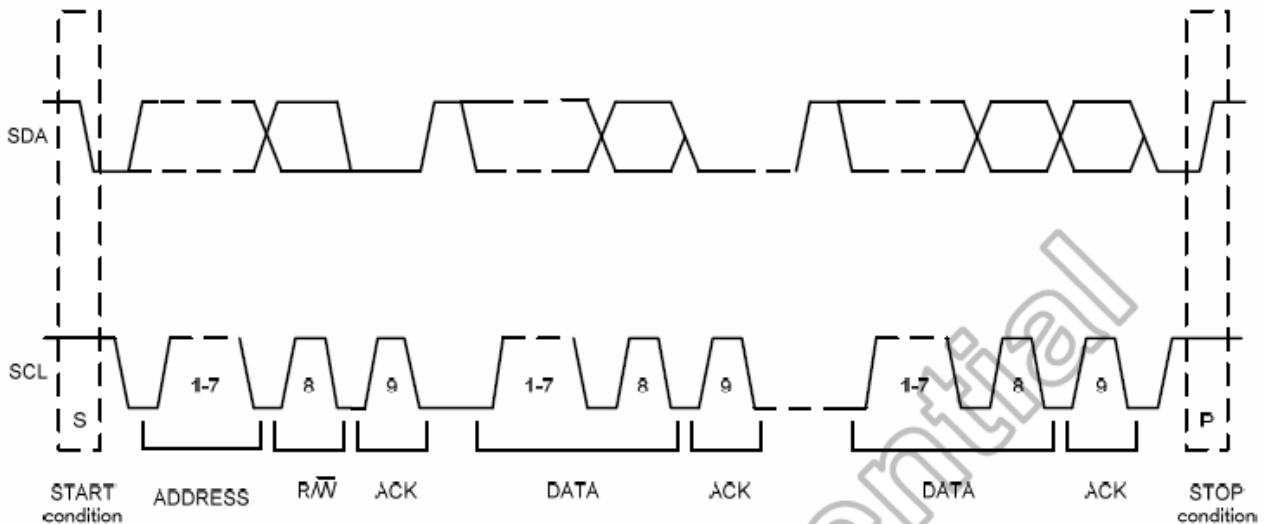


Fig 5 . I2C serial data transfer format

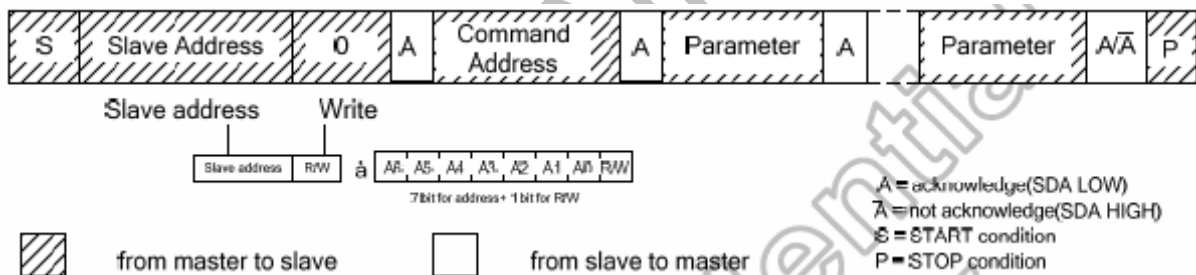


Fig 6 . Data format of writing mode

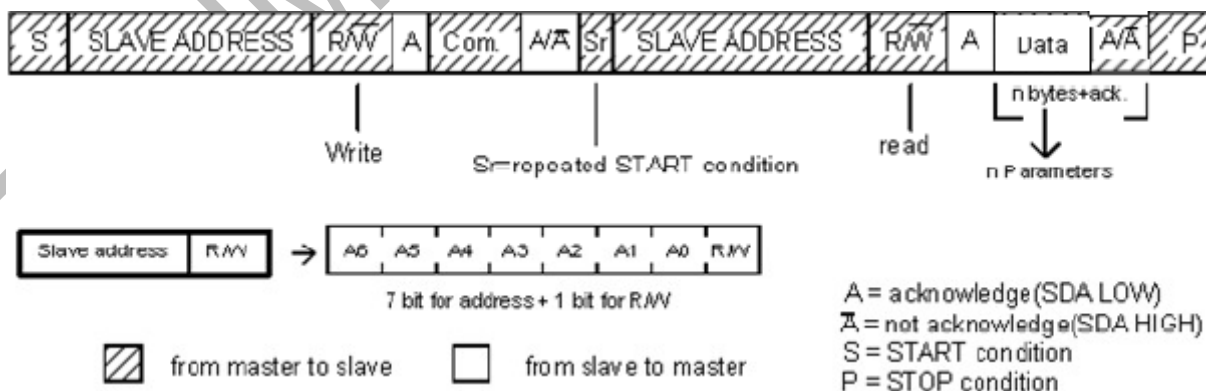


Fig 7 . Data format of reading mode



COMMAND LIST(HX8526-D32)

Standard command

(Hex)	Operation Code	D7	D6	D5	D4	D3	D2	D1	D0	Function
0	No operation	0	0	0	0	0	0	0	0	-
80	Sleep IN	1	0	0	0	0	0	0	0	-
81	Sleep Out	1	0	0	0	0	0	0	1	-
82	Sense Off	1	0	0	0	0	0	1	0	-
83	Sense On	1	0	0	0	0	0	1	1	-
85	Read Event	1	0	0	0	0	1	0	1	-
	1st parameter	B31	B30	B29	B28	B27	B26	B25	B24	-
	2nd parameter	B23	B22	B21	B20	B19	B18	B17	B16	-
	3rd parameter	B15	B14	B13	B12	B11	B10	B9	B8	-
	4th parameter	B7	B6	B5	B4	B3	B2	B1	B0	-
86	Read All Events	1	0	0	0	0	1	1	0	-
	1st parameter	B31	B30	B29	B28	B27	B26	B25	B24	-
	2nd parameter	B23	B22	B21	B20	B19	B18	B17	B16	-
	3rd parameter	B15	B14	B13	B12	B11	B10	B9	B8	-
	4th parameter	B7	B6	B5	B4	B3	B2	B1	B0	-
	5th parameter	E3	E2	E1	E0	F1	P2	P1	P0	-
	6th parameter	B23	B22	B21	B20	B19	B18	B17	B16	-
	:	:	:	:	:	:	:	:	:	-
	(n+1)th parameter	B7	B6	B5	B4	B3	B2	B1	B0	-
	Read Latest Event	1	0	0	0	0	1	1	1	-
87	1st parameter	B31	B30	B29	B28	B27	B26	B25	B24	-
	2nd parameter	B23	B22	B21	B20	B19	B18	B17	B16	-
	3rd parameter	B15	B14	B13	B12	B11	B10	B9	B8	-
	4th parameter	B7	B6	B5	B4	B3	B2	B1	B0	-
88	Clear Stack	1	0	0	0	1	0	0	0	-

User define command list table

CMD (Hex)	Operation Code	D7	D6	D5	D4	D3	D2	D1	D0	Function	
31h	Device ID	0	0	1	1	0	0	0	1	Response Device ID Code	
	1st parameter	85									-
	2nd parameter	26									-
	3rd parameter	00									-
32h	Version ID	0	0	1	1	0	0	0	1	Read Firmware version	
	1st parameter	SF_Version[7:0]				F_Version[7:0]					-
42h	SETFLASHTEST	1	0	0	0	0	0	1	0	-	
	1st parameter	-	-	-	-	-	-	RELOAD_DISABLE(0)	FLASHTEST(0)	-	
43h	SETFLASHEN	1									0
	1st parameter	-	-	-	-	TRIM_AUTO	MASS_E_EN(0)	TRIM_W_EN(0)	FLASHCHEN(0)	-	
	2nd parameter	MERASE(0)	SERASE(0)	PERASE(0)	PROG(0)	WRONLY(0)	ALE(0)	SAVEN(0)	CE(0)	-	
	3rd parameter	-	-	TM[3:0](0000)				POR(0)	INF(0)	-	
44h	SETFLASHADDR	1									0
	1st parameter	A[6:0](7'b00000000)									-
	2nd parameter	A[11:7](5'b00000000)									-
45h	SETFLASHDATA	A[13:12](2b00)									-
	1st parameter	-									0
46h	FLASHR	DI[7:0](00000000)									-
47h	FLASHWSTART	1	0	0	0	0	1	1	0	FLASHR	
48h	FLASHPW	1	0	0	0	0	1	1	1	FLASHWSTART	
49h	FLASHPWEND	1	0	0	0	0	1	0	0	FLASHPW	
4Ah	FLASHBPWSTART	1	0	0	0	1	0	0	1	FLASHPWEND	
4Bh	FLASHBPW	1	0	0	0	1	0	1	0	FLASHBPWSTART	
4Ch	FLASHBPWEND	1	0	0	0	1	0	1	1	FLASHBPW	
4Dh	FLASHPE	1	0	0	0	0	1	0	0	FLASHBPWEND	
4Eh	FLASHSE	1	0	0	0	0	1	0	1	FLASHPE	
4Fh	FLASHME	1	0	0	0	0	1	1	0	FLASHSE	



6.7 CTP Reliability

6.7.1 Mechanical test

No.	Item	Requirement	Verification method
1	Surface Hardness	$\geq 6H$	JIS-K5600
2	Falling-ball Impact Test	No crack/scratch allowed after test	Use the 64g steel ($\Phi 25$) ball is dropped on the Glass surface from 70cm height at 1time(Glass side)
3	Surface Pressure Test	No crack/scratch allowed after test	15 Kgf pressure in the center of the display using a rubber test head with a diameter of 15mm, 1 time, 1 minute, non-operation
4	Terminal Pull Test	No visible and functional disturbances allowed after test	$\pm 90^\circ$ direction, weight: 500g, non-operation

6.7.2 Electrical test($T_a=25^\circ\text{C}$, $V_{DD}=3.3\text{V}$)

No.	Item	Specification	NOTE
1	Linearity	$\pm 1.5\text{ mm}$ (Center Area)	$\pm 2\text{mm}$ (Border Area)
2	Veracity	$\pm 1.5\text{ mm}$ (Center Area)	$\pm 2\text{mm}$ (Border Area)
3	ESD	No visible and functional disturbances allowed after test	1: Human body Model: 2KV 2: Machine Model: 200V.
4	Sensitivity	No disconnection	The diameter of test probes > Sensor Pitch (Note 1)

Note 1: Written using different diameter drawing a line on the touch screen to view the painting line whether there is a disconnection.



7. Optical Characteristics

Ta=25℃

Item		Symbol	Condition	Min	Typ	Max	Unit	Remark
View Angles		θT	CR ≥ 10	50	TBD	-	Degree	Note 2
		θB		60	TBD	-		
		θL		60	TBD	-		
		θR		60	TBD	-		
Contrast Ratio		CR	θ=0°	350	450	-		Note1 Note3
Response Time		T _{ON}	25℃	-	25	-	ms	Note1 Note4
		T _{OFF}						
Chromaticity	White	x	Backlight is on		TBD			Note1 Note5
		y			TBD			
	Red	x		-	TBD	-		
		y		-	TBD	-		
	Green	x		-	TBD	-		
		y		-	TBD	-		
	Blue	x		-	TBD	-		
		y		-	TBD	-		
Uniformity		U		-	75	-	%	Note1 Note6
NTSC				-	TBD	-	%	Note 5
Luminance		L		-	TBD	-	cd/m²	Note1 Note7


Test Conditions:

1. VDD=3.3V, $I_L=20\text{mA}$ (Backlight current), the ambient temperature is 25℃.
2. The test systems refer to Note 1 and Note 2.



Note 1: Definition of optical measurement system.


The optical characteristics should be measured in dark room. After 5 Minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

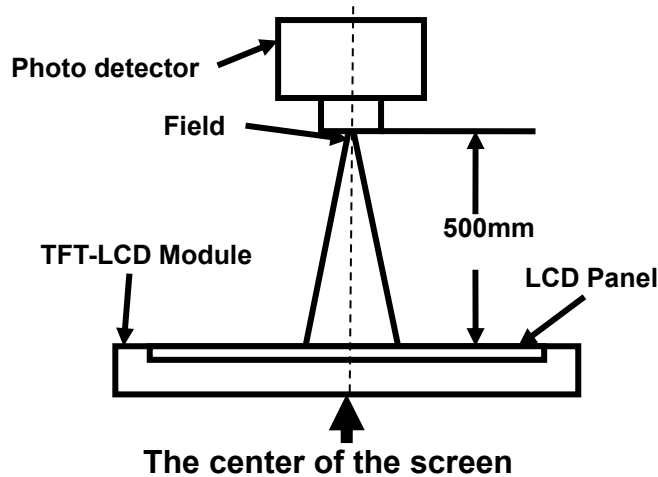

Item	Photo detector	Field
Contrast Ratio	SR-3A	1°
Luminance		
Chromaticity		
Lum Uniformity		
Response Time	BM-7A	2°

Note 2: Definition of viewing angle range and measurement system.

viewing angle is measured at the center point of the LCD by CONOSCOPE(ergo-80).

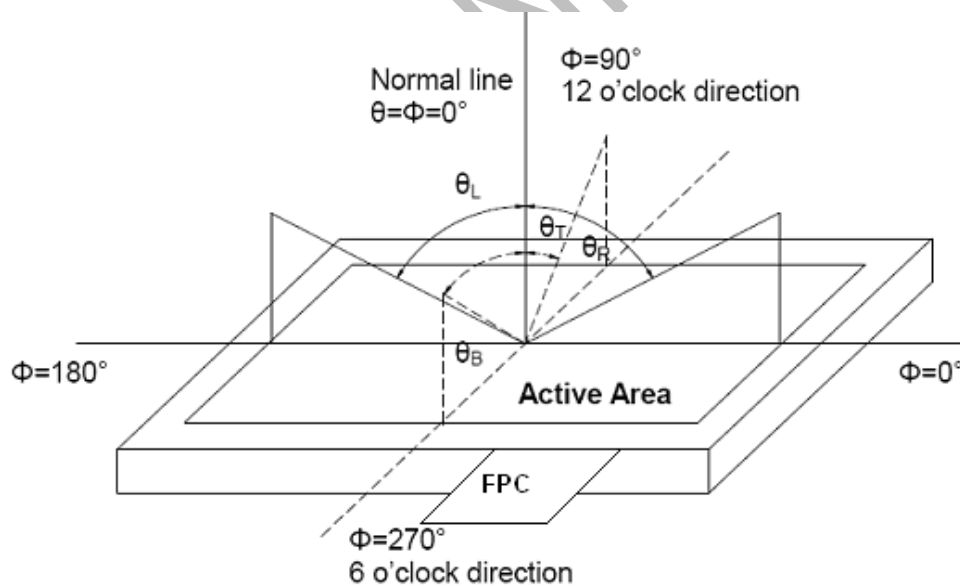

Note 3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$

"White state ": The state is that the LCD should drive by Vwhite.

"Black state": The state is that the LCD should drive by Vblack.


Vwhite: To be determined Vblack: To be determined.

The information contained herein is the exclusive property of SHENZHEN TINAMA Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHENZHEN TINAMA Corporation.



Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (T_{ON}) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_{OFF}) is the time between photo detector output intensity changed from 10% to 90%.

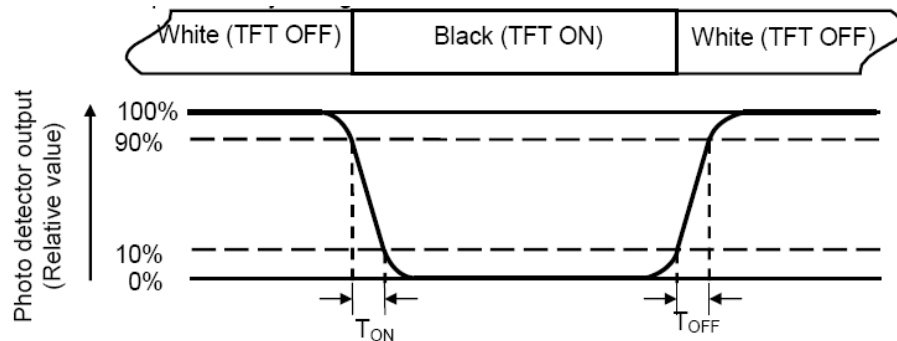

Note 5: Definition of color chromaticity (CIE1931)


Color coordinates measured at center point of LCD.

Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity (U)} = L_{\min} / L_{\max}$$

L-----Active area length W----- Active area width

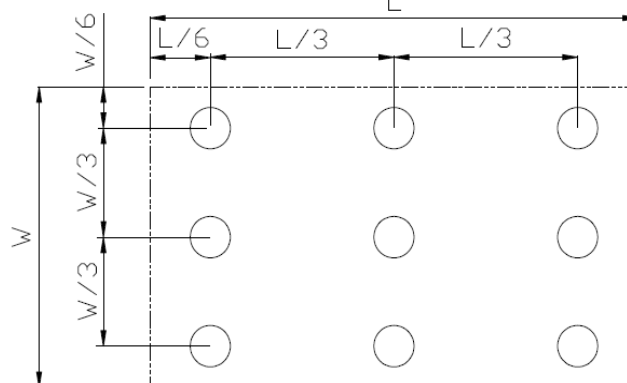

L_{\max} : The measured Maximum luminance of all measurement position.

L_{\min} : The measured Minimum luminance of all measurement position.

Note 7: Definition of Luminance:

Measure the luminance of white state at center point.



8.Environmental / Reliability Test


No	Test Item	Condition	Remarks
1	High Temperature Operation	Ts=+60℃, 240hrs	Note1 IEC60068-2-2,GB2423.2—89
2	Low Temperature Operation	Ta=-20℃, 240hrs	Note 2, IEC60068-2-1 GB2423.1—89
3	High Temperature Storage	Ta=+70℃, 240hrs	IEC60068-2-2, GB2423.2—89
4	Low Temperature Storage	Ta=-30℃, 240hrs	IEC60068-2-1 GB2423.1—89
5	High Temperature & High Humidity (Non-Operation)	+60℃, 90% RH max,240 hours	IEC60068-2-3, GB/T2423.3—2006
6	Thermal Shock (non-operation)	-30℃ 30 min~+70℃ 30 min, Change time:5min, 30 Cycle	Start with cold temperature, end with high temperature IEC60068-2-14,GB2423.22—87
7	Electro Static Discharge (operation)	C=150pF, R=330Ω, 5points/panel Air:±8KV, 5times;Contact:±4KV, 5 times; (Environment: 15℃~35℃, 30%~60%, 86Kpa~106Kpa)	IEC61000-4-2 GB/T17626.2—1998
8	Vibration (non-operation)	Frequency range:10~55Hz, Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z.(package condition)	IEC60068-2-6 GB/T2423.10—1995
9	Shock (non-operation)	60G 6ms, ±X,±Y,±Z 3times for each direction	IEC60068-2-27 GB/T2423.5—1995
10	Package Drop Test	Height:80 cm, 1 corner, 3 edges, 6 surfaces	IEC60068-2-32 GB/T2423.8—1995

Note1: Ts is the temperature of panel's surface.

Note2: Ta is the ambient temperature of sample.




9. Mechanical Drawing

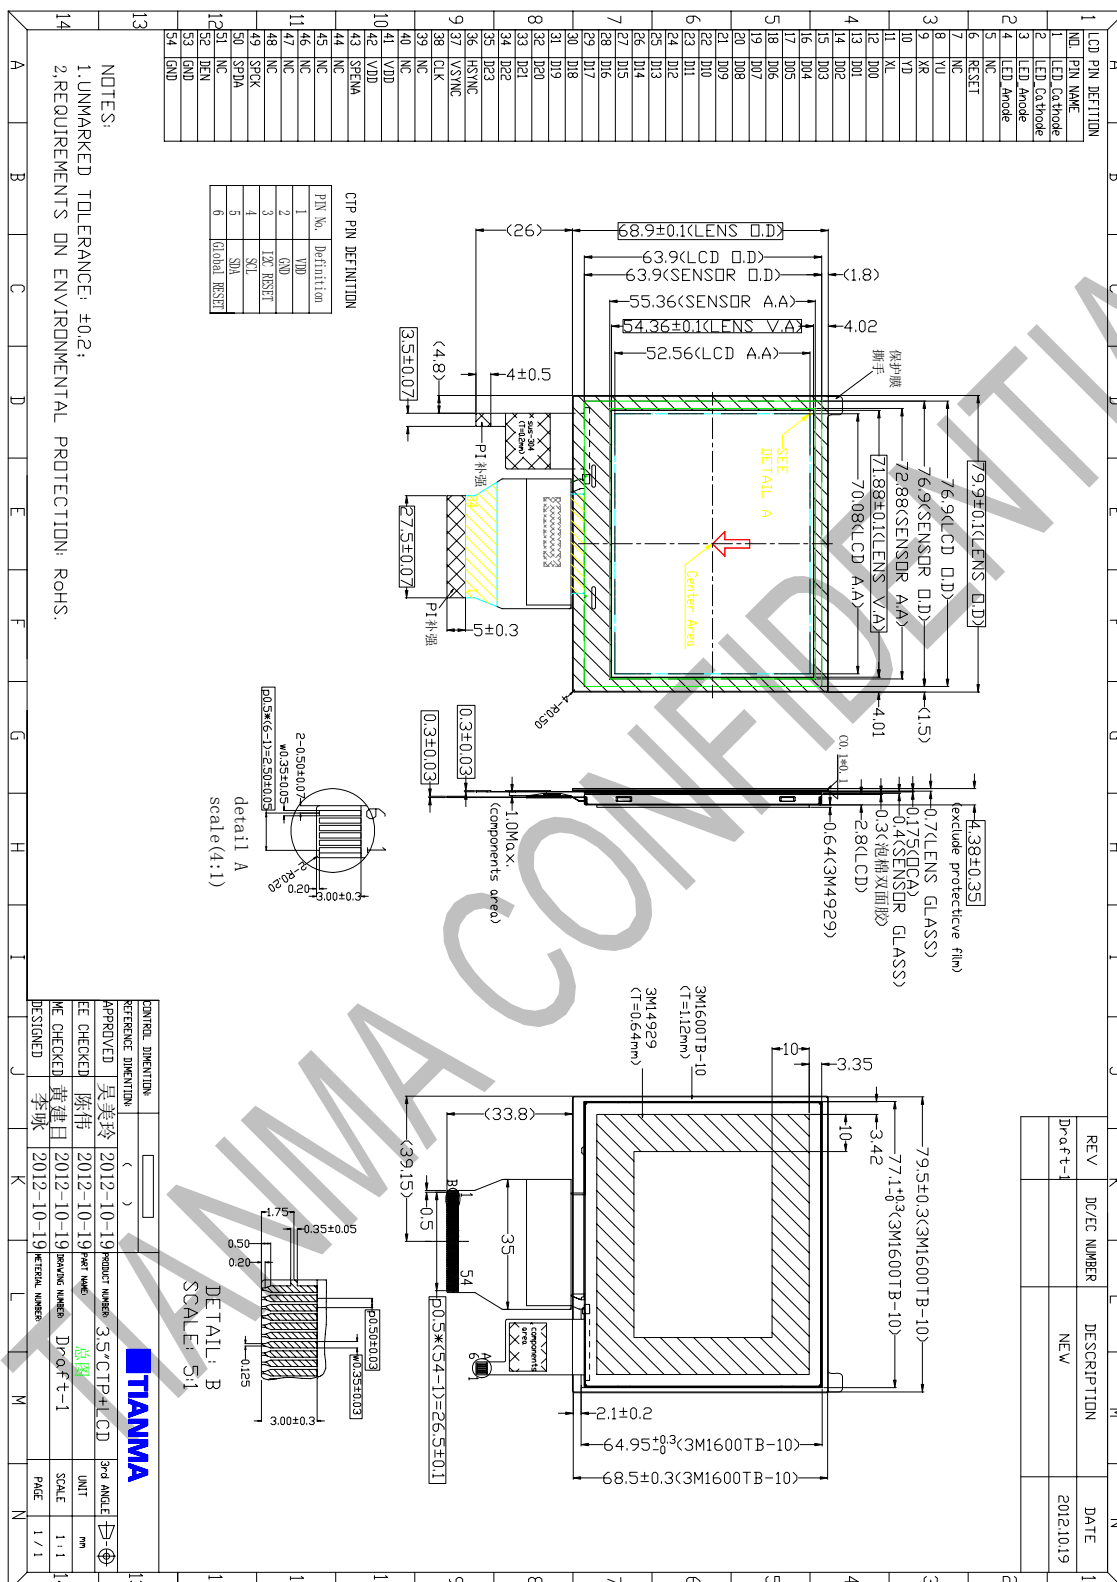



10. Packing drawing

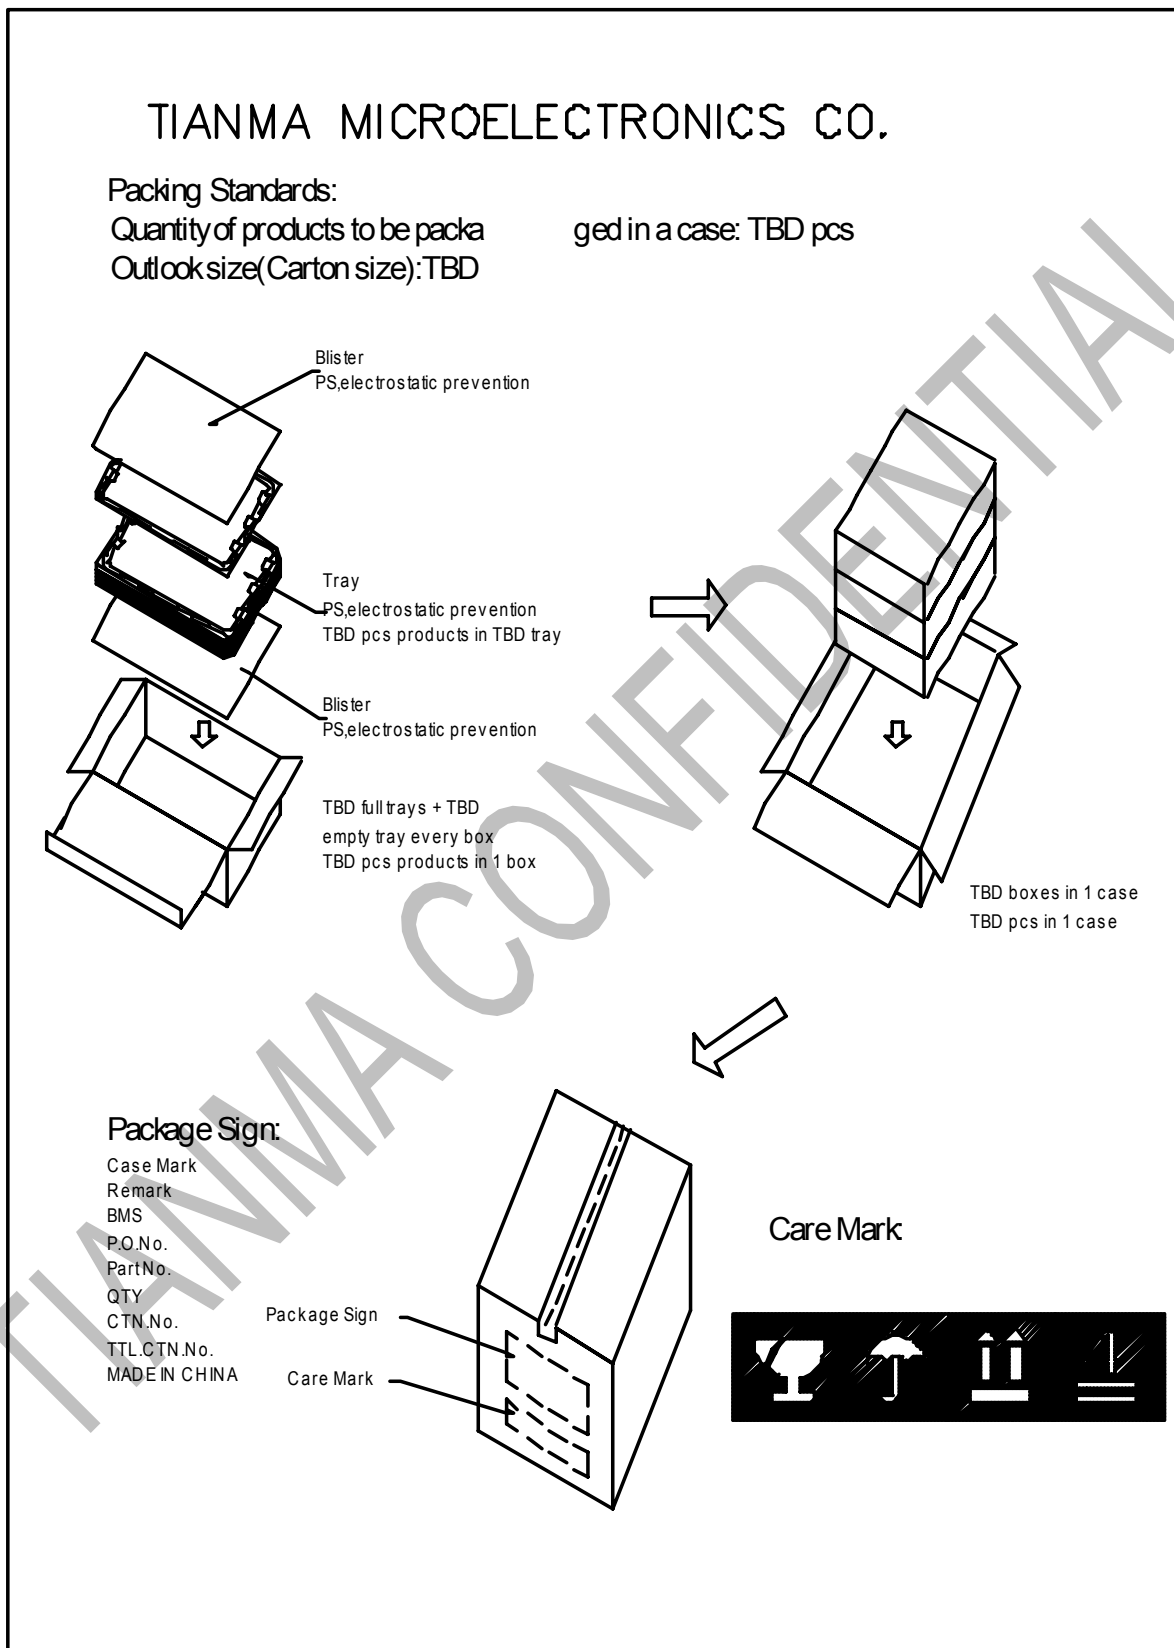



11. Precautions for Use of LCD Modules

11.1 Handling Precautions

11.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

11.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

11.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

11.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

11.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents

11.1.6 Do not attempt to disassemble the LCD Module.

11.1.7 If the logic circuit power is off, do not apply the input signals.

11.1.8 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

11.1.8.1 Be sure to ground the body when handling the LCD Modules.

11.1.8.2 Tools required for assembly, such as soldering irons, must be properly ground.

11.1.8.3 To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

11.1.8.4 The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

11.2 Storage precautions

11.2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

11.2.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature : 0℃ ~ 40℃ Relatively humidity: ≤80%

11.2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.

11.3 Transportation Precautions

11.3.1 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.