



**MODEL NO. : TS056KAAAD01-01**

**ISSUED DATE: 2008-05-20**

**VERSION : Ver 1.0**

- Preliminary Specification
- Final Product Specification

Customer : \_\_\_\_\_

Approved by	Notes

SHANGHAI TIANMA Confirmed :

This technical specification is subjected to change without notice

The information contained herein is the exclusive property of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation.



## Table of Contents

Coversheet.....	1
Table of Contents .....	2
Record of Revision.....	3
1 General specifications.....	4
2 Input/Output terminals.....	5
3 Absolute maximum ratings.....	7
4 Electrical characteristics.....	8
5 Timing chart .....	10
6 Optical characteristics .....	15
7 Environmental / Reliability tests .....	19
8 Mechanical drawing .....	20
9 Packing drawing.....	21
10 Precautions for use of LCD modules.....	23





## 1 General specifications

Feature		Spec
<b>Display Spec.</b>	Size	5.6 inch
	Resolution	320(RGB) X 234
	Interface	Analog RGB
	Color Depth	Full color
	Technology type	a-si TFT
	Pixel pitch (mm)	0.118*0.362
	Pixel Configuration	R.G.B. Vertical Stripe
	Display Mode	TM with Normally White
	Surface Treatment(Up Polarizer)	Anti-Glare
	Viewing Direction	12 o'clock
	Gray Scale Inversion Direction	6 o'clock
<b>Mechanical Characteristics</b>	DIM. LCM (W x H x D) (mm)	126.5*100.0*5.7
	Active Area(mm)	113.28*84.708
	With /Without TSP	Without TSP
	Weight (gram)	123g

Note 1 : Viewing direction for best image quality is different from TFT definition, there is a 180 degree shift.

Note 2 : Requirements on Environmental Protection: RoHS



## 2 Input/Output terminals

### 2.1 TFT LCD panel driving section

No	Symbol	I/O	Description	Remark
1	GND	P	Ground	
2	VCC	P	Supply voltage for scan driver	
3	VGL	P	Negative power for scan driver	
4	VGH	P	Positive power for scan driver	
5	STVD	I/O	Vertical start pulse down side	Note 1
6	STVU	I/O	Vertical start pulse up side	Note 1
7	CKV	I	Shift clock input	
8	U/D	I	UP/DOWN scan control input	Note 1
9	OEV	I	Output enable control for scan	
10	VCOM	I	Common electrode driving signal	
11	VCOM	I	Common electrode driving signal	
12	L/R	I	LEFT/RIGHT scan control input	Note 1
13	MOD	I	Sequential sampling and simultaneous sampling setting	Note 2
14	OEH	I	Output enable control for data driver	
15	STHL	I/O	Start pulse for horizontal scan line left side	Note 1
16	STHR	I/O	Start pulse for horizontal scan line right side	Note 1
17	CPH3	I	Sampling and shifting clock pulse for data driver	Note 2
18	CPH2	I	Sampling and shifting clock pulse for data driver	Note 2
19	CPH1	I	Sampling and shifting clock pulse for data driver	Note 2
20	VCC	P	Supply voltage for data driver	
21	GND	P	Ground	
22	VR	I	Alternated video signal(Red)	
23	VG	I	Alternated video signal(Green)	
24	VB	I	Alternated video signal(Blue)	
25	AVDD	P	Supply voltage for analog circuit	
26	AVSS	P	Ground for analog circuit	


Table 2.1 input terminal pin assignment

P: Power/GND; I: input pin; I/O: input/output pin;

Note 1: select of scanning mode

Setting of scan control input		In/out state for start pulse				Scanning direction
U/D	L/R	STVD	STVU	STHR	STHL	
GND	VCC	0	1	0	1	Up to down, left to right
VCC	GND	1	0	1	0	Down to up, right to left
GND	GND	0	1	1	0	Up to down, right to left
VCC	VCC	1	0	0	1	Down to up, left to right

Refer to the figure as below

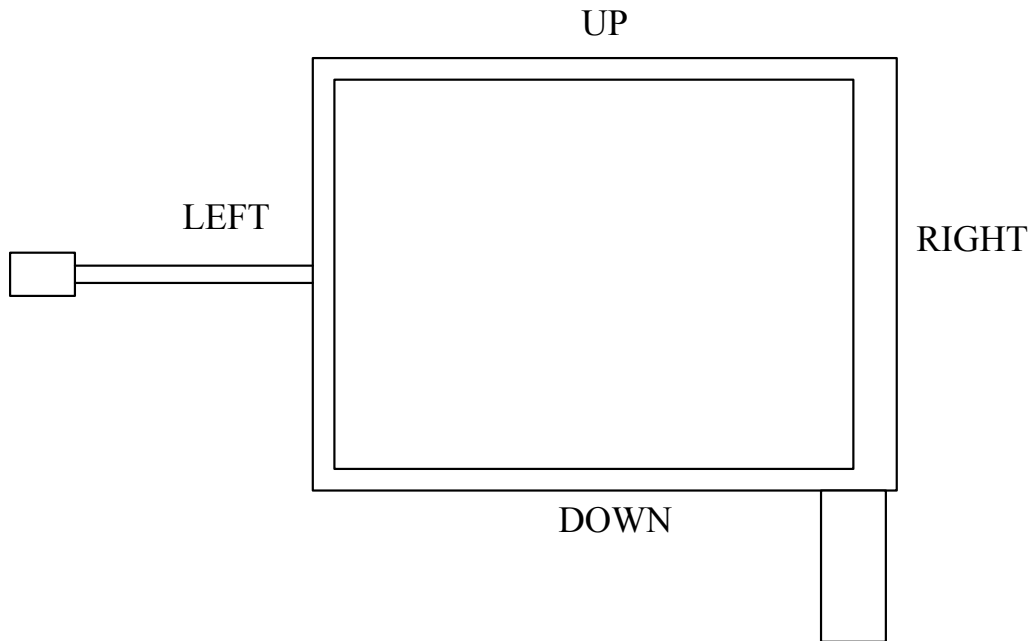

Note 2: MOD=H, simultaneous sampling.  
MOD=L, sequential sampling.  
Please set CPH2 and CPH3 to GND when MOD=H.

## 2.2 Backlight unit section

Pin No.	Symbol	I/O	Function	Remark
1	HI	P	Power supply for backlight unit	
2	GND	P	Ground for backlight unit	



### 3 Absolute maximum ratings

GND=0V, Ta = 25°C

Item	Symbol	MIN	MAX	Unit	Remark
Power Voltage	VCC	-0.3	7.0	V	
	AVDD	-0.3	7.0	V	
	VGH	-0.3	18.0	V	
	VGL	-15.0	0.3	V	
	VGH-VGL	-	33.0	V	
Input signal voltage	V <sub>I</sub>	-0.2	AVDD+0.2	V	Note 1
	V <sub>L</sub>	-0.3	AVDD+0.3	V	Note 2
Operating Temperature	Top	-20	70	°C	
Storage Temperature	Tst	-30	80	°C	

Table 3.1 absolute maximum rating

Note 1: VR, VG, VB

Note 2: STHL, STHR, OEH, L/R, CPH1-3, STVU, STVD, OEV, CKV, U/D



## 4 Electrical characteristics

### 4.1 LCD module

GND=0V, Ta=25°C

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Logic supply voltage	VCC	4.8	5.0	5.2	V	
Analog supply voltage	AVDD	4.8	5.0	5.2	V	
Negative power for scan driver	VGL	-10.5	-10.0	-9.5	V	
Positive power for scan driver	VGH	14.3	15.0	15.7	V	
Input Signal Voltage	Low Level	VIL	0	-	0.3VCC	Note 1
	High Level	VIH	0.7VCC	-	VCC	
Video Signal Amplitude	V <sub>IA</sub>	0.2	-	AVDD-0.2	V	
	V <sub>IAC</sub>	-	3.5	-	V	
	V <sub>IDC</sub>	-	AVDD/2	-	V	
VCOM	V <sub>CAC</sub>	-	5.4	-	V	
	V <sub>CDC</sub>	1.55	-	1.95	V	
Power Consumption	I <sub>VCC</sub>	-	0.80	1.0	mA	
	I <sub>AVDD</sub>	-	3.41	3.5	mA	
	I <sub>VGH</sub>	-	0.056	0.059	mA	
	I <sub>VGL</sub>	-	0.056	0.059	mA	

Table 4.1 LCD module electrical characteristics

Note 1: STHL, STHR, OEH, L/R, CPH1-3, STVU, STVD, OEV, CKV, U/D

### 4.2 Backlight Unit

Ta=25°C

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Forward Current	I <sub>F</sub>	-	140	-	mA	
Forward Current Voltage	V <sub>F</sub>	-	6.4	-	V	
Backlight Power Consumption	W <sub>BL</sub>	-	896	-	mW	

Table 4.2 Backlight unit electrical characteristics



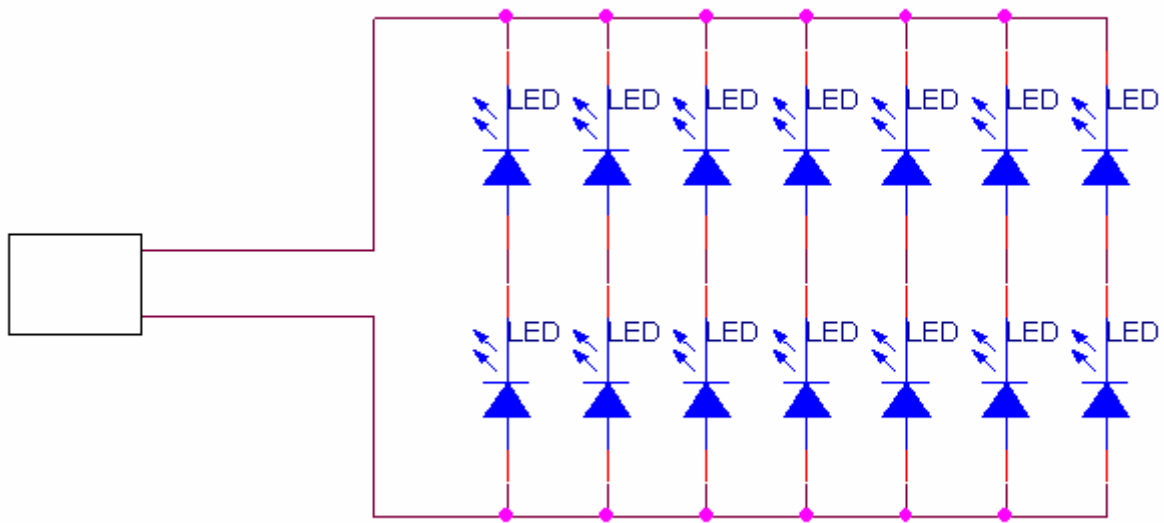


Figure 4.3 LED driver circuit

4.3. BLOCK DIAGRAM

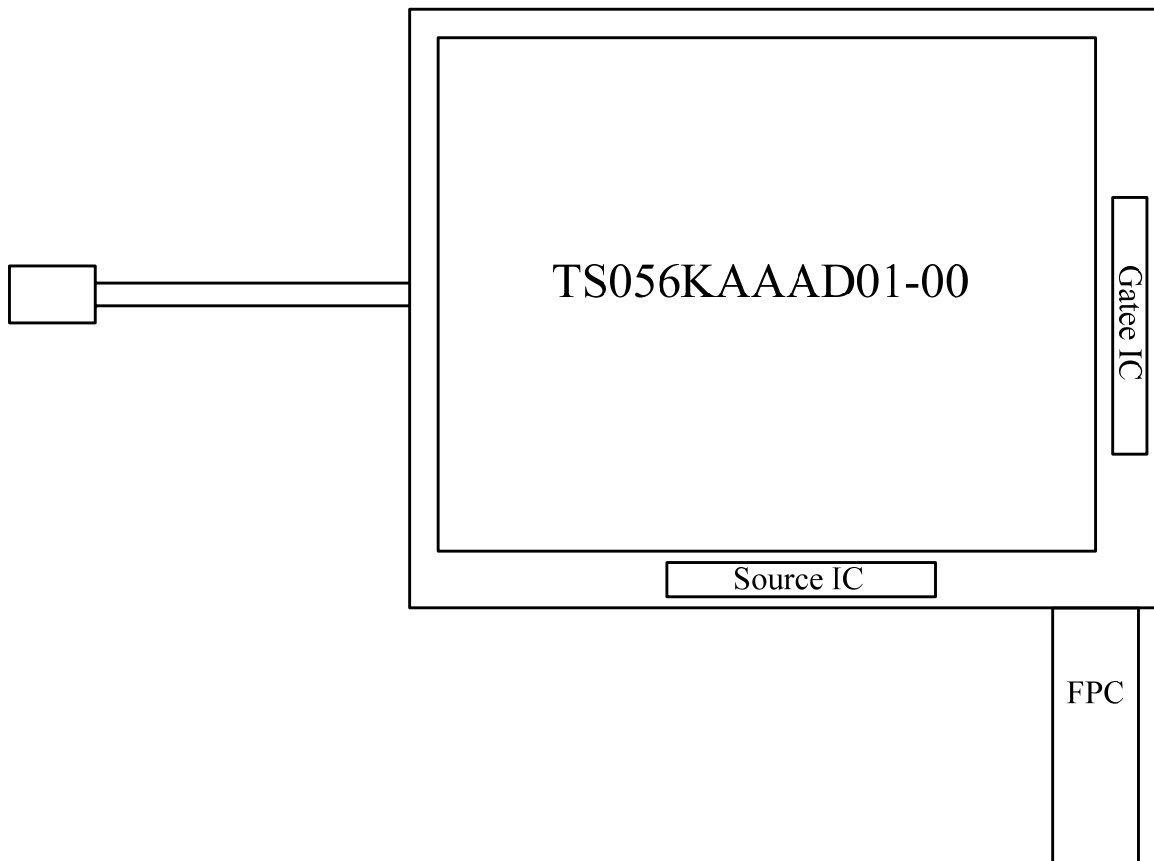


Figure 4.4 LCD module diagram



## 5 Timing chart

### 5.1 Timing Parameter

Parameter	Symbol	Min.	Typ.	Max.	Unit.	Remark
Rising time	$t_r$	-	-	60	ns	Note 1
Falling time	$t_f$	-	-	60	ns	Note 1
High and low level pulse width	$t_{CPH}$	150	154	158	ns	CPH1-3
CPH pulse width	$t_{CWH}$	40	50	60	%	CPH1-3
CPH pulse delay	$t_{12}$	30	$t_{CPH}/3$	$t_{CPH}/2$	ns	CPH1-3
	$t_{23}$					
	$t_{31}$					
STH setup time	$t_{SUH}$	20	-	-	ns	STHL/R
STH hold time	$t_{HDH}$	20	-	-	ns	STHL/R
STH pulse width	$t_{STH}$	-	1	-	$t_{CPH}$	STHL/R
STH period	$t_H$	61.5	63.5	65.5	us	STHL/R
OEH pulse width	$t_{OEH}$	-	7	-	us	
Sample and hold disable time	$t_{DIS1}$	-	55	-	us	
OEV pulse width	$t_{OEV}$	-	27	-	us	
CKV pulse width	$t_{CKV}$	16	-	40	us	
Clean enable time	$t_{DIS2}$	-	16	-	us	
Horizontal display time range	$t_{DH}$	-	960	-	$t_{CPH}/3$	
STV setup time	$t_{SUV}$	400	-	-	ns	STVD/U
STV hold time	$t_{HDV}$	400	-	-	ns	STVD/U
STV pulse width	$t_{STV}$	-	-	1	$t_H$	STVD/U
Horizontal line per field	$t_V$	256	262.5	268	$t_H$	Note 2
Vertical display start	$t_{SV}$	-	3	-	$t_H$	
Vertical display range	$t_{DV}$	-	234	-	$t_H$	
Vertical start line	$t_{SLV}$	-	-	21	$t_H$	
VCOM rising time	$t_{rCOM}$	-	-	5	us	
VCOM falling time	$t_{fCOM}$	-	-	5	us	
VCOM delay time	$t_{DCOM}$	-	-	3	us	
RGB delay time	$t_{DRGB}$	-	-	1	us	

Note 1: For all of logic signal.

Note 2: Please don't use odd horizontal lines to drive LCD panel for both odd and even field simultaneously.



5.2 Timing Diagram

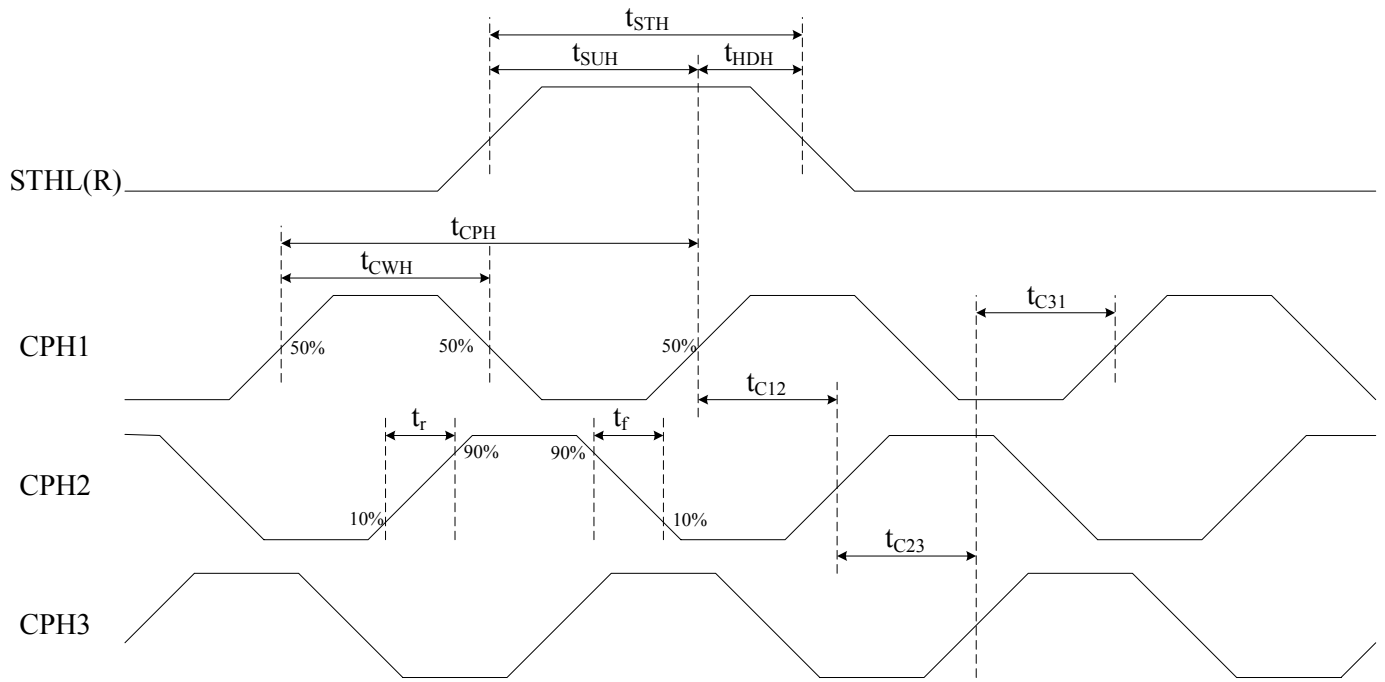


Figure 5.1: sampling clock timing

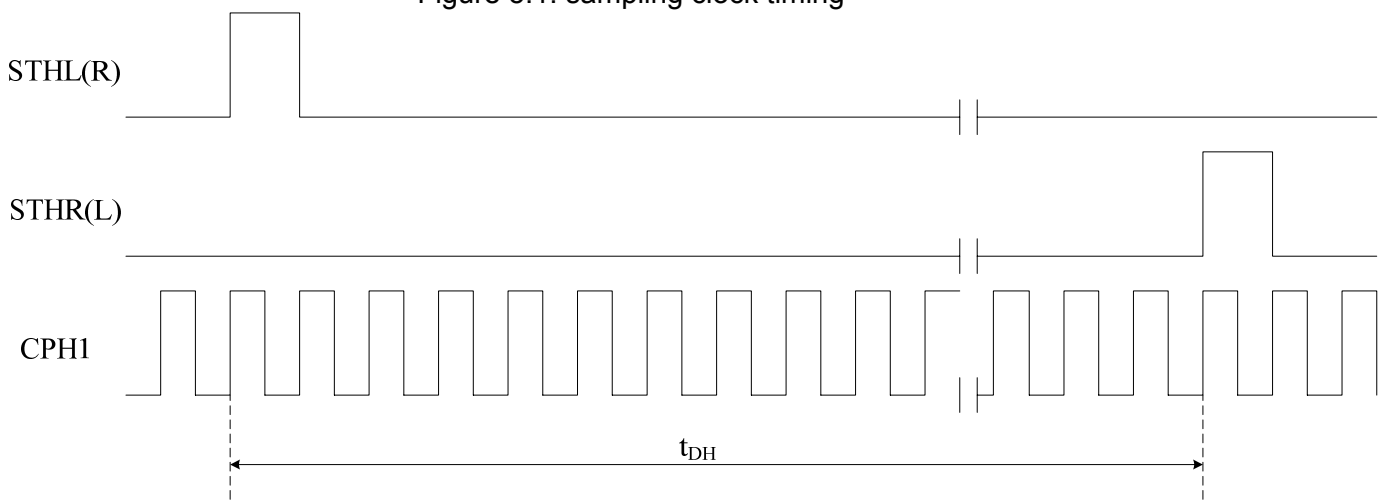


Figure 5.2: horizontal display range timing



Figure 5.3: horizontal display timing

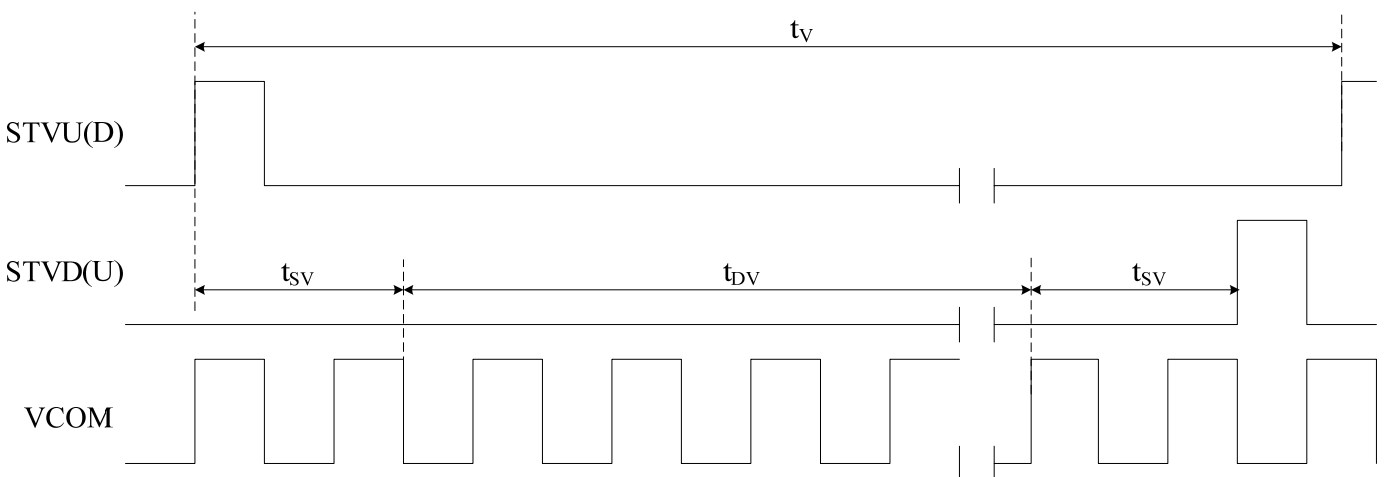


Figure 5.4: vertical display timing

The information contained herein is the exclusive property of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation.

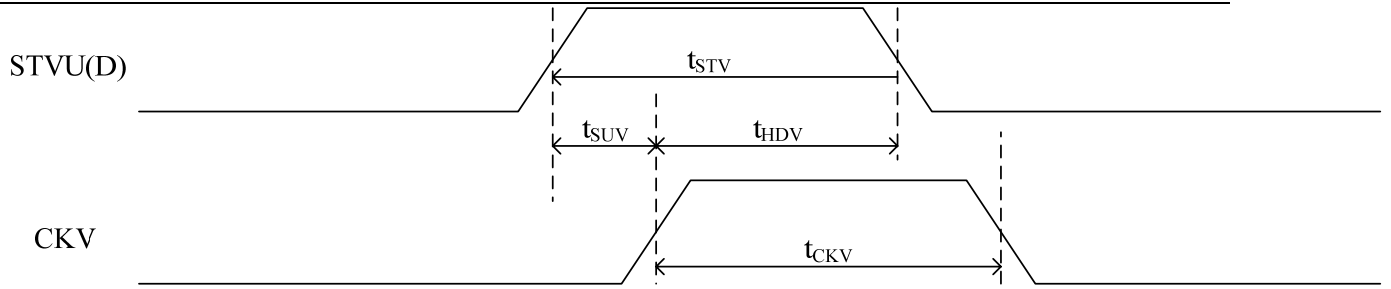


Figure 5.5: vertical shift clock timing

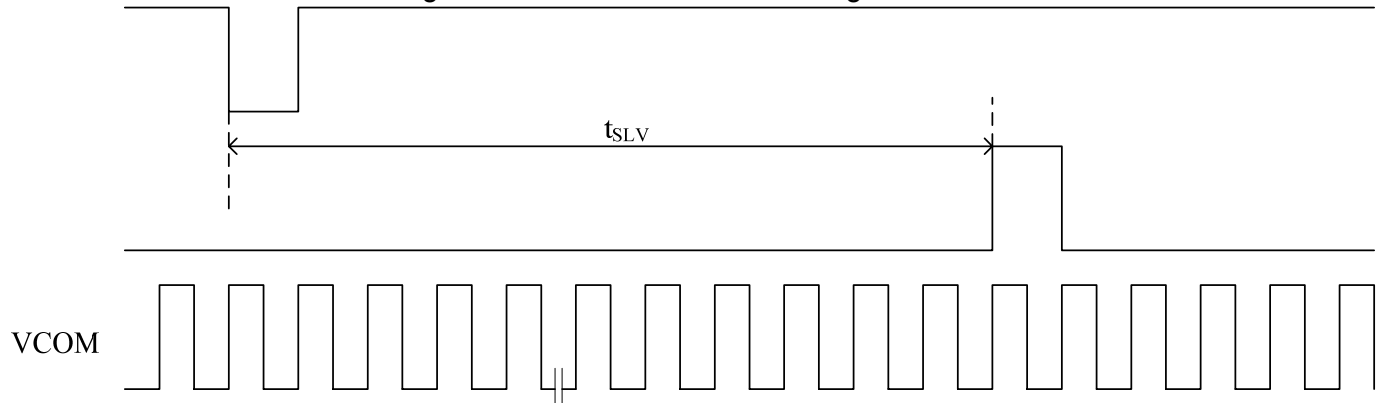


Figure 5.5: vertical start line timing



5.2. POWER ON/OFF SEQUENCE

5.2.1 Power on Sequence

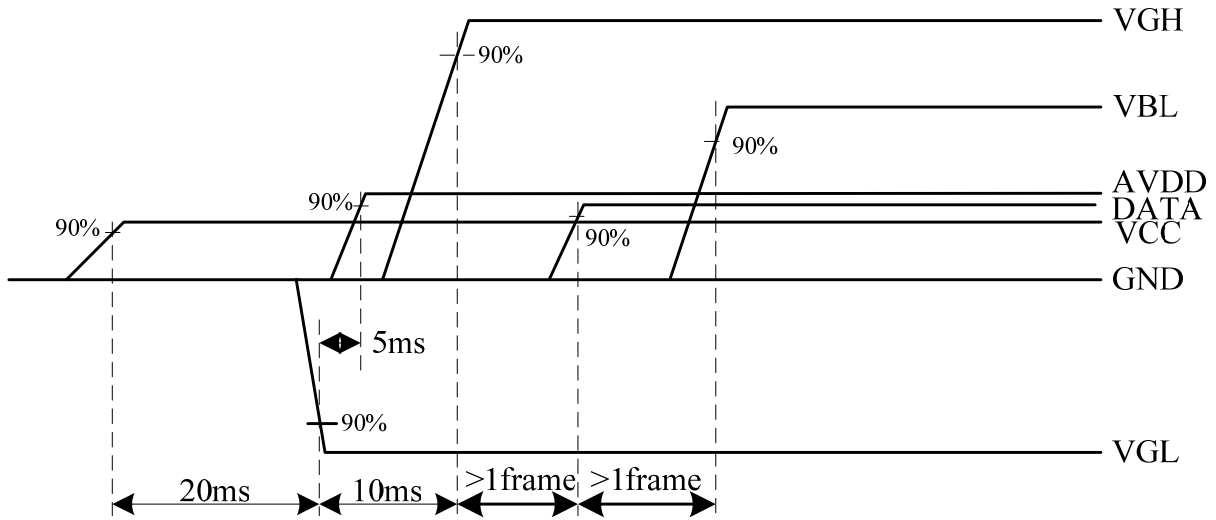


Figure 5.6 Power on sequence

Note: the interval time should more than the label

5.2.2 Power off Sequence

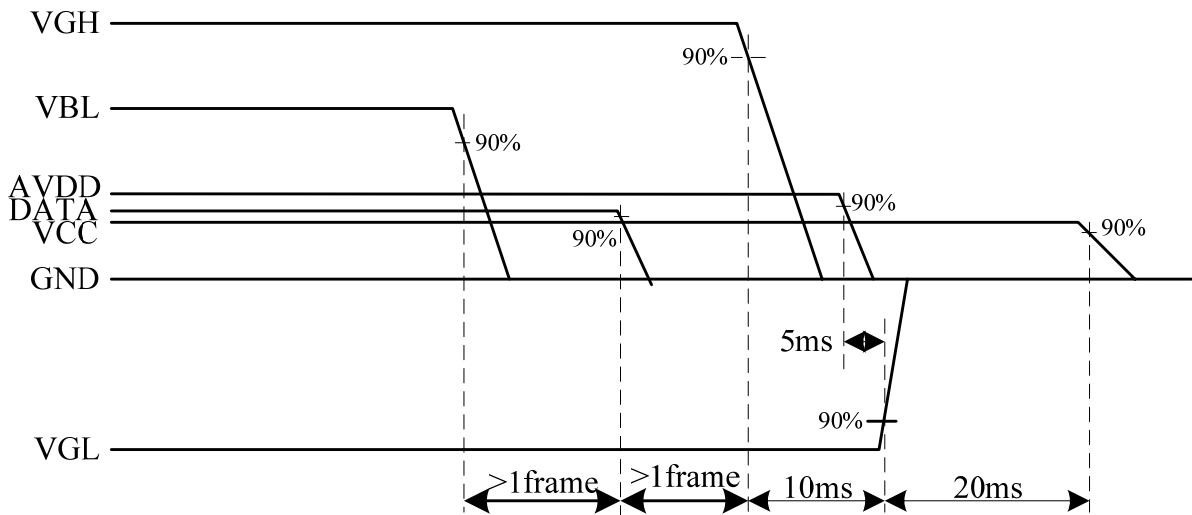


Figure 5.7 Power off sequence

Note: the interval time should more than the label



## 6 Optical characteristics

### 6.1 Optical Specification

Ta=25°C

Item	Symbol	Condition	Min	Typ.	Max.	Unit	Remark
View Angles	⊖ L	CR ≥ 10	55	65		Degree	Note 2,3
	⊖ R		55	65			
	⊖ T		35	45			
	⊖ B		55	65			
Contrast Ratio	CR	θ = 0°		300			Note 3
Response Time	Tr	25°C		25	50	ms	Note 4
	Tf						
Chromaticity	White	Backlight on		0.310			Note 1,5
				0.330			
Uniformity	U		70	80		%	Note 6
NTSC	(x,y)		45	50		%	Note 5
Luminance	L		160	200		cd/m <sup>2</sup>	Note 7


Test Conditions:

1. The ambient temperature is 25°C.
2. The test systems refer to Note 1 and Note 2.



Note 1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

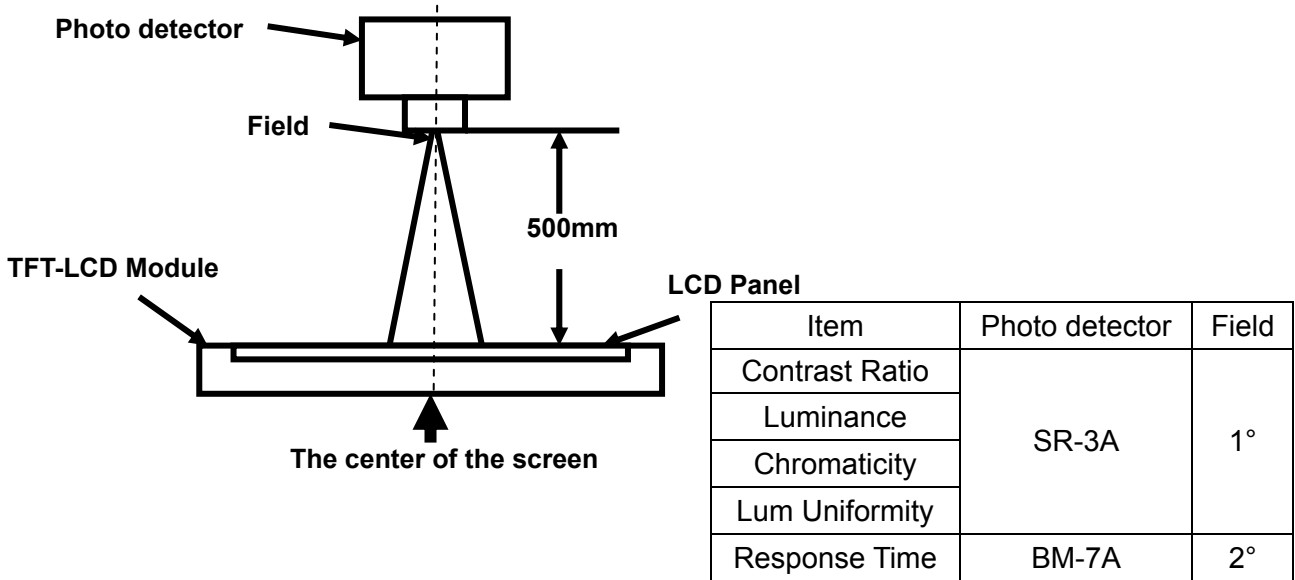

Note 2: Definition of viewing angle range and measurement system.

viewing angle is measured at the center point of the LCD by CONOSCOPE(ergo-80).

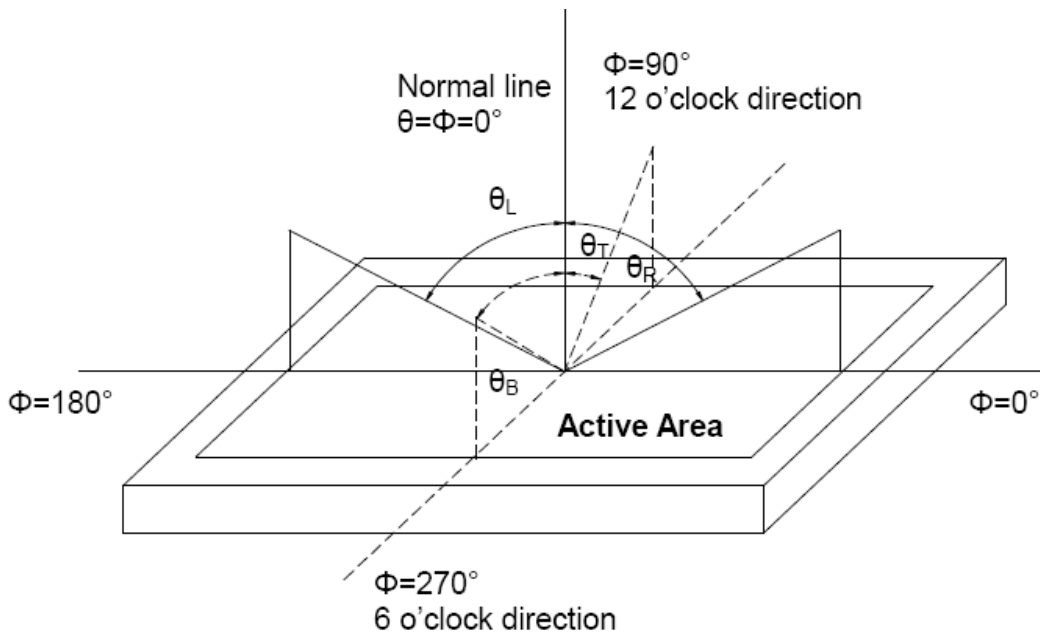


Fig. 6.1 Definition of viewing angle





Note 3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$


“White state “:The state is that the LCD should driven by Vwhite.

“Black state”: The state is that the LCD should driven by Vblack.

Vwhite: To be determined    Vblack: To be determined.

Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (TON) is the time between photo detector output intensity changed from 90% to 10%. And fall time (TOFF) is the time between photo detector output intensity changed from 10% to 90%.

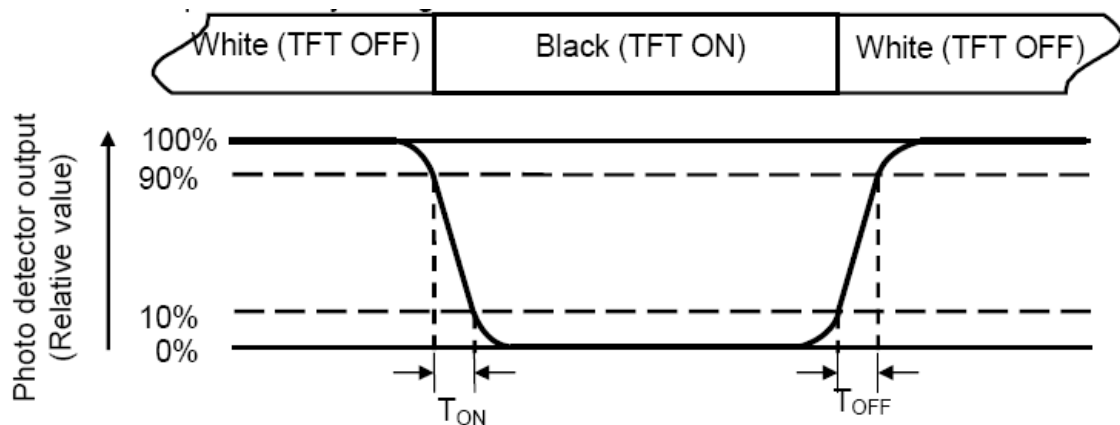

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.



Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity}(U) = L_{\min} / L_{\max}$$

L-----Active area length W----- Active area width

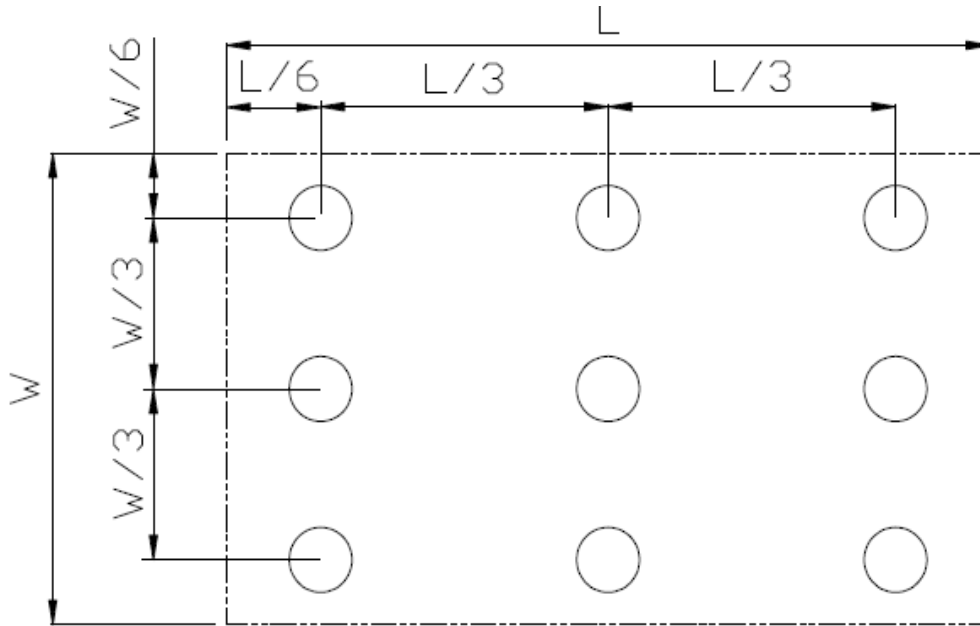


Fig. 6.2 Definition of uniformity

Lmax: The measured maximum luminance of all measurement position.

Lmin: The measured minimum luminance of all measurement position.

Note 7: Definition of Luminance :

Measure the luminance of white state at center point.

**7 Environmental / Reliability tests**


No	Test Item	Condition	Remarks
1	High Temperature Operation	Ts=+70°C, 240hrs	Note1 IEC60068-2-2,GB2423.2—89
2	Low Temperature Operation	Ta=-20°C, 240hrs	IEC60068-2-1 GB2423.1—89
3	High Temperature Storage (non-operation)	Ta=+80°C, 240hrs	IEC60068-2-2, GB2423.2—89
4	Low Temperature Storage (non-operation)	Ta=-30°C, 240hrs	IEC60068-2-1 GB2423.1—89
5	High Temperature & High Humidity Operation	Ta = +60°C, 90% RH max,240 hours	Note2 IEC60068-2-3, GB/T2423.3—2006
6	Thermal Shock (non-operation)	-30°C 30 min~+80°C 30 min, Change time:5min, 100 Cycle	Start with cold temperature, end with high temperature IEC60068-2-14,GB2423.22—87
7	Electro Static Discharge (operation)	±2KV,Human Body Mode, 100pF/1500Ω	IEC61000-4-2 GB/T17626.2—1998
8	Vibration (non-operation)	Sine Wave Frequency range:10~55Hz, Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z.(6 hours for total)	IEC60068-2-6 GB/T2423.10—1995
9	Shock (non-operation)	100G 6ms, ±X,±Y,±Z 3times for each direction	IEC60068-2-27 GB/T2423.5—1995
10	Package Drop Test	Height:80 cm, 1 corner, 3 edges, 6 surfaces	IEC60068-2-32 GB/2423.8—1995
11	Package Vibration Test	Random Vibration: 0.015G*G/Hz for 5-200Hz, -6dB/Octave from 200-500Hz 2 hours for each direction of X,Y,Z (6 hours for total)	IEC60068-2-34

Note1: Ts is the temperature of panel's surface.

Note2: Ta is the ambient temperature of samples.



8 Mechanical drawing

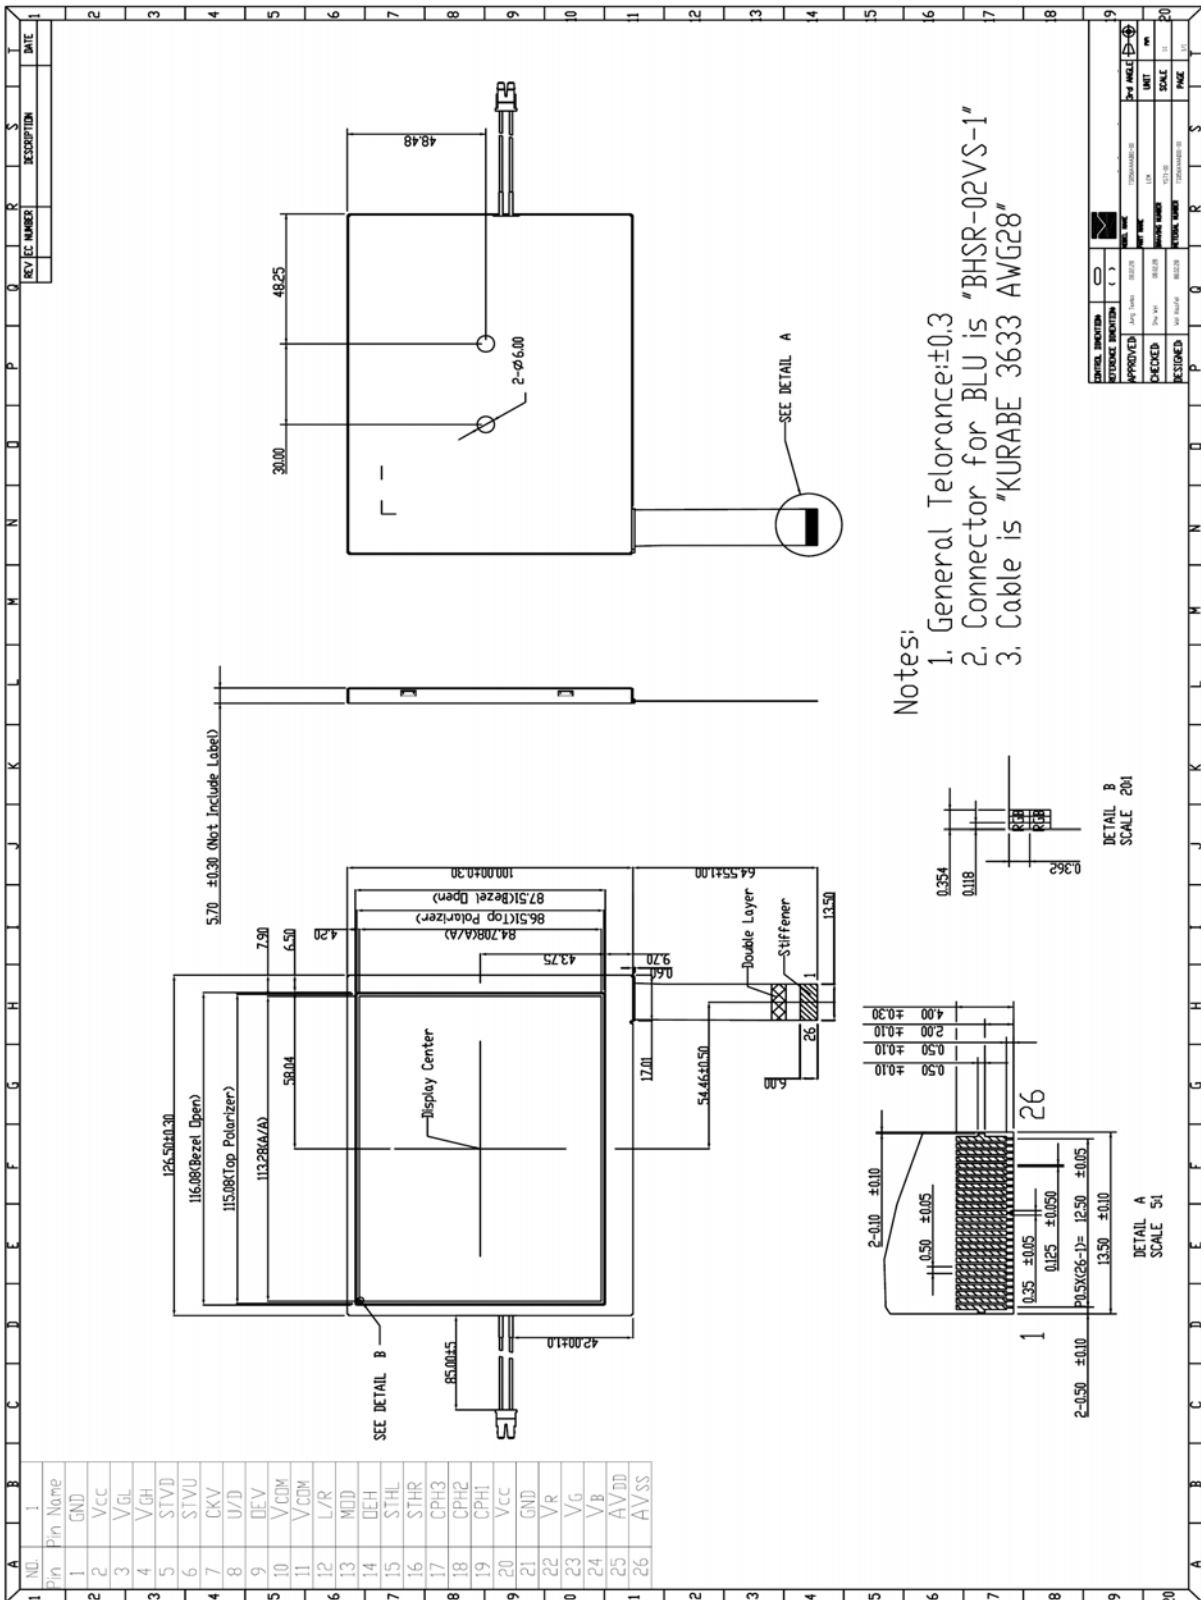

- Notes:
1. General Tolerance: ±0.3
  2. Connector for BLU is "BHSR-02VS-1"
  3. Cable is "KURABE 3633 AWG28"

DATE	REV	REC NUMBER	DESCRIPTION

CONTROL	INVENTOR	DESIGNER	CHECKED	APPROVED

DATE	SCALE	UNIT

The information contained herein is the exclusive property of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation.



## 9 Packing drawing

### 9.1 Packing Material Table


No	Item	Model (Material)	Dimensions(mm)	Unit Weight(Kg)	Quantity	Remark
1	LCM module	TS056KAAAD01-00	126.5*100.00*5.70 (including the dimensions of all parts)		50	
2	Partition_1	Corrugated Paper	513*333*215		1	
3.	Anti-Static Bag	PE	185*140		50	Anti-static
4	Dust-Proof Bag	PE	-----	0.0600	1	
5	Partition_2	Corrugated Paper	505*332*4.00		2	
6	Corrugated Bar	Corrugated Paper	513*190*4		4	
7	Carton	Corrugated Paper	530*350*250	1.1000	1	
8	Total weight	10.09±5%				

### 9.2 Packing Quantity

Total LCM quantity in Carton : no. of partition      2 Rows x quantity per Row 25 = 50



9.3 Packing Drawing

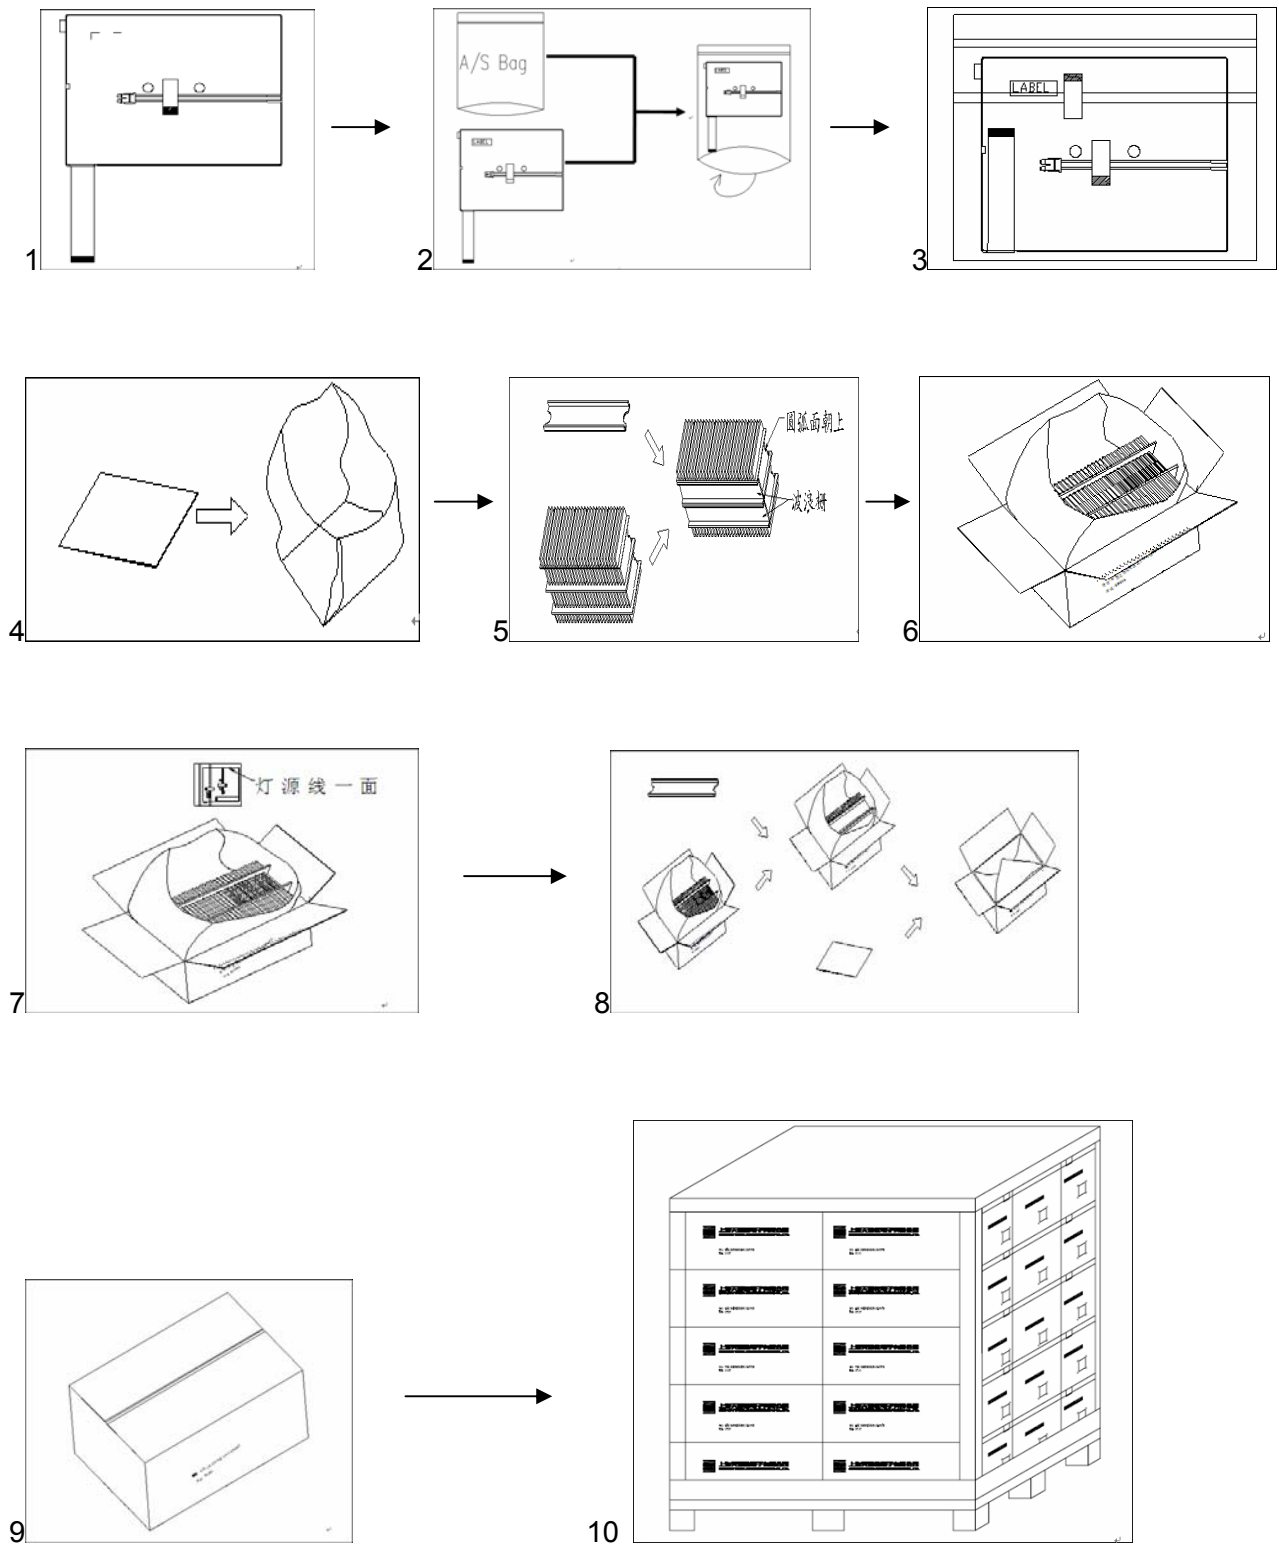

The information contained herein is the exclusive property of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation.



## 10 Precautions for use of LCD modules

### 10.1 Handling Precautions

- 10.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- 10.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.
- 10.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- 10.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- 10.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:
  - Isopropyl alcohol、
  - Ethyl alcohol
- 10.1.6 Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:
  - Water
  - Ketone
  - Aromatic solvents
- 10.1.7 Do not attempt to disassemble the LCD Module.
- 10.1.8 If the logic circuit power is off, do not apply the input signals.
- 10.1.9 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
- 10.2 Be sure to ground the body when handling the LCD Modules.
- 10.3 Tools required for assembly, such as soldering irons, must be properly ground.
- 10.4 To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
- 10.5 The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.
- 10.6 Storage precautions
  - 10.6.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.
  - 10.6.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:
- 10.7 Temperature : 0°C ~ 40°C      Relatively humidity: ≤80%
  - 10.7.1 The LCD modules should be stored in the room without acid, alkali and harmful gas.
  - 10.7.2 Transportation Precautions
- 10.8 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.