

# TD038STEC1

## 3.8" LTPS TFT LCD module

GO

in the title  
to describe

results 20

Advanced search

Home

About the


company

Catalog

Warehouse

Prices

Coordinates

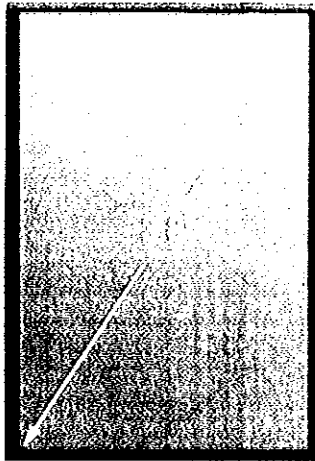

Characteristics:

- High brightness
- Low levels of energy consumption
- Technology COG
- Touch Screen
- RoHS coherent

Name

E-mail

Application:

- PDA
- Smart phones
- GPS

Specifications:

Parameter	Description
Mode display	Transflectivny (Transflective)
The size indicator on the diagonal	3.78 in.
The size of the active area (ShxV)	52.8 x 79.2 mm
Number of points	320 x RGB x 480
Size (ShxV)	0.055 x 0.165 mm
The number of reproducible colors	262K
Brightness	(B / L On) 110 cd / m <sup>2</sup>
Typical uniform	80%
Contrast ratio (B / L On)	80:1
Contrast ratio (B / L Off)	7:1
System interface	RGB parallel interface

Touch Screen	Analog type of resistance
Reflectivity	35%
Operating temperature range	-20 °C - 70 °C
The range of storage	-30 °C - 80 °C

Tel.: (3832) 66 4689

630092, Novosibirsk ul.Voshod 9

E-mail:

Site design: WFI

