

All information is subject to change without notice. Please read bottom notes.


RoHS compatible

**FEATURES :** (1) Analog RGB input  
(2) High luminance & Wide Viewing angle

Specification

TENTATIVE

Display size	5.5 type(14cm)
Number of Pixels	480(W) X 234(H) (WQVGA)
Display Mode	TFT-LCD (Transmissive type, Normally-White)
Pixel Pitch (mm)	0.0845(W) X 0.2925(H)
Luminance (typ.)	450 cd/m <sup>2</sup> at I <sub>FL</sub> =7.0mA(rms)
Response Time (max.)	T <sub>ON</sub> =11ms, T <sub>OFF</sub> =22ms
Contrast	300
Viewing Angle (CR≥10)	Vertical : 90 degree, Horizontal : 120 degree
I/F Format & Supply voltage	Analog, V <sub>DD</sub> =3.3V
Operating Temperature	-20 to 70 degree C
Outline dimension (mm)	136.0(W) X 82.6(H) X 6.0(D)mm
Weight (approximately)	117.5g
Backlight	Sidelight (1 CCFL)
Power Consumption	3.4W (Except the efficiency of FL inverter)

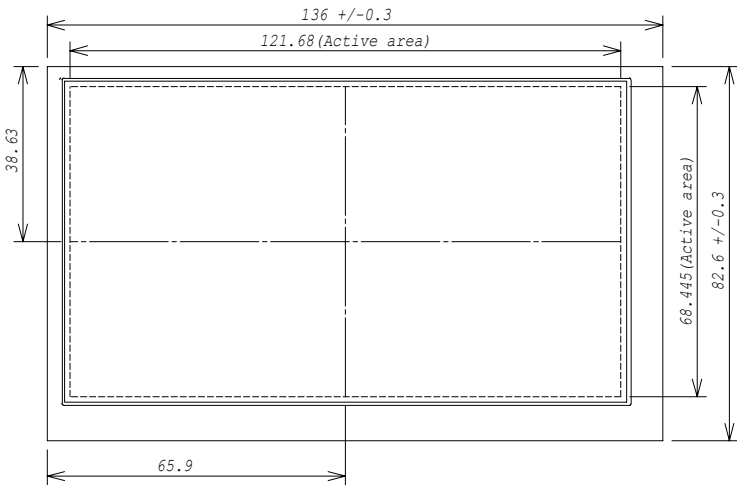

Rev.0.3R (2007/03/12)

\*The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Toshiba Matsushita Display Technology or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Toshiba Matsushita Display Technology or others.

\*The information contained herein may be changed without prior notice. It is therefore advisable to contact Toshiba Matsushita Display Technology before proceeding with the design of equipment incorporating this product.