

All information is subject to change without notice. Please read bottom notes.


RoHS compatible

- FEATURES :** (1) 9" WIDE-VGA(800x480 pixels) OCB mode
 (2) Fast Response Time
 (3) Wide Viewing Angle
 (4) LVDS interface system (H-Sync, V-Sync, DE)
 (5) Backlight inverter included

Specification

TENTATIVE

Display size	9.0 type(23cm)
Number of Pixels	800(W) X480(H) (WVGA)
Display Mode	TFT-LCD (Transmissive type, OCB-mode)
Pixel Pitch (mm)	0.246(W) X 0.246(H)
Luminance (typ.)	350 cd/m ²
Response Time (typ.)	T _{ON} =1.0ms, T _{OFF} =4.0ms
Contrast	350
Viewing Angle (CR≥10)	Vertical : 170 degree, Horizontal : 170 degree
I/F Format & Supply voltage	LVDS RGB 8bit, H/V sync+DE , V _{DD} =5.0V
Operating Temperature	-10 to 50 degree C
Outline dimension (mm)	215.0(W) X 135.0(H) X 40.0(D)mm
Weight (approximately)	600g
Backlight	CCFL, Six Straight Direct Type
Power Consumption	10.8W (Except the efficiency of FL inverter)

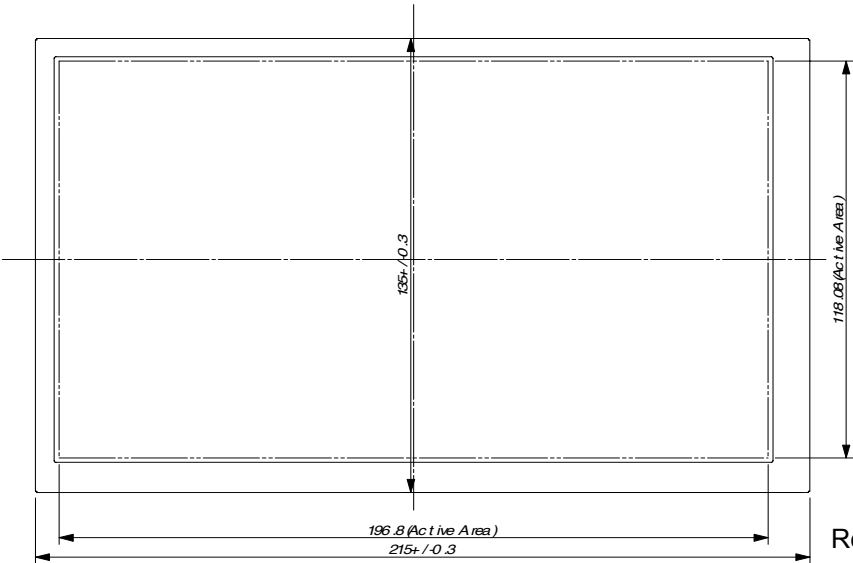

Rev.0.1R (2008/04/11)

*The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Toshiba Matsushita Display Technology or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Toshiba Matsushita Display Technology or others.

*The information contained herein may be changed without prior notice. It is therefore advisable to contact Toshiba Matsushita Display Technology before proceeding with the design of equipment incorporating this product.