

All information is subject to change without notice. Please read bottom notes.


RoHS compatible

FEATURES : (1) 5.8inch WQVGA(400x234 pixels) display (15:9 Aspect Ratio)
(2) Analog RGB & Composite Input
(3) High luminance & Wide viewing angle

Specification

TENTATIVE

Display size	5.8 type(15cm)
Number of Pixels	400(W) X 234(H) (WQVGA)
Display Mode	TFT-LCD (Transmissive type, Normally-White)
Pixel Pitch (mm)	0.318(W) X 0.307(H)
Luminance (typ.)	350 cd/m ²
Response Time (max.)	T _{ON} =20ms, T _{OFF} =40ms
Contrast (min.)	350
Viewing Angle (CR≥10)	Vertical : 90 degrees, Horizontal : 110 degrees
I/F Format & Supply voltage	Composite, Analog VGA,Analog RGB, V _{DD} =9.0V
Operating Temperature	-20 to 60 degrees C.
Outline dimension (mm)	145.0 (W) x 89.0 (H) x 15.8 max(D) mm
Weight (approximately)	200g
Backlight	FL side light (U type)
Power Consumption	7.5 W

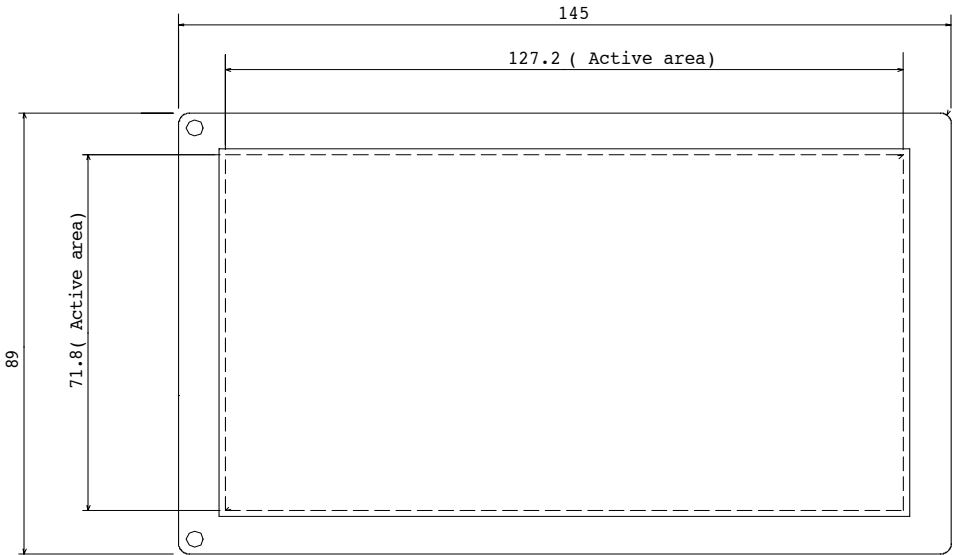

Rev.0.1 (2008/01/31)

*The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Toshiba Matsushita Display Technology or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Toshiba Matsushita Display Technology or others.

*The information contained herein may be changed without prior notice. It is therefore advisable to contact Toshiba Matsushita Display Technology before proceeding with the design of equipment incorporating this product.