HITACHI

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.

FOR MESSRS:	DATE: Jan. 14 th 200	09

CUSTOMER'S ACCEPTANCE SPECIFICATIONS

TX13D03VM1CPA

Contents

No.	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701-TX13D03VM1CPA-1	1-1/1
2	RECORD OF REVISION	7B64PS 2702-TX13D03VM1CPA-1	2-1/1
3	GENERAL DATA	7B64PS 2703-TX13D03VM1CPA-1	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704-TX13D03VM1CPA-1	4-1/1
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705-TX13D03VM1CPA-1	5-1/1
6	OPTICAL CHARACTERISTICS	7B64PS 2706-TX13D03VM1CPA-1	6-1/2~2/2
7	BLOCK DIAGRAME	7B64PS 2707-TX13D03VM1CPA-1	7-1/1
8	RELIABILITY TESTS	7B64PS 2708-TX13D03VM1CPA-1	8-1/1
9	LCD INTERFACE	7B64PS 2709-TX13D03VM1CPA-1	9-1/4~4/4
10	OUTLINE DIMENSIONS	7B63PS 2710-TX13D03VM1CPA-1	10-1/1
11	TOUCH PANEL	7B64PS 2711-TX13D03VM1CPA-1	11-1/2~2/2
12	APPEARANCE STANDARD	7B64PS 2711-TX13D03VM1CPA-1	12-1/4~4/4
13	PRECAUTIONS	7B64PS 2712-TX13D03VM1CPA-1	13-1/2~2/2
14	DESIGNATION OF LOT MARK	7B64PS 2713-TX13D03VM1CPA-1	14-1/1

ACCEPTED BY: PROPOSED BY: Dan Uling

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2701-TX13D03VM1CPA-1	PAGE	1-1/1
--	--------------	-----------------------------	------	-------

2. RE	CORD OF R	EVISI	NC				
DATE	SHEET No.				SUMMARY		
KAOHSI ELECTRO	IUNG HITACHI DNICS CO., LTD.	SHEET NO.		7B64PS	2702-TX13D03VM1CPA-1	PAGE	2-1/1

3. GENERAL DATA

3.1 DISPLAY FEATURES

This module is a 5" VGA of 4:3 format of amorphous silicon TFT. The pixel format is vertical stripe and sub pixels are arranged as R(red), G(green), B(blue) sequentially .This display is RoHs compliant , and COG (chip on glass) technology and LED backlight are applied on this display.

Part Name	TX13D03VM1CPA
Module Dimensions	119.4(W)mm x 89.1(H)mm x 10.3(D)mm typ
LCD Active Area	100.8(W)mm x 75.6(H)mm
Dot Pitch	0.0525(W)mm x 3(R,G,B)(W) x 0.1575(H)mm
Resolution	640x3(R,G,B))(W)x480(H) dots
Color Pixel Arrangement	R, G, B Vertical stripe
LCD Type	Transmissive Color TFT; Normally White
Display Type	Active Matrix
Number of Colors	262k Colors (R,G,B 6bit digital each)
Backlight	Light Emitting Diode (LED)
Weight	140 (typ.)
Interface	40pin C-MOS
Power Supply Voltage	3.3V for LCD driving 12 V for B / L driving
Power Consumption	0.33w for LCD ; 3.0w for B/L
Viewing Direction	6 O'clock (Angle where least gray scale inversion and brightness change occurs)
Touch Panel	Resistive type; Film on Glass; 4-wire type; Anti-glare surface

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2703-TX13D03VM1CPA-1	PAGE	3-1/1	l
--	--------------	-----------------------------	------	-------	---

4. ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit	Remarks
Supply Voltage for LCD	VDD	-0.3	4.0	V	-
Input Voltage of Logic	VI	-0.3	VDD+0.3	V	Note 1
Supply Voltage for B/L	V_{LED}	0	(15)	V	-
Operating Temperature	Тор	-20	70	°C	Note 2
Storage Temperature	Tst	-30	80	°C	Note 2

- Note 1: The rating is defined for the signal voltages of the interface such as DTMG, DCLK and RGB data bus.
- Note 2: The maximum rating is defined as above based on the temperature on the panel surface , which might be different from ambient temperature after assembling the panel into the application. Moreover, some temperature-related phenomenon as below needed to be noticed:

Background color, contrast and response time would be different in temperature other than $25\,^{\circ}\mathrm{C}$. Operating under high temperature will shorten LED life time.

5. ELECTRICAL CHARACTERISTICS

5.1 LCD CHARACTERISTICS

Ta=25°C,VSS=0V

Item	Symbol	Condition	Min.	Тур.	Max.	Unit	Remarks
Power Supply Voltage	VDD	-	3.0	3.3	3.6	V	-
Input Voltage of Logic	\/I	"H" level	0.7VDD	ı	VDD	\/	Note 1
Input voltage of Logic	VI	"L" level	VSS	-	0.3VDD	V	Note 1
Power Supply Current	IDD	VDD-VSS=3.3V	-	110	-	mA	Note 2
Vsync Frequency	fV	-	50.0	60.0	70.0	Hz	
Hsync Frequency	fH	-	26.3	31.5	36.8	KHz	-
DCLK Frequency	fCLK	-	21	25.2	29.4	MHz	

Note 1: The rating is defined for the signal voltages of the interface such as DTMG,DCLK and RGB data bus.

Note 2: An all black check pattern is used when measuring IDD. fV=60 Hz.

5.2 BACKLIGHT CHARACTERISTICS

 $T_a=25~^{\circ}C$

Item	Symbol	Cond	dition	Min.	Тур.	Max.	Unit	Remarks
B/L Input Voltage	V_{LED}	-	•	11.7	12.0	12.3	V	-
B/L Input Current	I _{LED}	-	•	-	250	-	mA	-
		Ana	alog	0	-	3.3	-	-
Driebto con Control	DIM		$V_{PWM}H$	-	3.3	3.6	V	-
Brightness Control		Digital	$V_{PWM}L$	0	-	0.2	V	
(100%→ () %)		(PWM)	f _{PWM}	1	-	10	KHz	Note 1
			t _{PWM}	(10)	-	-	μ s	
LED Lifetime	-	V _{LED} =	12.0 V	-	70K	-	hrs	Note 2

Note 1: PWM function

- By changing the duty ratio of High/Low of PWM pulse to control Brightness.
- Don't make the PWM terminal in a Floating state, and connect to GND when waiting.
- Please input PWM signal after V_{LED}(12V) is supplied.
- Please turn off V_{LED}(12V) after PWM signal is stopped.

Note 2: The estimated lifetime is specified as the time to reduce 50% brightness by applying at 25° C.

6. OPTICAL CHARACTERISTICS

The optical characteristics are measured based on the conditions as below:


- Supplying the signals and voltages defined in the section of electrical characteristics.
- The backlight unit needs to be turned on for 30 minutes.
- The ambient temperature is 25 °C.
- In the dark room around 500~1000 lx, the equipment has been set for the measurements as shown in Fig 6.1.

 $Ta=25 ^{\circ}C$, fV=60Hz, VDD=3.3V

Item	1	Symbol	Condition	Min.	Тур.	Max.	Unit	Remarks
Brightness (d	enter)	В	$\phi = 0^{\circ}$, $\theta = 0^{\circ}$	450	550	-	cd/m ²	Note 1
Brightness u	niformity	-	VLED= 12V,DIM=0V	70	-	-	%	Note 2
Contrast Rat	io	CR	(DutyCycle 0%)	250	500	-	-	Note 3
Response tin	ne	RISE(Ton)	4 0° 0 0	-	20	-	m.a	Note 4
		FALL(Toff)	$\phi = 0^{\circ}, \theta = 0$	-	10	-	ms	Note 4
NTSC Ratio		-	ϕ =0°, θ =0	-	50	-	%	-
		<i>θ</i> =X	ϕ =0°,CR \geq 5	-	70	-		
\	1-	<i>θ</i> =X''	<i>φ</i> =180°,CR≧5	-	70	-	D	Nista E
Viewing Ang	ie	<i>θ</i> =Y	<i>φ</i> =90°,CR≧5	-	70	-	Degree	Note 5
		<i>θ</i> =Y'	<i>φ</i> =270°,CR≧5	-	70	-		
	Dod	Χ		(0.55)	(0.60)	(0.65)		
	Red	Υ		(0.28)	(0.33)	(0.38)		
	Green	Χ		(0.29)	(0.34)	(0.39)		
Color	Green	Υ		(0.55)	(0.60)	(0.63)		
chromaticity	Blue	Х	$\phi = 0^{\circ}, \theta = 0$	(0.10)	(0.15)	(0.20)	-	Note 6
	Y	Υ		(0.07)	(0.13)	(0.18)		
		Х		(0.27)	(0.32)	(0.37)		
	vville	Y		(0.30)	(0.35)	(0.40)		

- Note 1: The brightness is measured from the center point of the panel, P5 in Fig. 6.2, for the typical value.
- Note 2: The brightness uniformity is calculated by the equation as below:

, which is based on the brightness values of the 9 points measured by BM-5 as shown in Fig. 6.2.

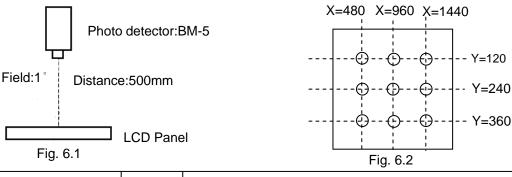


KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2706-TX13D03VM1CPA-1	PAGE	6-1/2	
--	--------------	-----------------------------	------	-------	--

Note 3: The Contrast Ratio is measured from the center point of the panel, P5, and defined as the following equation:


$$CR = \frac{Brightness of White}{Brightness of Black} X100\%$$

Note 4: The definition of response time is shown in Fig. 6.3. The rising time is the period from 90% brightness to 10% brightness when the data is from white to black. Oppositely, Falling time is the period from 10% brightness rising to 90% brightness.

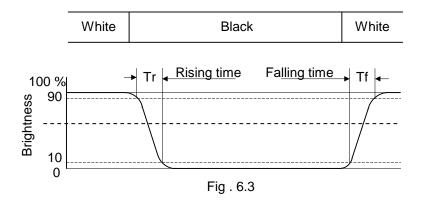


Note 5: The definition of viewing angle is shown in Fig. 6.4. Angle ϕ is used to represent viewing directions, for instance, ϕ =270° means 6 o'clock, and ϕ =0° means 3 o'clock. Moreover, angle θ is used to represent viewing angles from axis Z toward plane XY.

The viewing direction of this display is 6 o'clock, which means that a photograph with gray scale would not be reversed in color and the brightness change would be less from this direction. However, the best contrast peak would be located at 12 o'clock.

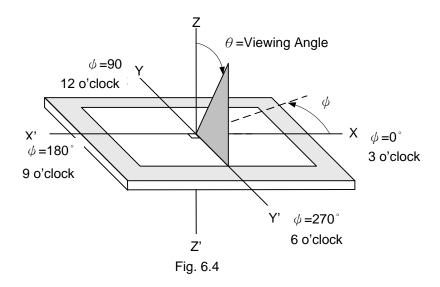


Note 6: The color chromaticity is measured from the center point of the panel, P5, as shown in Fig. 6.2.

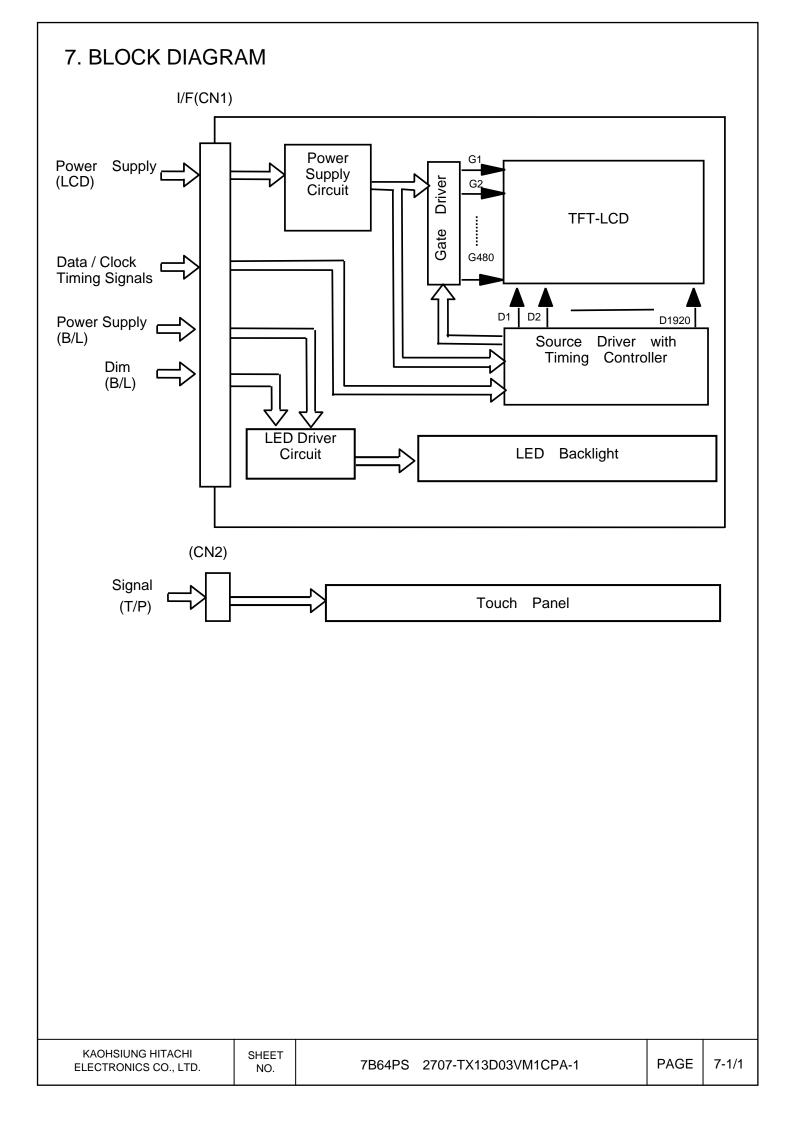

8. RELIABILITY TESTS

Test Item	Condition		
High Temperature	1) Operating 2) 70 °C	240 hrs	
Low Temperature	1) Operating 2) -20 °C	240 hrs	
High Temperature	1) Storage 2) 80 °C	240 hrs	
Low Temperature	 Storage -30 °C 	240 hrs	
Heat Cycle	1) Operating 2) -20 °C ~70 °C 3) 3hrs~1hr~3hrs	240 hrs	
Thermal Shock	 1) Non-Operating 2) -35 °C ↔ 85 °C 3) 0.5 hr ↔ 0.5 hr 	240 hrs	
High Temperature & Humidity	1) Operating 2) 40 °C & 85%RH 3) Without condensation 4) Note 3	240 hrs	
Vibration	1) Non-Operating 2) 20~200 Hz 3) 2G 4) X, Y, and Z directions	1 hr for each direction	
Mechanical Shock	1) Non-Operating 2) 10 ms 3) 50G 4) ±X, ± Y and ±Z directions	Once for each direction	
ESD	 Operating Tip: 200 pF, 250 Ω Air discharge for glass: ± 8KV Contact discharge for metal frame: ± 8KV Contact discharge for LCD interface: ±100V 	1) Glass: 9 points 2) Metal frame: 8 points 3) Connector: all pins	

- Note 1: Display functionalities are inspected under the conditions defined in the specification after the reliability tests.
- Note 2: The display is not guaranteed for use in corrosive gas environments.
- Note 3: Under the condition of high temperature & humidity, if the temperature is higher than 40° C, the humidity needs to be reduced as Fig. 7.1 shown.



KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2708-TX13D03VM1CPA-1	PAGE	8-1/1	
--	--------------	-----------------------------	------	-------	--

9 INTERNAL PIN CONNECTION

9.1 INTERNAL PIN CONNECTION


CN1 JAE: FA5B040HF1R3000 (Suitable FPC: t0.3±0.03mm, 0.5±0.03mm pitch)

PIN No.	SIGNAL	FUNCTION	PIN No	SIGNAL	FUNCTION				
1	VDD	Dower Cupply for Logic	21	G4	Cross Data				
2	VDD	Power Supply for Logic	22	G3	Green Data				
3	U/D	Vertical Display mode Control (Note 1)	23	VSS	GND				
4	L/R	Horizontal Display mode Control (Note 1)	24	G2					
5	Vsync	Vertical Sync Pulse	25	G1	Green Data				
6	DTMG	Timing Signal for Data	26	G0					
7	VSS	GND	27	VSS	GND				
8	DCLK	Dot Clock	28	R5					
9	VSS	GND	29	R4	Red Data				
10	Hsync	Horizontal Sync Pulse	30	R3					
11	VSS	GND	31	VSS	GND				
12	B5		32	R2					
13	B4	Blue Data	33	R1	Red Data				
14	В3		34	R0					
15	VSS	GND	35	MODE	Sync Mode Control (Note 2)				
16	B2		36	DIM	Brightness Control				
17	B1	Blue Data	37	VLED					
18	В0		38	VLED	Dower Supply for P/I				
19	VSS	GND	39	VLED	Power Supply for B/L				
20	G5	Green Data	40	VLED					

CN2

PIN No.	SIGNAL	FUNCTION						
1	X2	Touch	Panel	Signal				
2	Y1	Touch	Panel	Signal				
3	X1	Touch	Panel	Signal				
4	Y2	Touch	Panel	Signal				

Note 1: Scan direction is available to be switched as below by setting U/D and L/R pins.

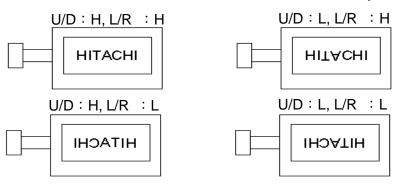

Note 2: Mode selection

H: DTMG only, no need Hsync and Vsync.L: Hsync and Vsync only, no need DTMG.

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2709-TX13D03VM1CPA-1	PAGE	9-1/4	
--	--------------	-----------------------------	------	-------	--

9.2 INTERFACE TIMING

	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARKS
DCLK	Cycle time	t _{CLK}	34.48	39.71	1		
	Low level Width	t _{WCL}	17.24	1	1	ns	-
	High level Width	t _{WCH}	17.24	-	-		
	Duty	D	0.45	0.5	0.55	-	$D = t_{CLKL} / t_{CLK}$
Data	Set up time	t _{SD}	12	ı	ı	20	for DCLK
	Hold time	t _{HD}	12	-	1	ns	for DCLK

Note: Vsync Cycle should be set to odd.


Hsync-Vsync Mode

	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARKS
Hsync	Set up time	t _{SH}	12	-	1	20	for DCLK
	Hold time	t _{HH}	12	-	1	ns	for DCLK
	Cycle time	t _{HP}	792	800	1039		
	Valid width	t _{WH}	6	96	138	tCLK	
	Horizontal back porch	t _{HBP}	144	144	144		
Vsync	Set up time	t _{SV}	12	-	-	20	for DCLK
	Hold time	t _{HV}	12	-	-	ns	for DCLK
	Cycle time	t _{VP}	496	525	747		
	Valid width	t _{WV}	2	2	10	tHP	
	Vertical back porch	t _{VBP}	12	12	12		

DTMG Mode

	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARKS
DTMG	Set up time	t _{SI}	12	-	-	no	for DCLK
	Hold time	t _{HD}	12	-	-	ns	for DCLK
	Horizontal back porch	t _{HBP}	115	160	255		
	Horizontal front porch	t _{HFP}	0	0	0	tCLK	
	Cycle time	t _{HP}	755	800	895		
	Vertical back porch	t _{VBP}	6	45	255		
	Vertical front porch	t _{VFP}	0	0	0	tHP	
	Cycle time	t _{VP}	486	525	735		

9.3 POWER ON/OFF SEQUENCE

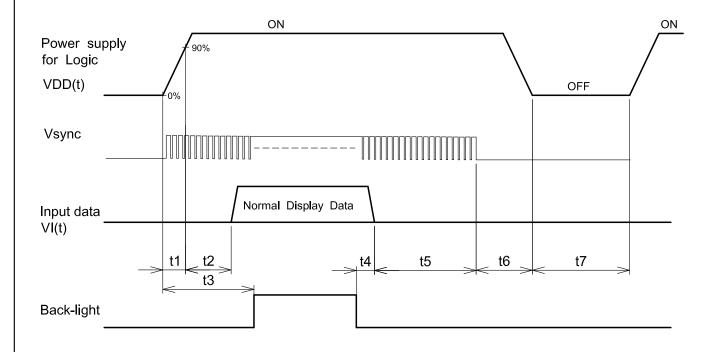

POWER ON

$$\begin{array}{c} t_1 \leqq 1ms \\ \text{Vsync x 4} < t_2 \leqq \text{Vsync x 8} \\ \text{Vsync x 8} \leqq t_3 \end{array}$$

POWER OFF

$$5ms \le t_4$$

$$Vsync x 4 \le t_5$$

$$10ms \le t_6 \le 50 ms$$


$$400ms \le t_7$$

Note 1: $0V \le VI(t) \le VDD(t)DTMG$ is definition of the above timing for Hsync and Vsync. Input data must be set to low for power on / off even t1+t2 and t5+t6.

Note 2: Input data should not be set high impedance when power on.

9.4 RELATIONSHIP BETWEEN DISPLAYED COLOR AND INPUT DATA

	COLOR & Gray Scale								[Data	Signa	al							
	Gray Ocaic	R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	В3	B2	B1	B0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (0)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green (0)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Basic	Blue (0)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Color	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (62)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red (61)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
Red	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red (1)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red (0)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green (62)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Green (61)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
Green	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green (1)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	Green (0)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue (62)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue (61)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Blue	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue (1)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue (0)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

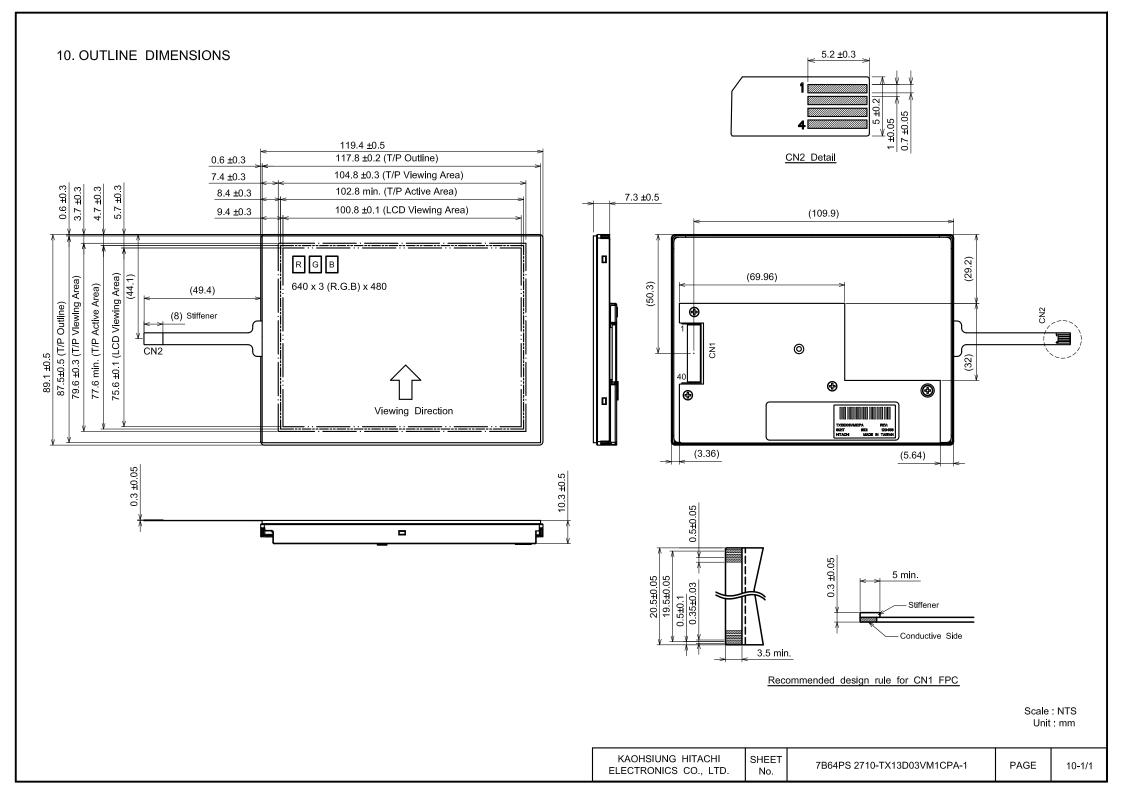

11. TOUCH PANEL

The type of touch panel used on this display is resistive, analog, 4-wire and film on glass, and more characteristics are shown as below:

11.1 OPERATING CONDITIONS

Item	Specification	Remarks		
Operating Voltage	5VDC	-		

11.2 ELECTRICAL CHARACTERISTICS

Item		Specification	Remarks
Resistance	X1-X2	(260~900)Ω	
Between Terminal	Y1-Y2	(240~750) Ω	-
Insulation Resistance	X-Y	20M Ω min.	At 25V DC
Linnality	X	±1.5% max.	Note 4
Linearity	Y	±1.5% max.	Note 1
Chattering		10ms max.	-

Note 1: The test conditions and equipments of linearity are as below:


- Material of pen: poly-acetal resin


- End shape: R 0.8 mm

- Test force: 80 gf

- Pitch: 10 mm

- Test area is shown in Fig. 10.1





As shown in Fig. 10.2, applying voltage meter to measure Va, Vb and Vxm, where Va is the maximum voltage in the active area; Vb is the minimum voltage in the active area; Vxm is the measured voltage of point x selected by random. Afterwards, the linearity can be calculated by following equation:

$$Linearity = \frac{|Vxi - Vxm|}{Va - Vb} \times 100\%,$$

where Vxi is the idea voltage of point x.

The method to measure the linearity of Y-axis is the same as above.

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2711-TX13D03VM1CPA-1	PAGE	11-1/2	
--	--------------	-----------------------------	------	--------	--

11.3 MECHANICAL CHARACTERISTICS

Item	Specification	Remarks
Pen Input Pressure	1.2 N max.	R0.8, Polyacetal Pen
Finger	1.2 N max.	R8.0, Silicon Rubber
Surface Hardness	3H min.	JIS K 5400

11.4 OPTICAL CHARACTERISTICS

Item	Specification	Remarks	
Transmittance	80% min.	-	

10.5 SAFETY AND ATTENTIONS

- 1) Do not put heavy shock or stress on the touch panel.
- 2) Please use soft cloth or absorbent cotton with ethanol to clean the touch panel by gently wiping. Moreover, please wipe it by horizontal or vertical direction instead of circling to prevent leaving scars on the touch panel's surface.
- 3) Do not use any harmful chemicals such as acetone, toluene, and isopropyl alcohol to clean the display's surface.

12. APPEARANCE STANDARD

The appearance inspection is performed in a dark room around 2000 lx based on the conditions as below:

- The distance between inspector's eyes and display is 30 cm.
- The viewing zone is defined with angle θ shown in Fig. 12.1 The inspection should be performed within 45° when display is shut down. The inspection should be performed within 25° when display is power on.




Fig 12.1

12.1 THE DEFINITION OF LCD ZONE

LCD panel is divided into 3 areas as shown in Fig.12.2 for appearance specification in next section. A zone is the LCD active area (dot area); B zone is the area, which extended 1 mm out from LCD active area; C zone is the area between B zone and metal frame.

In terms of housing design, B zone is the recommended window area customers' housing should be located in.

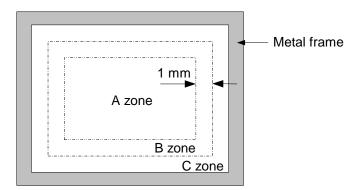



Fig 12.2

12.2 LCD APPEARANCE SPECIFICATION

The specification as below is defined as the amount of unexpected phenomenon or material in different zones of LCD panel. The definitions of length, width and average diameter using in the table are shown in Fig. 12.3 and Fig. 12.4.


Item	Criteria			Applied zone				
	Length (mm)	Width (mm)	Maxim	num numb	oer	Minimum space		
Canadahaa	Ignored	W≦0.02	I,	Ignored		-	4 D	
Scratches	L≦40 0	.02 <w≦0.04< td=""><td></td><td colspan="2">10</td><td>-</td><td>A,B</td></w≦0.04<>		10		-	A,B	
	L≦20	W≦0.04		10		-		
Dent		Serious o	ne is not al	lowed	wed		А	
Wrinkles in polarizer		Serious o	ne is not al	lowed			А	
	Average diam	eter (mm)		Maximu	um n	umber		
	D≦	≦ 0.2		lg	nore	d		
Bubbles on polarizer	0.2 < D≦	≦ 0.3			12		Α	
	0.3 <d≦< td=""><td>≦0.5</td><td></td><td></td><td>3</td><td></td><td></td></d≦<>	≦ 0.5			3			
	0.5 <d< td=""><td></td><td></td><td>r</td><td>none</td><td></td><td></td></d<>			r	none			
		Filamento	us (Line s	shape)				
	Length (mm)	W	dth (mm)		Maximum number			
	L≦2.0		W≦0.03		Ignored		A,B	
	L≦3.0	0.03	0.03 <w≦0.05< td=""><td></td><td>6</td><td></td></w≦0.05<>			6		
	L≦2.5	0.0	0.05 <w≦0.1< td=""><td></td><td>1</td><td></td></w≦0.1<>			1		
1) Stains		Round	Round (Dot shape)					
2) Foreign Materials	Average diameter (r	nm) Maxir	Maximum number		Min	imum Space		
3) Dark Spot	D<0.2		Ignored		-			
	0.2≦D<0.3 10			10mm		A,B		
	0.3≦D<0.4		5			30mm	А,Б	
	0.4≦D		none		-			
	In total		Filamentous + Round=10					
		Those wiped o	ut easily are	acceptable	Э			
			Type		Maxi	mum number		
			1 dot			4		
	Bright dot-defect	2 a	djacent dot			1		
Dot-Defect (Note 1)	Bright dot delect	3 adjace	3 adjacent dot or above		e Not allowed		А	
			In total		5			
			1 dot			5	, ,	
	Dark dot-defect	2 a	2 adjacent dot		2			
	Daik dot dolect	3 adjace	3 adjacent dot or above		Not allowed			
			In total		5			
	In total				10			

KAOHSIUNG HITACHI ELECTRONICS CO., LTD.	SHEET NO.	7B64PS 2712- TX13D03VM1CPA-1	PAGE	12-2/4	
--	--------------	------------------------------	------	--------	--

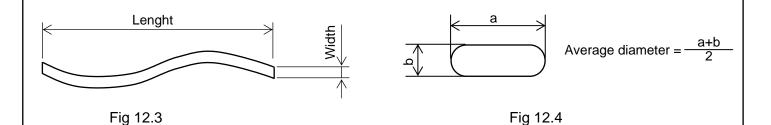

Note 1: The defi nitions of dot defect are as below:

- The defect area of the dot must be bigger than half of a dot.
- For bright dot-defect, showing black pattern, the dot's brightness must be over 30% brighter than others.
- For dark dot-defect, showing white pattern, the dot's brightness must be under 70% darker than others.
- The definition of 1-dot-defect is the defect-dot, which is isolated and no adjacent defect-dot.
- The definition of adjacent dot is shown as Fig. 12.5.
- The Density of dot defect is defined in the area within diameter ϕ =20mm.



12.3 TOUCH PANEL APPEARANCE SPECIFICATION

The specification as below is defined by the amount of unexpected material in different zones of touch panel.

Item	Criteria			Applied zone		
	Width (mm)	Length	n (mm)	Maximum number		
Scratches	W>0.1	L≧	<u>1</u> 0	Not allowed	A,B	
Scratches	$0.10 \ge W > 0.05$	L<	10	4 pcs max.	A,D	
	0.05≧W	L<	10	Ignored		
	Fi	Filamentous (Line shape)				
	Width (mm) Le		n (mm)	Maximum number	A,B	
	$0.10 \ge W > 0.05$	3 <l< td=""><td>Not allowed</td><td>A,D</td></l<>		Not allowed	A,D	
Foreign Motorials	0.05≧W	L≦3		Ignored		
Foreign Materials	Round (Do		ot shape)			
	Average diameter (mm)		Ma	ximum number	A,B	
D>0.35			Not allowed			
	0.35≧D>0.25		6 pcs max.		В	
	D≦0.25			Ignored	A,B	

The limitation of glass flaw occurred on touch panel is defined in the table as below.

Item	Specifications		
Edge flaw	X Z	$X \leq 5.0 \text{ mm}$ $Y \leq 3.0 \text{ mm}$ $Z \leq \text{Thickness}$	
Corner flaw	X Y Y	$X \leq 3.0 \text{ mm}$ $Y \leq 3.0 \text{ mm}$ $Z \leq \text{Thickness}$	
Progressive flaw		Not allowed	

13. PRECAUTIONS

13.1 PRECAUTIONS of MOUNTING

- 1) Please refer to Fig. 13.1 for housing the display with touch panel into applications. The Fig. 13.1 shows some points as below:
- The cushion needs to be designed between housing and touch panel in order to avoid unexpected pressure to cause any wrong reactions, and the cushion should be located in the insulated area.
- The housing should not cover the active area of touch panel as the figure shown.

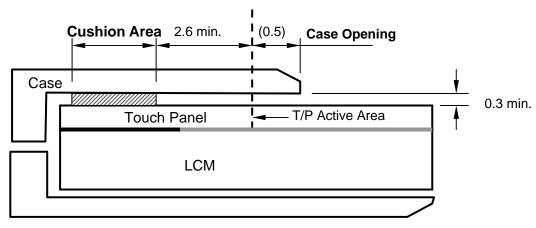


Fig 13.1

13.2 PRECAUTIONS of ESD

- 1) Before handling the display, please ensure your body has been connected to ground to avoid any damages by ESD. Also, do not touch display's interface directly when assembling.
- 2) Please remove the protection film very slowly before turning on the display to avoid generating ESD.

13.3 PRECAUTIONS of HANDLING

- 1) In order to keep the appearance of display in good condition, please do not rub any surfaces of the displays by sharp tools harder than 3H, especially touch panel, metal frame and polarizer.
- 2) Please do not stack the displays as this may damage the surface. In order to avoid any injuries, please avoid touching the edge of the glass or metal frame and wore gloves during handling.
- 3) Touching the polarizer or terminal pins with bare hand should be avoided to prevent staining and poor electrical contact.
- 4) Do not use any harmful chemicals such as acetone, toluene, and isopropyl alcohol to clean display's surfaces.
- 5) Please use soft cloth or absorbent cotton with ethanol to clean the display by gently wiping. Moreover, when wiping the display, please wipe it by horizontal or vertical direction instead of circling to prevent leaving scars on the display's surface, especially polarizer.
- 6) Please wipe any unknown liquids immediately such as saliva, water or dew on the display to avoid color fading or any permanently damages.
- 7) Maximum pressure to the surface of the display must be less than 10.4x10⁴ Pa. If the area of adding pressure is less than 1cm², the maximum pressure must be less than 1.96N.

KAOHSIUNG HITACHI	SHEET	-D04D0 0-40 TV40D00\4440D4	5405	40.4/0
ELECTRONICS CO., LTD.	NO.	7B64PS 2713- TX13D03VM1CPA-1	PAGE	13-1/2
	I		1 1	

13.4 PRECAUTIONS OF OPERATING

- 1) Please input signals and voltages to the displays according to the values defined in the section of electrical characteristics to obtain the best performance. Any voltages over than absolute maximum rating will cause permanent damages to this display. Also, any timing of the signals out of this specification would cause unexpected performance.
- 2) When the display is operating at significant low temperature, the response time will be slower than it at 25 °C . In high temperature, the color will be slightly dark and blue compared to original pattern. However, these are temperature-related phenomenon of LCD and it will not cause permanent damages to the display when used within the operating temperature.
- 3) The use of screen saver or sleep mode is recommended when static images are likely for long periods of time. This is to avoid the possibility of image sticking.
- 4) Spike noise can cause malfunction of the circuit. The recommended limitation of spike noise is no bigger than ± 100 mV.


13.5 PRECAUTIONS of STORAGE

If the displays are going to be stored for years, please be aware the following notices.

- 1) Please store the displays in a dark room to avoid any damages from sunlight and other sources of UV light.
- 2) The recommended long term storage temperature is between 10 °C ~35 °C and 55%~75% humidity to avoid causing bubbles between polarizer and LCD glasses, and polarizer peeling from LCD glasses.
- 3) It would be better to keep the displays in the container, which is shipped from Hitachi, and do not unpack it.
- 4) Please do not stick any labels on the display surface for a long time, especially on the polarizer.

14. DESIGNATION of LOT MARK

1) The lot mark is showing in Fig.13.3. First 4 digits are used to represent production lot, T represented made in Taiwan, and the last 5 digits are the serial number.

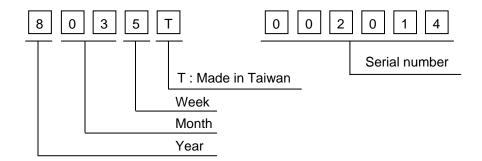

2) The tables as below are showing what the first 4 digits of lot mark are shorted for.

Year	Mark
2009	9
2010	0
2011	1
2012	2
2013	3

Month	Mark	Month	Mark
1	01	7	07
2	02	8	08
3	03	9	09
4	04	10	10
5	05	11	11
6	06	12	12

Week (Days)	Mark
1~7	1
8~14	2
15~21	3
22~28	4
29~31	5

- 3) Except letters I and O, revision number will be shown on lot mark and following letters A to Z.
- 4) The location of the lot mark is on the back of the display shown as below .

