SPECIFICATION FOR APPROVAL

- () Preliminary Specification
- () Final Specification

Title 65.0" QWUXGA TFT LCD	Title	
----------------------------	-------	--

BUYER	General
SET MODEL	

SUPPLIER	LG Display Co., Ltd.
*MODEL	LD650EQE
SUFFIX	FJA1(RoHS Verified)

APPROVED BY	SIGNATURE DATE
	_
/	<u></u>

your signature and comments.

APPROVED BY	SIGNATURE					
SungJun Lee / Team Leader	0/6/2					
REVIEWED BY						
Jikyoung Kim / Project Leader	249.2.9					
PREPARED BY Hyunjin Kim / Engineer	7/2/20219					
TV Product Development Dept. LG Display Co., Ltd.						

CONTENTS

Number	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	6
3-1	ELECTRICAL CHARACTERISTICS	6
3-2	INTERFACE CONNECTIONS	8
3-3	SIGNAL TIMING SPECIFICATIONS	10
3-4	V by Oone SIGNAL SPECIFICATIONS	11
3-5	COLOR DATA REFERENCE	13
3-6	POWER SEQUENCE	14
4	OPTICAL SPECIFICATIONS	15
5	MECHANICAL CHARACTERISTICS	19
6	RELIABILITY	22
7	INTERNATIONAL STANDARDS	23
7-1	Safety	23
7-2	ENVIRONMENT	23
8	PACKING	24
8-1	INFORMATION OF LCM LABEL	24
8-2	PACKING FORM	24
9	PRECAUTIONS	25
9-1	MOUNTING PRECAUTIONS	25
9-2	OPERATING PRECAUTIONS	25
9-3	ELECTROSTATIC DISCHARGE CONTROL	26
9-4	PRECAUTIONS FOR STRONG LIGHT EXPOSURE	26
9-5	STORAGE	26
9-6	HANDLING PRECAUTIONS FOR PROTECTION FILM	26
9-7	Appropriate Condition for Commercial Display	27

Ver. 1.0 2 / 33

RECORD OF REVISIONS

Revision No.	Revision Date	Page	Description
0.1	2018.04.22	-	Preliminary Specification (First Draft)
0.2	2018.10.01	6	Electrical Characteristics Update
0.3	2019.01.10	14	T5:1→3
1.0	2019.02.19		Final Specification
Ver. 1.0			3/33


3 / 33

1. General Description

The LD650EQE is a Color Active Matrix Liquid Crystal Display with an integral Light Emitting Diode (LED) backlight system. The matrix employs a-Si Thin Film Transistor as the active element.

It is a transmissive display type which is operating in the normally black mode. It has a 64.53 inch diagonally measured active display area with QWUXGA resolution (2160 vertical by 3840 horizontal pixel array). Sub-pixels are constructed with Red, Green and blue. Each pixel is divided into RGB. Gray scale or the luminance of the sub-pixel color is determined with a 10-bit gray scale signal for each dot. Therefore, it can present a palette of more than 1.07Bilion colors. It has been designed to apply the 10-bit 8 Lane V by One interface.

It is intended to support LCD TV, PCTV where high brightness, super wide viewing angle, high color gamut, high color depth and fast response time are important.

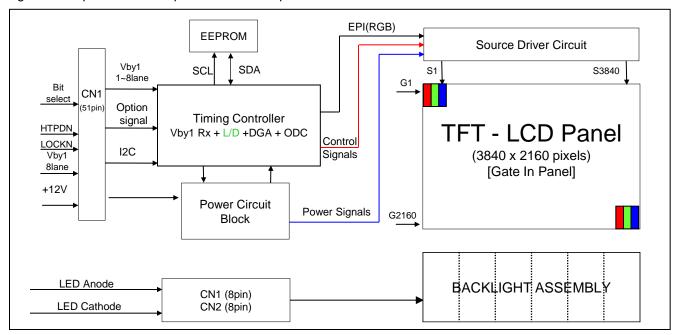

General Features

64.53 inches(1639.062mm) diagonal
1452.2(H) X 830.0(V) X 13.5(D)
0.372 mm x 0.372 mm
3840 horiz. by 2160 vert. Pixels.
10bit(D), 1.07Billon colors
500cd/m² (Center 1point ,Typ.)
Viewing angle free (R/L 178 (Min.), U/D 178 (Min.))
Total 117.94 W (Typ.) [Logic= 15.84 W (Typ.), BLU=102.1W (IF_cathode=95mA)
21.5kg(Typ.) , 22.6kg(Max.)
Transmissive mode, Normally black
Hard coating(2H), Anti-glare treatment of the front polarizer (Haze 28%(Typ.))
Landscape and Portrait Enabled (counter clock wised)

2. Absolute Maximum Ratings


The following items are maximum values which, if exceeded, may cause faulty operation or permanent damage to the LCD module.

Table 1. ABSOLUTE MAXIMUM RATINGS

Para	Symbol	Va	lue	Unit	Note	
Faia	Syllibol	Min	Max	o iii	Note	
Power Input Voltage	LCD Circuit	VLCD	-0.3	+14.0	VDC	
LED Input Voltage	Forward Voltage	VF	-	198	VDC	1
T-Con Option Selection Voltage		VLOGIC	-0.3	+4.0	VDC	
Operating Temperature	Operating Temperature		0	+50	°C	2.2
Storage Temperature		Тѕт	-20	+60	°C	2,3
Panel Front Temperature		Tsur	-	+68	°C	4
Operating Ambient Humidity		Нор	10	90	%RH	0.0
Storage Humidity		Нѕт	5	90	%RH	2,3

Notes 1. Ambient temperature condition (Ta = 25 ± 2 °C)

- 2. Temperature and relative humidity range are shown in the figure below. Wet bulb temperature should be Max 39°C, and no condensation of water.
- 3. Gravity mura can be guaranteed below 40°C condition.
- 4. The maximum operating temperatures is based on the test condition that the surface temperature of display area is less than or equal to 68°C with LCD module alone in a temperature controlled chamber. Thermal management should be considered in final product design to prevent the surface temperature of display area from being over 68°C. The range of operating temperature may be degraded in case of improper thermal management in final product design.

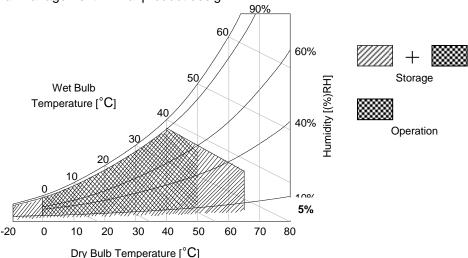

Ver. 1.0 5 / 33

3. Electrical Specifications

3-1. Electrical Characteristics

It requires two power inputs. One is employed to power for the LCD circuit. The other Is used for the LED backlight and LED Driver circuit.


Table 2. ELECTRICAL CHARACTERISTICS

Poromotor		Symbol		Value	Unit	Note	
Fala	Parameter			Тур	Max	Onit	Note
Circuit :		-					
Power Input Voltage	;	VLCD	10.8	12.0	13.2	VDC	
Davisar Immyd Cymraed	B 1 .0 .		-	1320	1720	mA	1
Power Input Current		ILCD	-	2100	2730	mA	2
T-CON Option	Input High Voltage	V _{IH}	2.7	-	3.6	VDC	
Selection Voltage	Input Low Voltage	V _{IL}	0	-	0.7	VDC	
Power Consumption		Dian	-	15.84	20.59	Watt	1
		PLCD	-	25.2	32.76	Watt	2
Rush current	Rush current		-	-	10.0	А	3


notes

- 1. The specified current and power consumption are under the V_{LCD} =12.0V, Ta=25 \pm 2°C, f_V =60Hz condition, and mosaic pattern(8 x 6) is displayed and f_V is the frame frequency.
- 2. The current is specified at the maximum current pattern.
- 3. The duration of rush current is about 2ms and rising time of power input is 0.5ms (min.).
- 4. Ripple voltage level is recommended under $\pm 5\%$ of typical voltage

White: 1023 Gray Black: 0 Gray



Mosaic Pattern(8 x 6)



Max Current Pattern

Ver. 1.0 6 / 33

Table 3. ELECTRICAL CHARACTERISTICS (Continue)

Ta = 25 ± 2 °C, On Duty 100%

Table 3. ELECTRICAL CHARACTERISTICS (Continue)								
Parameter		Symbol	Values			Unit	Note	
		Symbol	Min Typ		Max	Oille	Note	
Backlight Assem	bly :			•				
Forward Current	Anode	I _{F (anode)}		285		mAdc	0.0	
(one array)	Cathode	I _{F (cathode)}	90.2	95	99.7	mAdc	2, 3	
Forward Voltage		V _F	170	179	188	Vdc	4	
Forward Voltage V	ariation	$\triangle V_{F}$			1.7	Vdc	5	
Power Consumption	on	P _{BL}	-	102.1	-		6	
Burst Dimming Duty		On duty	1		100	%		
Burst Dimming Frequency		1/T	95		182	Hz	8	
LED Array : (APP	ENDIX-V)	<u> </u>						
Life Time			30,000	50,000		Hrs	7	


Notes: The design of the LED driver must have specifications for the LED array in LCD Assembly.

The electrical characteristics of LED driver are based on Constant Current driving type.

The performance of the LED in LCM, for example life time or brightness, is extremely influenced by the characteristics of the LED Driver. So, all the parameters of an LED driver should be carefully designed. When you design or order the LED driver, please make sure unwanted lighting caused by the mismatch of the LED and the driver (no lighting, flicker, etc) has never been occurred. When you confirm it, the LCD—

Assembly should be operated in the same condition as installed in your instrument.

- 1. Electrical characteristics are based on LED Array specification.
- 2. Specified values are defined for a Backlight Assembly. (IBL :2 LED array/LCM)
 Electrical characteristics are determined after the unit has been 'On' and stable for approximately 60min at 25±2°C. The specified temperature, optical and power consumption are under the typical supply input voltage, current & VBR (duty : 100%), it is total power consumption.
- Each LED array has one anode terminal and three cathode terminals.
 The forward current(IF) of the anode terminal is 285mA and it supplies 95mA into an one strings, respectively

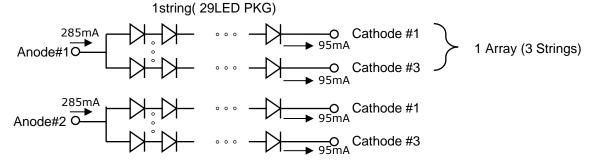

- 4. The forward voltage(V_F) of LED array depends on ambient temperature (Appendix-V)
- 5. ΔV_F means Max V_F -Min V_F in one Backlight. So V_F variation in a Backlight isn't over Max. 1.7V based on duty 100%
- 6. Maximum level of power consumption is measured at initial turn on. Typical level of power consumption is measured after 1hrs aging at $25 \pm 2^{\circ}$ C.
- 7. The life time is determined as the time at which brightness of the LED is 50% compared to that of initial value at the typical LED current on condition of continuous operating at 25 \pm 2°C, based on duty 100%.
- The reference method of burst dimming duty ratio.
 It is recommended to use synchronous V-sync frequency to prevent waterfall (Vsync * 1 =Burst Frequency)

Though PWM frequency is over 182Hz (max252Hz), function of backlight is not affected.

3-2. Interface Connections

This LCD module employs three kinds of interface connection, 51-pin connector is used for the module electronics and 8-pin, 8-pin connectors are used for the integral backlight system.

3-2-1. LCD Module

- LCD Connector(CN1): FI-RE51S-HF (manufactured by JAE)
GT05P-51S-H38 (manufactured by LSM)
IS050-C51B-C39-C (manufactured by UJU)

Table 4. MODULE CONNECTOR(CN1) PIN CONFIGURATION

No	Symbol	Description	No	Symbol	Description
1	VLCD	Power Supply +12.0V	27	GND	Ground
2	VLCD	Power Supply +12.0V	28	Rx0n	V-by-One HS Data Lane 0
3	VLCD	Power Supply +12.0V	29	Rx0p	V-by-One HS Data Lane 0
4	VLCD	Power Supply +12.0V	30	GND	Ground
5	VLCD	Power Supply +12.0V	31	Rx1n	V-by-One HS Data Lane 1
6	VLCD	Power Supply +12.0V	32	Rx1p	V-by-One HS Data Lane 1
7	VLCD	Power Supply +12.0V	33	GND	Ground
8	VLCD	Power Supply +12.0V	34	Rx2n	V-by-One HS Data Lane 2
9	NC	NO CONNECTION	35	Rx2p	V-by-One HS Data Lane 2
10	GND	Ground	36	GND	Ground
11	GND	Ground	37	Rx3n	V-by-One HS Data Lane 3
12	GND	Ground	38	Rx3p	V-by-One HS Data Lane 3
13	GND	Ground	39	GND	Ground
14	PWM TIN	External VBR (From System)	40	Rx4n	V-by-One HS Data Lane 4
15	PWM TOUT	External VBR (For System)	41	Rx4p	V-by-One HS Data Lane 4
16	Input Mode	Vx1 Input Data Format 'L'=Non-Division , 'H'=2-Division	42	GND	Ground
17	NC	NO CONNECTION	43	Rx5n	V-by-One HS Data Lane 5
18	NC	NO CONNECTION	44	Rx5p	V-by-One HS Data Lane 5
19	NC	NO CONNECTION	45	GND	Ground
20	NC	NO CONNECTION	46	Rx6n	V-by-One HS Data Lane 6
21	Bit SEL	'H' = 10bit(D) , 'L' = 8bit	47	Rx6p	V-by-One HS Data Lane 6
22	LOCAL_ON	H' = Enable , 'L' or NC = Disable	48	GND	Ground
23	RBF	'H' : AGP 'L' : NSB (No signal Black)	49	Rx7n	V-by-One HS Data Lane 7
24	GND	Ground	50	Rx7p	V-by-One HS Data Lane 7
25	HTPDN	Hot plug detect	51	GND	Ground
26	LOCKN	Lock detect	-	-	-

Note

- 1. All GND (ground) pins should be connected together to the LCD module's metal frame.
- 2. All Input levels of V-by-One signals are based on the V-by-One-HS Standard Version 1.4
- 3. #9 & #16~#20 & #22 NC(No Connection): These pins are used only for LGD (Do not connect)
- 4. Specific pin No. #23 is used for "No signal detection" of system signal interface. It should be GND for NSB (No Signal Black) while the system interface signal is not. If this pin is "H", LCD Module displays AGP (Auto Generation Pattern).

Ver. 1.0 8 / 33

3-2-2. Backlight Module

[CN201]

[CN202]

1) LED Array assy Connector (Plug)

1) LED Array assy Connector (Plug)

: HS100-L08N-N62 (black color, manufactured by UJU) : HS100-L08N-N62-A (natural color, manufactured by UJU)

Pin No	R_CNT (8pin)	L_CNT (8pin)
Pic.	8763432 ₁	87654321
색상	Black	White
1	R1 Cathode	Anode_L
2	R2 Cathode	NC
3	R3 Cathode	NC
4	NC	NC
5	NC	NC
6	NC	L3 Cathode
7	NC	L2 Cathode
8	Anode_R	L1 Cathode

Rear view of LCM



Ver. 1.0 9 / 33

3-3. Signal Timing Specifications

Table 6 shows the signal timing required at the input of the Vx1 transmitter. All of the interface signal timings should be satisfied with the following specification for normal operation.

Table 6. TIMING TABLE (DE Only Mode)

ITE	ITEM		Min	Тур	Max	Unit	Note
	Display Period	t HV	480	480	480	t clk	3840/8
Horizontal	Blank	t нв	60	70	120	t clk	1
	Total	t HP	540	550	600	t clk	
	Display Period	tvv	2160	2160	2160	Lines	
Vertical	Blank	t vB	40	90	600	Lines	1
	Total	t vp	2200	2250	2760	Lines	

ITE	ITEM		Min	Тур	Max	Unit	Note
	DCLK	fclk	67.00	74.25	78.00	MHz	594/8
Frequency	Horizontal	fн	121.8	135	140	KHz	2
	Vertical	f∨	47	60	63	Hz	2

- notes: 1. The input of HSYNC & VSYNC signal does not have an effect on normal operation (DE Only Mode). If you use spread spectrum of EMI, add some additional clock to minimum value for clock margin.
 - 2. The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rate and the horizontal frequency
 - 3. Spread Spectrum Rate (SSR) is limited to $\pm 0.5\%$ center spread at 30KHz
 - Timing should be set based on clock frequency.

Ver. 1.0

3-4. V by One input signal Characteristics

3-4-1. V by One Input Signal Timing Diagram

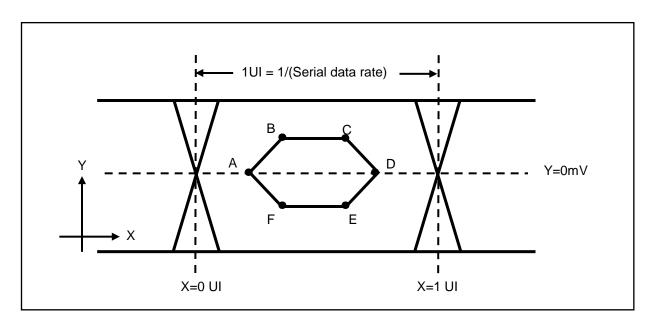


Table7. Eye Mask Specification

	X[UI]	Note	Y[mV]	Note
А	0.25 (max)	2	0	-
В	0.3 (max)	2	50	3
С	0.7(min)	3	50	3
D	0.75(min)	3	0	-
E	0.7(min)	3	I -50 I	3
F	0.3(max)	2	I -50 I	3


notes 1. All Input levels of V by One signals are based on the V by One HS Standard Ver. 1.4

- 2. This is allowable maximum value.
- 3. This is allowable minimum value.
- 4. The eye diagram is measured by the oscilloscope and receiver CDR characteristic must be emulated.

- PLL bandwidth : 15 Mhz - Damping Factor : 1.5

Ver. 1.0 11 / 33

3-4-2. V by One Input Signal Characteristics

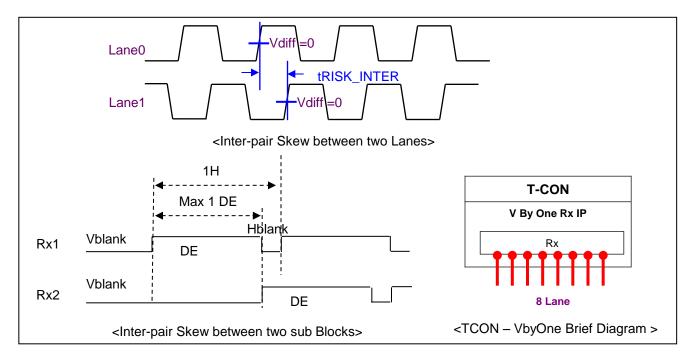

Description	Symbol	Min	Max	Unit	notes
Allowable inter-pair skew between lanes	tRISK_INTER	-	5	UI	1,2

Notes 1.1UI = 1/serial data rate

2. it is the time difference of the differential voltage between any two lanes in one sub block.

Ver. 1.0 12 / 33

3-5. Color Data Reference

The brightness of each primary color (red, green, blue) is based on the 10bit or 8bit gray scale data input for the color. The higher binary input, the brighter the color. Table 5 provides a reference for color versus data input.

Table 8. COLOR DATA REFERENCE

	Packer input & Unpacker output	30bpp RGB (10bit)	24bpp RGB (8bit)
	D[0]	R[2]	R[0]
	D[1]	R[3]	R[1]
	D[2]	R[4]	R[2]
Byte0	D[3]	R[5]	R[3]
Byteo	D[4]	R[6]	R[4]
	D[5]	R[7]	R[5]
	D[6]	R[8]	R[6]
	D[7]	R[9]	R[7]
	D[8]	G[2]	G[0]
	D[9]	G[3]	G[1]
	D[10]	G[4]	G[2]
Byte1	D[11]	G[5]	G[3]
Byter	D[12]	G[6]	G[4]
	D[13]	G[7]	G[5]
	D[14]	G[8]	G[6]
	D[15]	G[9]	G[7]
	D[16]	B[2]	B[0]
	D[17]	B[3]	B[1]
	D[18]	B[4]	B[2]
D. do O	D[19]	B[5]	B[3]
Byte2	D[20]	B[6]	B[4]
	D[21]	B[7]	B[5]
	D[22]	B[8]	B[6]
	D[23]	B[9]	B[7]
	D[24]	Don't care	
	D[25]	Don't care	
	D[26]	B[0]	
D. (- O	D[27]	B[1]	
Byte3	D[28]	G[0]	
	D[29]	G[1]	
	D[30]	R[0]	
	D[31]	R[1]	

Ver. 1.0

3-6. Power Sequence

3-6-1. LCD Driving circuit

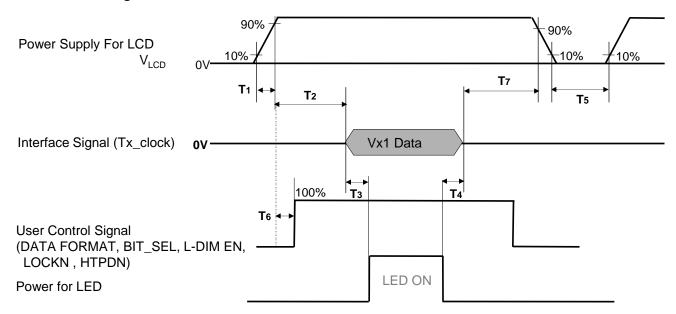


Table 9. POWER SEQUENCE

Dovementor		l lait	Natas		
Parameter	Min	Тур	Max	Unit	Notes
T1	0.5	-	20	ms	1
T2	0	-	-	ms	2
T3	400	-	-	ms	3
T4	100	-	-	ms	3
T5	3.0	-	-	s	4
T6	0	-	T2	ms	5
Т7	0	-	-	ms	6

Note:

- 1. Even though T1 is over the specified value, there is no problem if I2T spec of fuse is satisfied.
- 2. If T2 is satisfied with specification after removing V by One Cable, there is no problem.
- 3. The T3 / T4 is recommended value, the case when failed to meet a minimum specification, abnormal display would be shown. There is no reliability problem.
- 4. T5 should be measured after the Module has been fully discharged between power off and on period.
- 5. If the on time of signals (Interface signal and user control signals) precedes the on time of Power (V_{LCD}), it will be happened abnormal display. When T6 is NC status, T6 doesn't need to be measured.
- 6. It is recommendation specification that T7 has to be 0ms as a minimum value.
- Please avoid floating state of interface signal at invalid period.
- When the power supply for LCD (VLCD) is off, be sure to pull down the valid and invalid data to 0V.

Ver. 1.0 14 / 33

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable in a dark environment at $25\pm2^{\circ}$ C. The values are specified at distance 50cm from the LCD surface at a viewing angle of Φ and θ equal to 0 °. FIG. 1 shows additional information concerning the measurement equipment and method.

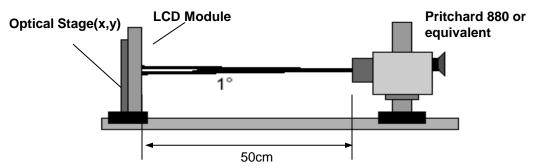


FIG. 1 Optical Characteristic Measurement Equipment and Method

 $\textbf{Table 10. OPTICAL CHARACTERISTICS} \quad \text{$T_{a=25\pm2}^{\circ}$C, V_{LCD}=$12.0V, f_{V}=$120Hz, $Dclk$=$74.25MHz, \textbf{EXTV}BR-B =100% and T_{LCD}=$12.0V, T_{V}=$120Hz, T_{V}=$120Hz,$

Barranadan			Symbol						
	Parame	eter	Sym	IDOI	Min	Тур	Max	Unit	Note
Contrast Ratio		С	R	800	1100	-		1	
Surface L	uminance, v	white	L _{WH}	2D	400	500	-	cd/m ²	2
Luminanc	e Variation		δ _{WHITE}	9P	65	-	-	%	3
D	T:	Gray to Gray	G to			8	12	ms	
Response	ime	Uniformity	δ _G	To G	-	-	1		4
		DED	R	х		0.648			
		RED	R	.y		0.332	İ		
		00551	Gx]	0.314	Ì		
Color Coo	rdinates	GREEN	G	iy	Тур	0.610	Тур		
[CIE1931]		BLUE	Bx		-0.03	0.153	+0.03		
			В	У	ĺ	0.057			
		WHITE	W	/x	ĺ	0.279			
			W	/y	ĺ	0.292			
Color Tem	perature					10,000		К	
Color Gam	nut					68		%	
		right(φ=0°)	θr (x	axis)	89	-	-	ĺ	ĺ
Viewing	2D	left (φ=180°)	θI (x axis)	89	-	-]	5	
Angle (CR>10)	(CR>10)	up (φ=90°)	θи (у	axis)	89	-	-	degree	5
		down (φ=270°)	θ d (y	axis)	89	-	-		
Gray Scal	е				-	-	-		6

Ver. 1.0 15 / 33

notes :1. Contrast Ratio(CR) is defined mathematically as :

Contrast Ratio = Surface Luminance with all white pixels

Surface Luminance with all black pixels

It is measured at center 1-point.

- 2. Optical Characteristics is determined after the unit has been 'ON' and 1 Hour after lighting the backlight in a dark environment at $25\pm2^{\circ}$ C. Surface luminance is the luminance value at center 1-point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see the FIG. 2
- 3. The variation in surface luminance , δ WHITE is defined as : δ WHITE(9P) = Minimum ($L_{on1}, L_{on2} \sim L_{on8}, L_{on9}$) / Maximum ($L_{on1}, L_{on2} \sim L_{on8}, L_{on9}$)*100 Where L_{on1} to L_{on9} are the luminance with all pixels displaying white at 9 locations. For more information, see the FIG. 2.


Photo Detector: RD-80S / Field: 2°

- 5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD module surface. For more information, see the FIG. 5.
- 6. Gray scale specification
 Gamma Value is approximately 2.2. For more information, see the Table 12.

Table 12. GRAY SCALE SPECIFICATION

Gray Level	Luminance [%] (Typ)
L0	0.083
L63	0.27
L127	1.04
L191	2.49
L255	4.68
L319	7.66
L383	11.5
L447	16.1
L511	21.6
L575	28.1
L639	35.4
L703	43.7
L767	53.0
L831	63.2
L895	74.5
L959	86.7
L1023	100

Measuring point for surface luminance & measuring point for luminance variation.

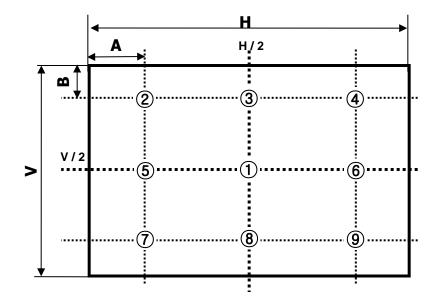

A:H/9 mm B:V/9 mm

@ H,V : Active Area

FIG. 2 9 Points for Luminance Measure

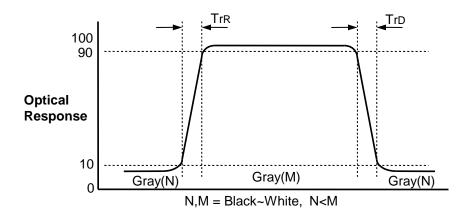


FIG. 3 Response Time

Ver. 1.0 17 / 33

Dimension of viewing angle range

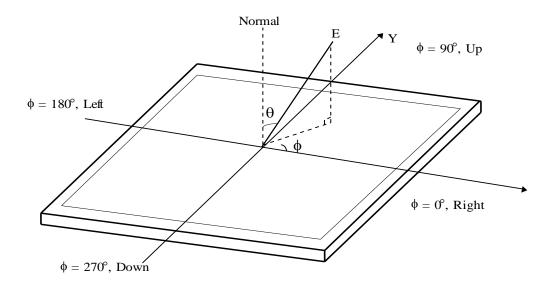


FIG. 4 Viewing Angle

Ver. 1.0 18 / 33

5. Mechanical Characteristics

Table 9 provides general mechanical characteristics.


Table 13. MECHANICAL CHARACTERISTICS


Item	Value	3	
	Horizontal	1452.2 mm	
Outline Dimension	Vertical	830.0 mm	
	Depth	13.5 mm	
Daniel Arra	Horizontal	1433.4 mm	
Bezel Area	Vertical	808.6 mm	
Active Display Avec	Horizontal	1428.48 mm	
Active Display Area	Vertical	803.52 mm	
Weight	21.5kg(Typ.) , 22.6kg(Max.)		
Cone Ton	Material	EGI, PCM	
Case Top	Case Top Color	Black	


Note: Please refer to a mechanic drawing in terms of tolerance at the next page.

Ver. 1.0

[FRONT VIEW]

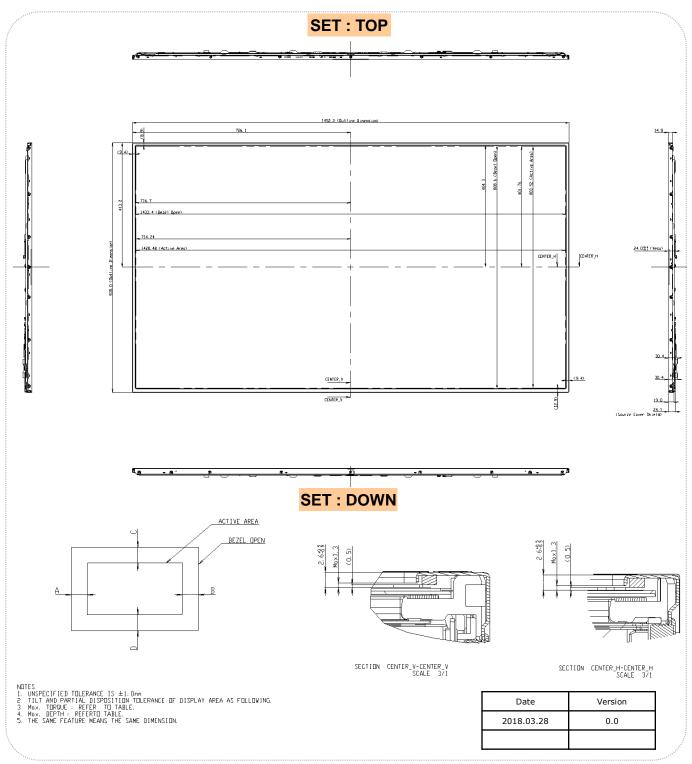

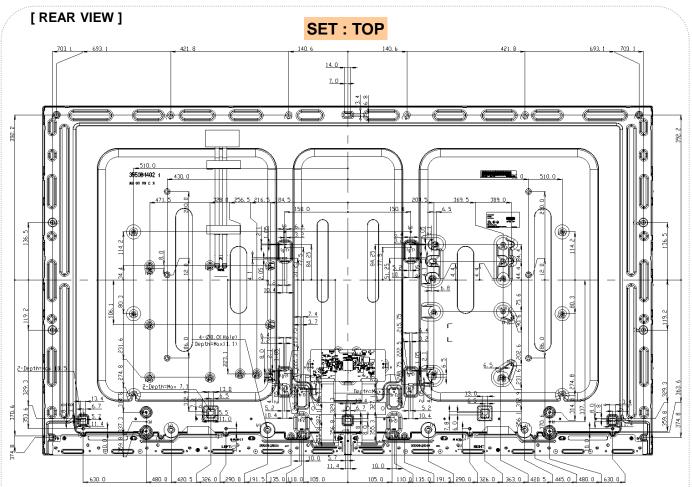

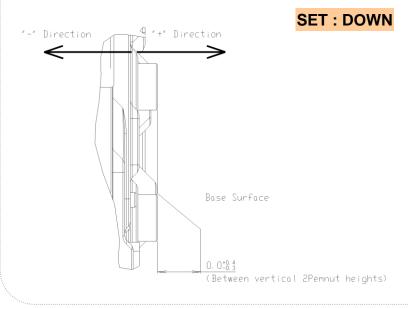

ITEM	TAP	Max Depth (mm)	Torque (kgf. cn)	Notes
(a)	M3. O	4. 8	Max 5. 0	Emboss
(b)	M3. 0	6. 8	Ma× 5.0	Emboss
c-1~2)	M4. O	8. 3	Max 8.0	Embass
ol-1~3)	M3. O	5. 0	Max 5.0	Emboss
(d-4)	M4. O	5. 0	Ma× 8. 0	Embass
-1~10)	M3. O	10. 3	Max 5.0	Embass
f-1~3)	M3. 0	4. 6	Ma× 5.0	Emboss
g-1~2)	M3. O	11. 0	Max 5. 0	Emboss
(g-3)	M4. O	11. 0	Ma× 8. 0	Emboss
h-1~2)	M3. 0	11. 1	Mo× 5. 0	Emboss
(i)	M3. O	2. 5	Ma× 5.0	Тар
j-1~2)	M3. O	8. 0	Ma× 5.0	Embass
(k)	M3. D	8. 0	Ma× 5.0	Emboss
(t)	M3. O	3. 5	Max 5.0	Embass
(m)	M3. O	8. 0	Ma× 5.0	Emboss
(n)	M3. O	8. 0	Ma× 5.0	Emboss
(m)	M3. O	8. 0	Ma× 5.0	Emboss
(0)	M3. O	Max 4.5 Top Section (2.2mm~4.5mm)	Ma× 5.0	Тар
(p)	M4. O	8. 0	Ma× 8. 0	Тар
(q)	M4. O	6. 5	Ma× 8. 0	Pen Nut
(r)	-	10. 6	-	Emboss
(5)	-	7. 6	-	Emboss
(t)	_	11. 0	-	Emboss

6. Reliability

Table 10. ENVIRONMENT TEST CONDITION

No.	Test Item	Condition
1	High temperature storage test	Ta= 60°C 90% 240h
2	Low temperature storage test	Ta= -20°C 240h
3	High temperature operation test	Ta= 50°C 50%RH 500h
4	Low temperature operation test	Ta= 0°C 500h
5	Humidity condition Operation	Ta= 40 °C ,90%RH
6	Altitude operating storage / shipment	0 - 16,400 ft 0 - 40,000 ft
7	Vibration test (non-operating)	Wave form : Random Vibration Level 0.5Grms Bandwidth : 10 ~ 300Hz Duration : X, Y, Z Each direction Per 10min
8	Shock test (non-operating)	Shock Level : 10 Grms Waveform : Half Sine Wave, 11ms Duration : X, Y, Z One time each direction
9	Panel Push Test (Module Condition)	Max 6kgf

notes: 1. Before and after Reliability test, LCM should be operated with normal function.

Ver. 1.0 22 / 33

7. International Standards

7-1. Safety

- a) UL 60065, Underwriters Laboratories Inc.
 - Audio, Video and Similar Electronic Apparatus Safety Requirements.
- b) CAN/CSA-C22.2 No. 60065-03, Canadian Standards Association. Audio, Video and Similar Electronic Apparatus Safety Requirements.
- c) EN 60065, European Committee for Electrotechnical Standardization (CENELEC).
 - Audio, Video and Similar Electronic Apparatus Safety Requirements.
- d) IEC 60065, The International Electrotechnical Commission (IEC).

 Audio, Video and Similar Electronic Apparatus Safety Requirements.

7-2. Environment

a) RoHS, Directive 2011/65/EU of the European Parliament and of the council of 8 June 2011

Ver. 1.0 23 / 33

8. Packing

8-1. Information of LCM Label

a) Lot Mark



A,B,C : SIZE(INCH) D : YEAR

E: MONTH $F \sim M$: SERIAL NO.

notes

1. YEAR

	Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
F	Mark	Α	В	С	D	Е	F	G	Н	J	K

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	Α	В	C

b) Location of Lot Mark

Serial NO. is printed on the label. The label is attached to the backside of the LCD module. This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one Pallet: 18 pcs

b) Pallet Size: 1700 mm(W) X 1140 mm(D) X 1090 mm(H)

Ver. 1.0 24 / 33

9. Precautions

Please pay attention to the followings when you use this TFT LCD module.

9-1. Mounting Precautions

- (1) You must mount a module using specified mounting holes (Details refer to the drawings).
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress, Concentrated stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzine. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. Operating Precautions

- (1) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (2) Brightness depends on the temperature. (In lower temperature, it becomes lower.)

 And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer
- (3) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (4) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (5) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- (6) Please do not give any mechanical and/or acoustical impact to LCM. Otherwise, LCM can't be operated its full characteristics perfectly.
- (7) A screw which is fastened up the steels should be a machine screw. (if not, it can causes conductive particles and deal LCM a fatal blow)
- (8) Please do not set LCD on its edge.
- (9) The conductive material and signal cables are kept away from LED driver inductor to prevent abnormal display, sound noise and temperature rising.

Ver. 1.0 25 / 33

9-3. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. Precautions for Strong Light Exposure

Strong light exposure causes degradation of polarizer and color filter.

9-5. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.

 It is recommended that they be stored in the container in which they were shipped.
- (3) Storage condition is guaranteed under packing conditions.
- (4) The phase transition of Liquid Crystal in the condition of the low or high storage temperature will be recovered when the LCD module returns to the normal condition.

9-6. Handling Precautions for Protection Film

- (1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Ver. 1.0 26 / 33

9-7. Appropriate Condition for Commercial Display

- Generally large-sized LCD modules are designed for consumer applications (TV).
 Accordingly, a long-term display like in Commercial Display application, can cause uneven display including image sticking. To optimize module's lifetime and function, several operating usages are required.
- 1. Normal operating condition
 - Temperature: 0 ~ 40 °C
 - Operating Ambient Humidity: 10 ~ 90 %
 - Display pattern: dynamic pattern (Real display)


Note) Long-term static display can cause image sticking.


- 2. Operating usages under abnormal condition
 - a. Ambient condition
 - Well-ventilated place is recommended to set up Commercial Display system.
 - b. Power and screen save
 - Periodical power-off or screen save is needed after long-term display.
- 3. Operating usages to protect against image sticking due to long-term static display
- a. Suitable operating time: under 24 hours a day.
 - (* The moving picture can be allowed for 24 hours a day)
- b. Static information display recommended to use with moving image.
- Cycling display between 5 minutes' information(static) display and 10 seconds' moving image.
- c. Background and character (image) color change
 - Use different colors for background and character, respectively.
 - Change colors themselves periodically.
- d. Avoid combination of background and character with large different luminance.
- 1) Abnormal condition just means conditions except normal condition.
- 2) Black image or moving image is strongly recommended as a screen save.
- 4. Lifetime in this spec. is guaranteed only when Commercial Display is used according to operating usages.
- 5. Module should be turned counter-clockwise based on front view when used in portrait mode.

Ver. 1.0 27 / 33

APPENDIX- I

■ Pallet Ass'y

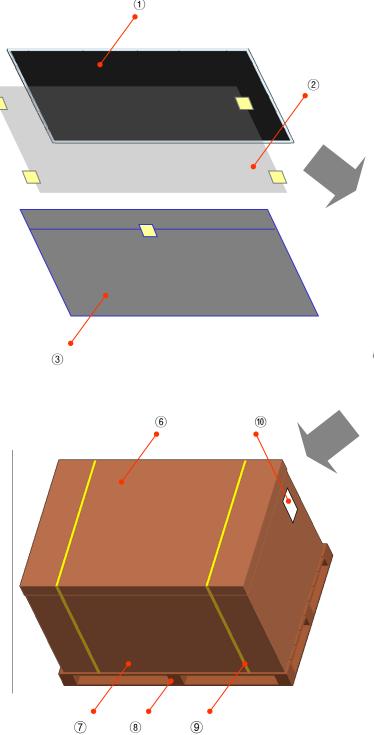



No.	Description	Material		
1	Module	-		
(2)	Protect Film	PE		
3	Bag	AL		
4	Packing.Top	EPS		
(5)	Packing.Bottom	EPS		
6	Angle Cover	Paper		
7	Angle Packing	Paper		
8	Pallet	Plywood		
9	Band	PP		
10	Label	Paper		

Ver. 1.0 28 / 33

APPENDIX- II-1

■ LCM Label



■ Production site

- LG Display (Guangzhou, Heesung) CO., LTD

notes 1. The origin of LCM Label will be changed according to the production site.

Ver. 1.0 29 / 33

APPENDIX- II-2


■ Pallet Label




Ver. 1.0 30 / 33

APPENDIX- III

■ Required signal assignment for Flat Link (Thine: THCV215) Transmitter

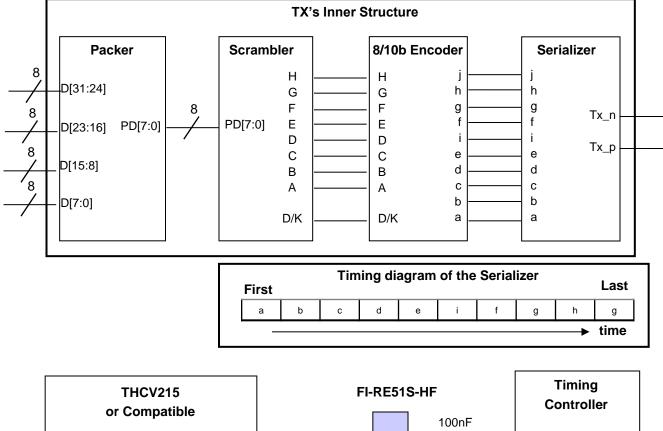

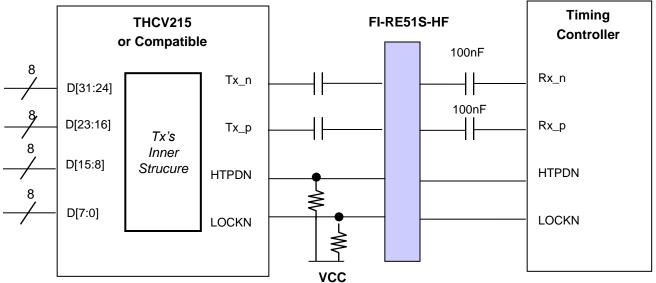

notes: 1. The LCD module uses a 100 nF capacitor on positive and negative lines of each receiver input.


- 2. Refer to Vx1 Transmitter Data Sheet for detail descriptions. (THCV215 or Compatible)
- 3. About Module connector pin configuration, Please refer to the Page 8~9.

Ver. 1.0 31 / 33


APPENDIX- IV

■ Option Pin Circuit Block Diagram

1) Circuit Block Diagram of Bit Selection pin

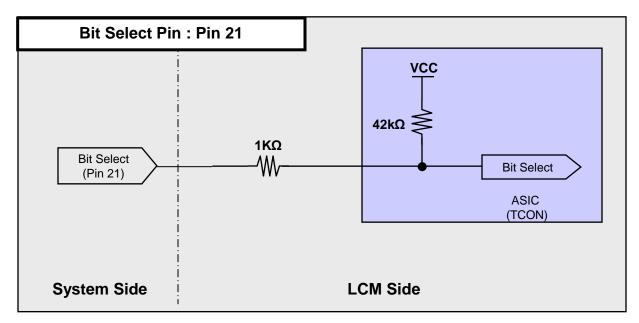

2) Circuit Block Diagram of AGP Selection pin

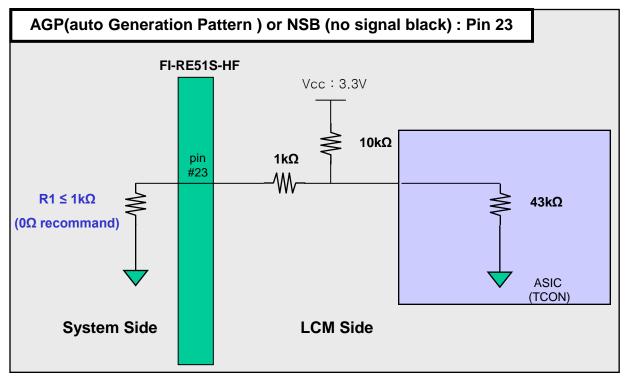


Ver. 1.0 32 / 33

APPENDIX- V


■ LED Array Electrical Spec

Item	Condition	Min	Тур	Max	Uint	Remark
Forward voltage(Vf)	lf=95mA	170	179	188	٧	Ta=25℃
△Vf*¹		-	-	1.7	V	

■ Forward Current vs. Forward Voltage

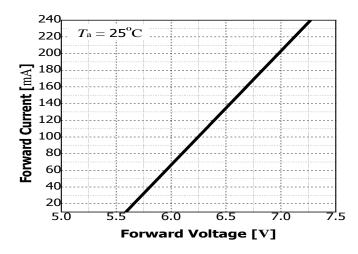


■ Ambient Temperature vs. Forward Voltage

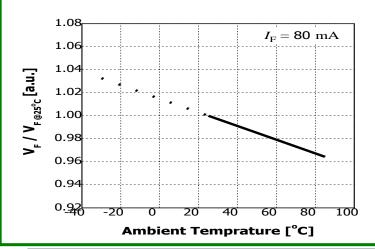


Ver. 1.0 33 / 33

APPENDIX- VI

■ input mode of pixel data





Lane	1 st Data	2 nd Data	Data#
Lane0	1	9	3833
Lane1	2	10	3834
Lane2	3	11	3835
Lane3	4	12	3836
Lane4	5	13	3837
Lane5	6	14	3838
Lane6	7	15	3839
Lane7	8	16	3840

Lane	1 st Data	2 nd Data	Data#	
Lane0	1	5	1917	
Lane1	2	6	1918	
Lane2	3	7	1919	
Lane3	4	8	1920	
Lane4	1921	1925	3837	
Lane5	1922	1926	3838	
Lane6	1923	1927	3839	
Lane7	1924	1928	3840	

Ver. 1.0 34 / 33