



Document Title	HSD070PFW1-A Tentative Product Information	Page No.	1/27
Document No.		Revision	

Date : Sep 24, 2010

HannStar Product Information **(Tentative)**

Model: HSD070PFW1
-A**

Note:

1. The information contained herein is preliminary and may be changed without prior notices.
2. Please contact HannStar Display Corp. before designing your product based on this module specification.
3. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by HannStar for any intellectual property claims or other problems that may result from application based on the module described herein.
4. The mark “**” of Model means sub-model code.



HannStar Display Corp.

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	2/27
Document No.		Revision	

Record of Revisions

Rev.	Date	Description of change
1.0	July 28, 2010	Product information was first released



Document Title	HSD070PFW1-A Tentative Product Information	Page No.	3/27
Document No.		Revision	

Contents

1.0	General description	p.4
2.0	Absolute maximum ratings	p.5
3.0	Optical characteristics	p.6
4.0	Block diagram	p.10
5.0	Interface pin connection	p.12
6.0	Electrical characteristics	p.14
7.0	Reliability test items	p.21
8.0	Outline dimension	p.22
9.0	Lot mark	p.24
10.0	Package specification	p.25
11.0	General Precaution	p.26

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	4/27
Document No.		Revision	

1.0 GENERAL DESCRIPTION

1.1 Introduction

HannStar Display model HSD070PFW1-A is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 7.0 (17:10) inch diagonally measured active display area with WSVGA (1024 horizontal by 600 vertical pixel) resolution.

1.2 Features

- 7 inch (17:10 diagonal) configuration
- 16.7M color by 6 bit+HFRC R.G.B signal input

1.3 Applications

- Mobile NB
- Digital Photo frame
- Display terminal for AV application

1.4 TFT LCD General information

Item	Specification	Unit
Outline Dimension	164.05 x 100.86 (typ)	mm
Display area	153.6(H) x 90(V)	mm
Number of Pixel	1024 RGB (H) x 600(V)	pixels
Pixel pitch	0.15(H) x 0.15(V)	mm
Pixel arrangement	RGB Vertical stripe	
Display mode	Normally white	
NTSC	50 (typ.) / 45 (min.)	%
Weight	(90) (Typ.)	g
Back-light	White LED	
Power Consumption	(0.85) (max.)/Logic (1.50) (max.)/BL	W

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	5/27
Document No.		Revision	

1.5 Mechanical Information

Item		Min.	Typ.	Max.	Unit	Remark
Module Size	Horizontal (H)	163.85	164.05	164.25	mm	
	Vertical (V)	100.66	100.86	101.06	mm	
	Depth (D)	2.2	2.35	2.5	mm	
Weight	—	(90)	—	g		

2.0 ABSOLUTE MAXIMUM RATINGS

2.1 Electrical Absolute Rating

2.1.1 TFT LCD Module

Item	Symbol	Min.	Max.	Unit	Note
LED Power Supply voltage	V_{LED}	-0.3	6.0	V	GND=0
Logic Supply voltage	V_{DD}	-0.3	6.0	V	

2.2 Environment Absolute Rating

Item	Symbol	Min.	Max.	Unit	Note
Operating Temperature	T_{opa}	-20	65	°C	
Storage Temperature	T_{stg}	-40	85	°C	

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	6/27
Document No.		Revision	

3.0 OPTICAL CHARACTERISTICS

3.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note	
Contrast		CR	$\Theta=0$ Normal viewing angle	600	800	—		(1)(2)(4)	
Response time		Tr		—	4	8	msec	(1)(3)	
		Tf		—	12	24			
White luminance (Center)		Y_L			240	300	—	cd/m ²	(1)(4)
Color chromaticity (CIE1931)	Red	R_x		(0.575)	(0.605)	(0.635)			
		R_y		(0.322)	(0.352)	(0.382)			
	Green	G_x		(0.279)	(0.309)	(0.339)			
		G_y		(0.507)	(0.537)	(0.567)			
	Blue	B_x		(0.119)	(0.149)	(0.179)			
		B_y		(0.081)	(0.111)	(0.141)			
	White	W_x	(0.285)	(0.310)	(0.335)		7000K \pm 1300, 0 \sim 40MPCD		
		W_y	(0.305)	(0.330)	(0.355)				
Viewing angle	Hor.	Θ_L	CR>10	70	80	—	(1)(4)		
		Θ_R		70	80	—			
	Ver.	Θ_U		70	80	—			
		Θ_D		60	70	—			
Brightness uniformity		B_{UNI}	$\Theta=0$ (9point)	80	85	—		(5)	
Optima View Direction		12 O' clock						(6)	

3.2 Measuring Condition


- Measuring surrounding : dark room
- Ambient temperature : 25 \pm 2°C
- 15min. warm-up time.

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	7/27
Document No.		Revision	

3.3 Measuring Equipment

- FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.
- Measuring spot size : 20 ~ 21 mm

Note (1) Definition of Viewing Angle:

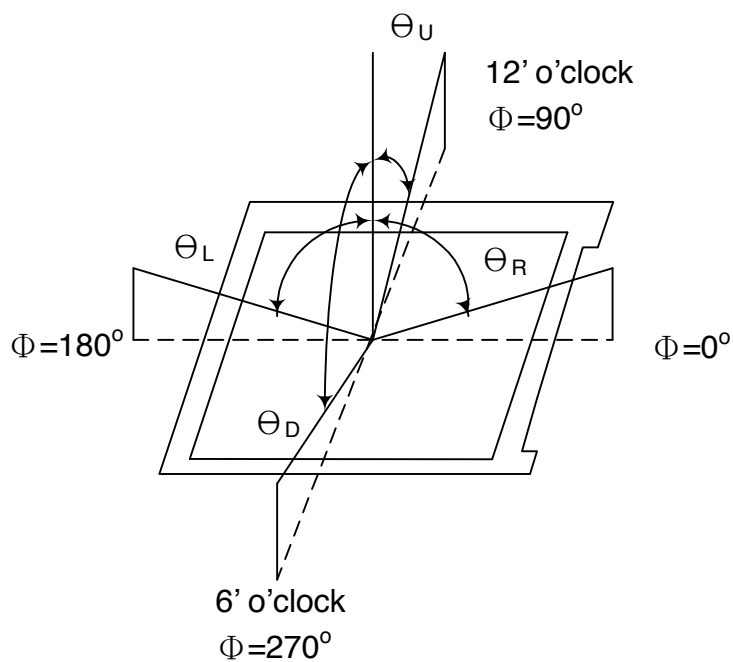


Note (2) Definition of Contrast Ratio (CR) :
measured at the center point of panel


$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	8/27
Document No.		Revision	

Note (3) Definition of Response Time : Sum of T_R and T_F

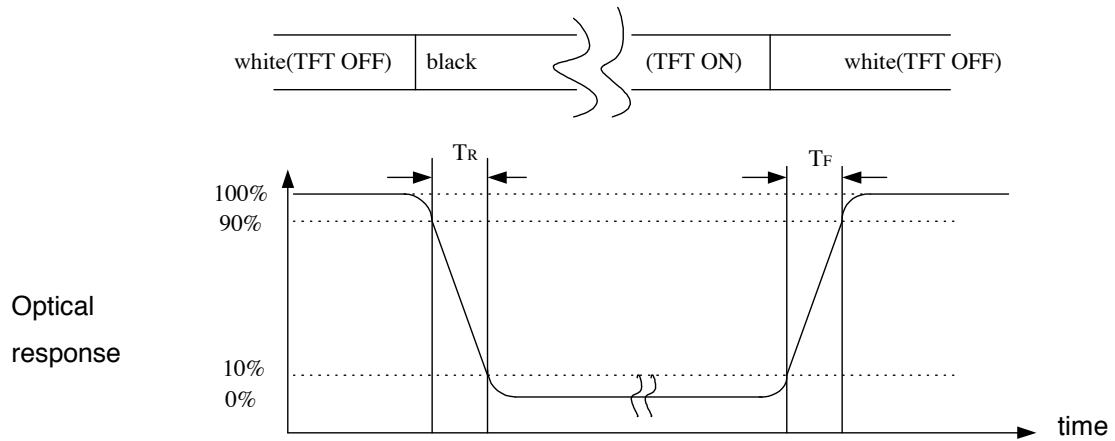


Note (4) Definition of optical measurement setup

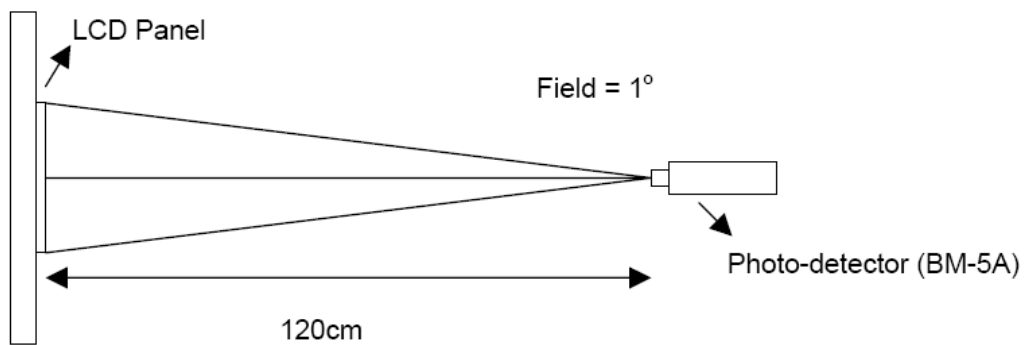

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	9/27
Document No.		Revision	

Note (5) Definition of Average Luminance Uniformity of White (Center)
 Definition of brightness uniformity

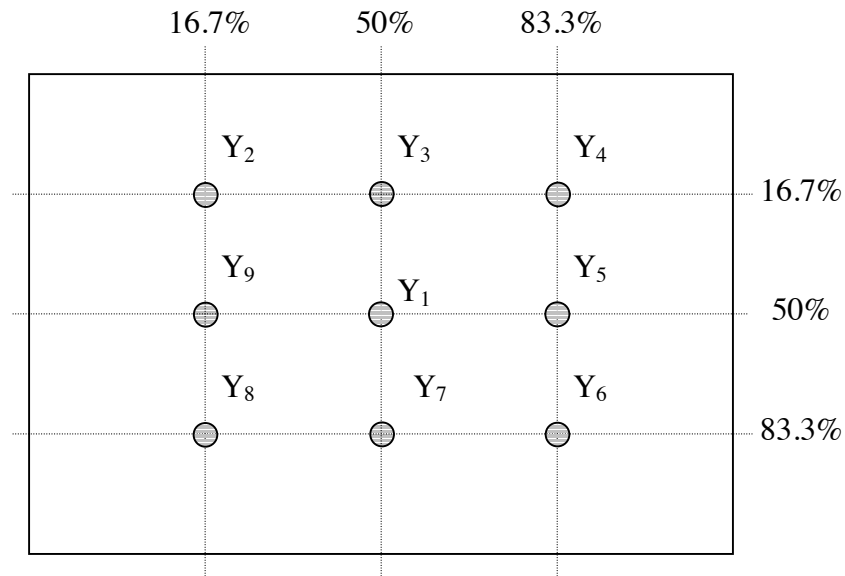


$$\text{Luminance uniformity} = \frac{(\text{Min Luminance of 9 points})}{(\text{Max Luminance of 9 points})}$$

Note (6) Rubbing Direction (The different Rubbing Direction will cause the different optimal view direction.)


Document Title	HSD070PFW1-A Tentative Product Information	Page No.	10/27
Document No.		Revision	

4.0 BLOCK DIAGRAM

4.1 TFT LCD Module:

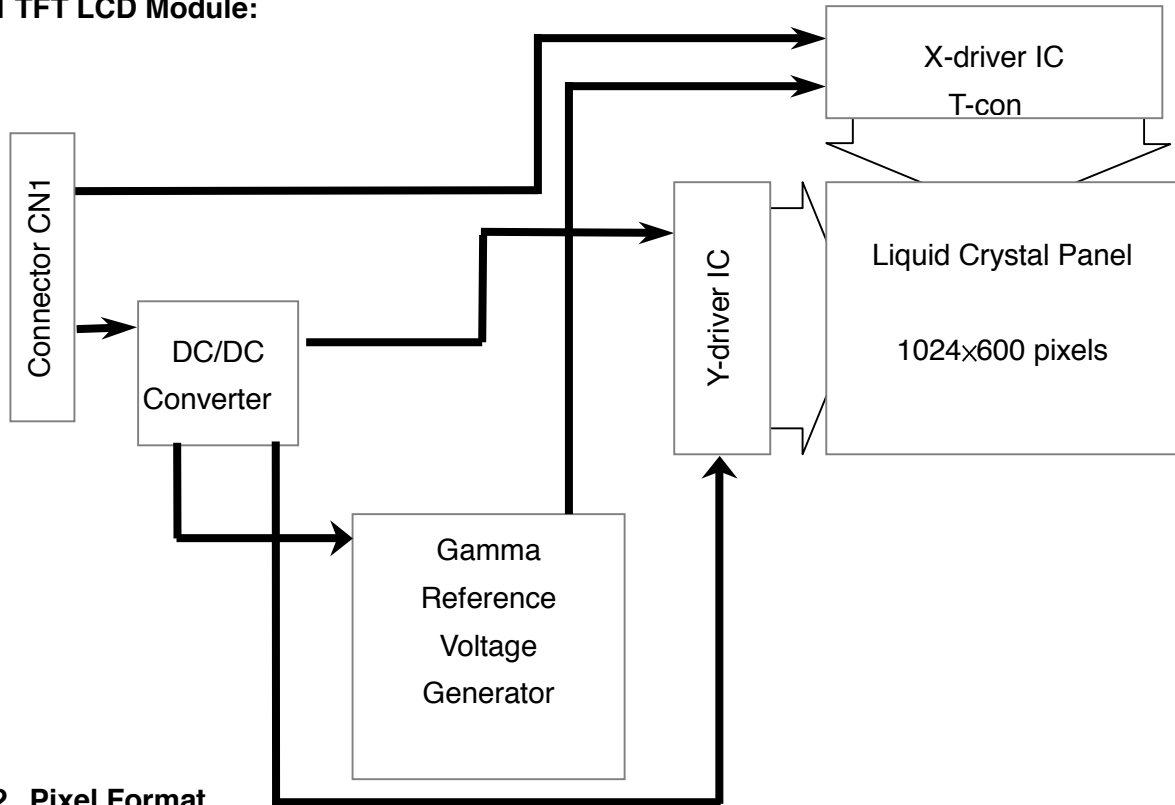

4.2 Pixel Format

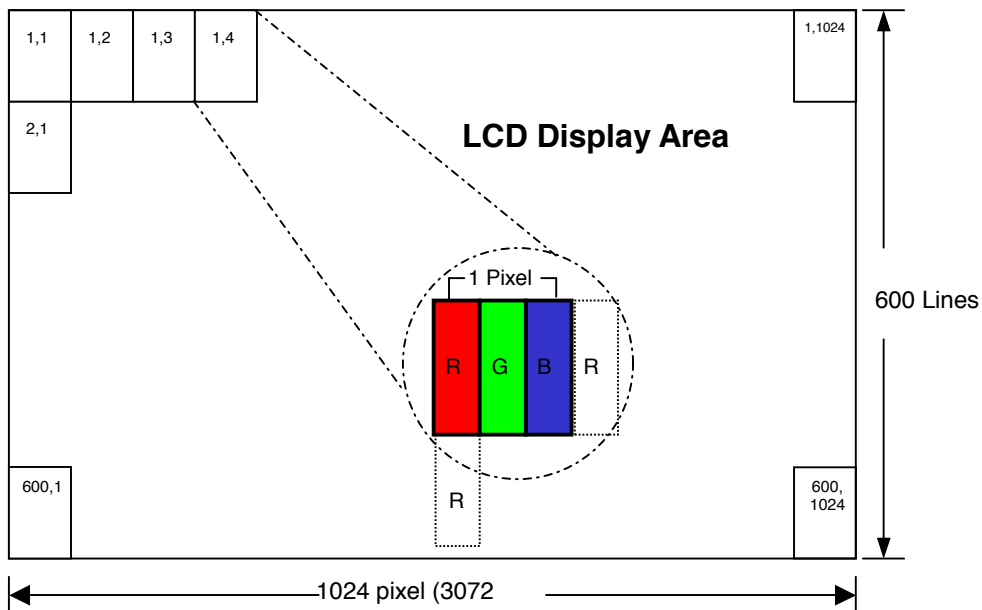

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	11/27
Document No.		Revision	

4.3 Relationship Between Displayed Color and Input

	Display	MSB				LSB				MSB				LSB				MSB				LSB				Gray scale Level
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0	
Basic color	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	-
	Green	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	-
	Light Blue	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-
	Red	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-
	Purple	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	-
	Yellow	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	-
	White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-
Gray scale of Red	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1
		L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251
		H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L252
	H	H	H	H	H	H	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L253	
	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L254	
	Red	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	Red L255	
Gray scale of Green	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L1
		L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251
		L	L	L	L	L	L	L	L	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L252	
	L	L	L	L	L	L	L	L	H	H	H	H	H	L	H	L	L	L	L	L	L	L	L	L253		
	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L254		
	Green	L	L	L	L	L	L	L	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	Green L255		
Gray scale of Blue	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L1
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	L	L	L	L252
	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	L	H	L	L253	
	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L254	
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	Blue L255	
Gray scale of White & Black	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0
	Dark ↑ ↓ Light	L	L	L	L	L	L	H	L	L	L	L	L	L	H	L	L	L	L	L	L	H	L	L1		
		L	L	L	L	L	H	L	L	L	L	L	H	L	L	L	L	L	L	H	L	L	L	L2		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	L3...L251	
		H	H	H	H	H	L	L	H	H	H	H	L	L	H	H	H	H	L	L	L	L	L252			
	H	H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	H	L	H	L	L	L253				
	H	H	H	H	H	H	L	H	H	H	H	H	L	H	H	H	H	H	L	L	L	L254				
	White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	White L255

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	12/27
Document No.		Revision	

5.0 INTERFACE PIN CONNECTION

TFT LCD Module : CN1 (Input signal): DDK FF12-31A-R12BN-D3 (or equivalent)


Pin	Signal	Description
1	V_BAT (4.2V~3.2V)	Power Supply, 4.2~3.2V
2	V_BAT (4.2V~3.2V)	Power Supply, 4.2~3.2V
3	V_BAT (4.2V~3.2V)	Power Supply, 4.2~3.2V
4	V_BAT (4.2V~3.2V)	Power Supply, 4.2~3.2V
5	V_BAT (4.2V~3.2V)	Power Supply, 4.2~3.2V
6	V_BAT (4.2V~3.2V)	Power Supply, 4.2~3.2V
7	V_BAT (4.2V~3.2V)	Power Supply, 4.2~3.2V
8	NC	NC
9	NC	NC
10	LDO_EN	Input Power Enable Pin
11	GND	Ground
12	GND	Ground
13	LXIN0N	-LVDS differential data input, Chan 0
14	LXIN0P	+LVDS differential data input, Chan 0
15	GND	Ground
16	LXIN1N	-LVDS differential data input, Chan 1
17	LXIN1P	+LVDS differential data input, Chan 1
18	GND	Ground
19	LXIN2N	-LVDS differential data input, Chan 2
20	LXIN2P	+LVDS differential data input, Chan 2
21	GND	Ground
22	LXCLKN	-LVDS Differential Clock input
23	LXCLKP	+LVDS Differential Clock input
24	GND	Ground
25	LXIN3N	-LVDS differential data input, Chan 3
26	LXIN3P	+LVDS differential data input, Chan 3
27	GND	Ground
28	LED_EN	Adjust for LED backlight brightness
29	GND	Ground
30	Signal	1V
31	GND	Ground

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	13/27
Document No.		Revision	

Note : The brightness of LCD panel could be changed by adjusting PWM


[Note]

(1) LED_EN can adjust brightness to control Pin. Pulse duty the bigger the brighter.

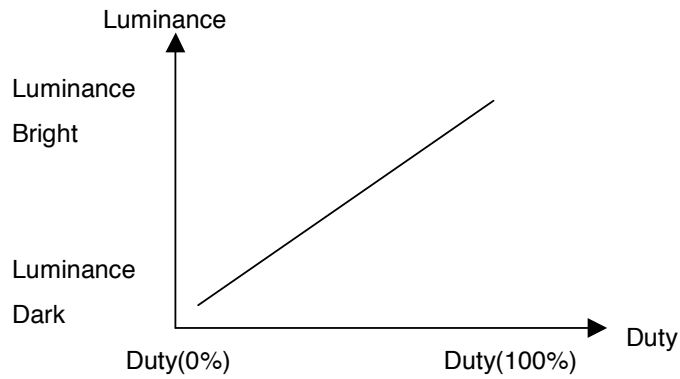

(2) LED_EN Signal=0~3.3V , Operation Conditions :

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
LED_EN Logic-High Level	V _{ADJH}		1.8	3.3	3.6	V
LED_EN Logic-Low Level	V _{ADJL}		0	0	0.4	V
Dimming Frequency	F _{ADJ}		18	20	22	kHz
Dimming Duty Cycle	D		20	--	100	%

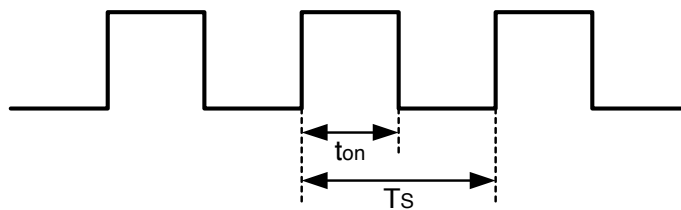

$$D = t_{on} / T_s \times 100\%$$

$$F_{ADJ} = 1 / T_s$$

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	14/27
Document No.		Revision	

6.0 ELECTRICAL CHARACTERISTICS


6.1 TFT LCD Module

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	V _{DD}	3.2	-	4.2	V	Note (1)
Current of power supply	IDD	-	TBD	-	A	V _{DD} = 3.3V Ta=25°C fv=60Hz Note (2)(3)
Inrush current	I _{RUSH}	-	-	1.50	A	Note (4)

Note : (1) V_{DD}-dip condition :

When VDD operating within $TBDV \leq VDD < 3.2V$, $td \leq 10ms$, the display may momentarily become abnormal .

VDD < TBDV, VDD dip condition should also follow the Power On/Off conditions for supply voltage.


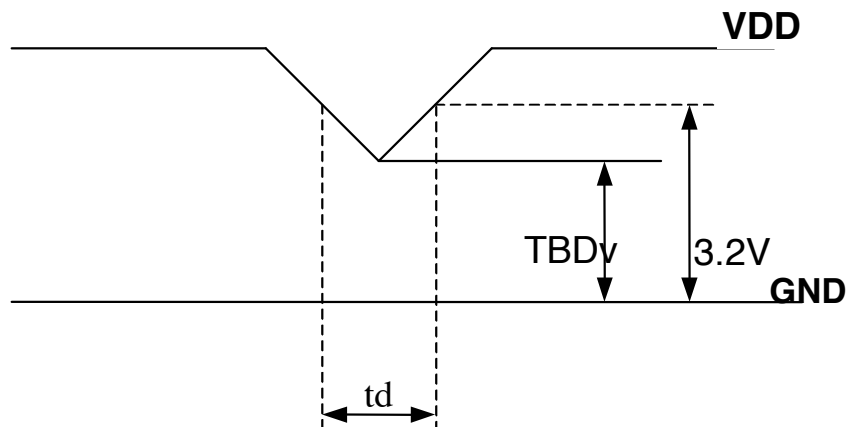


(2) Maximum Measurement Condition: Black Pattern

(3) Typical Measurement Condition: Mosaic Pattern

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	15/27
Document No.		Revision	

(4) Power on Inrush current test circuit

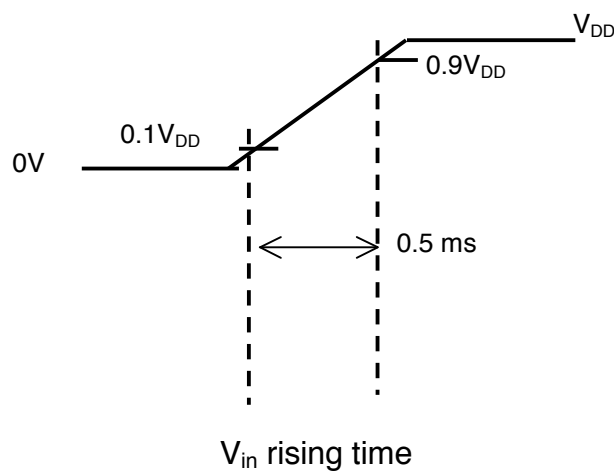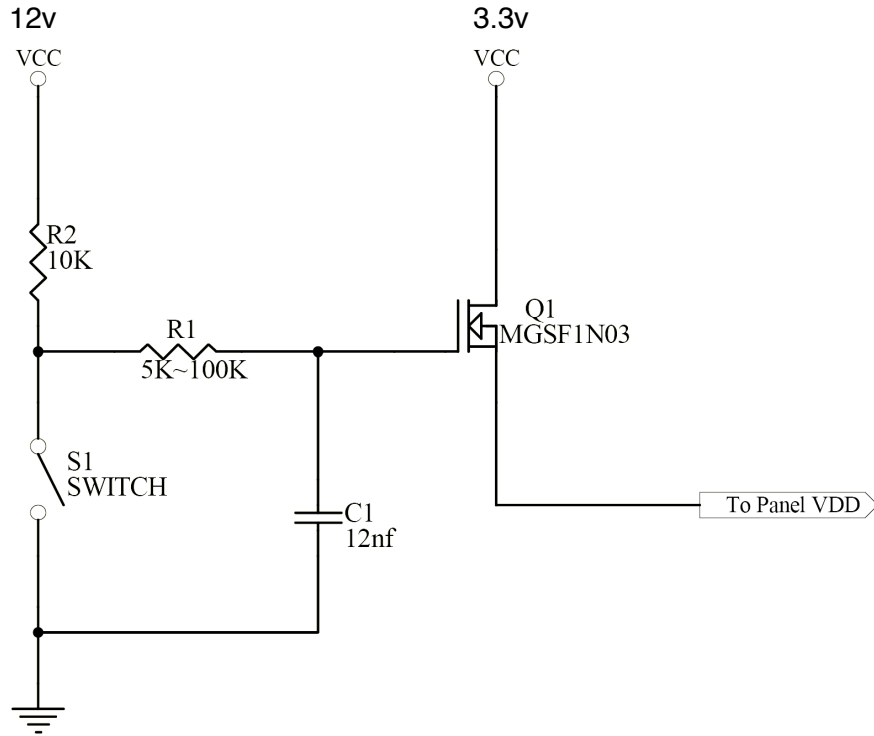


Document Title	HSD070PFW1-A Tentative Product Information	Page No.	16/27
Document No.		Revision	

6.2 Switching Characteristics for LVDS Receiver

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	V _{th}	—	—	100	mV	V _{CM} =1.2V
Differential Input Low Threshold	V _{tl}	-100	—	—	mV	
Input Current	I _{IN}	-10	—	+10	uA	
Differential input Voltage	V _{IDl}	0.1	—	0.6	V	
Common Mode Voltage Offset	V _{CM}	0.7	1.2	1.6	V	

6.3 8 Bit LVDS input (HSD="L")

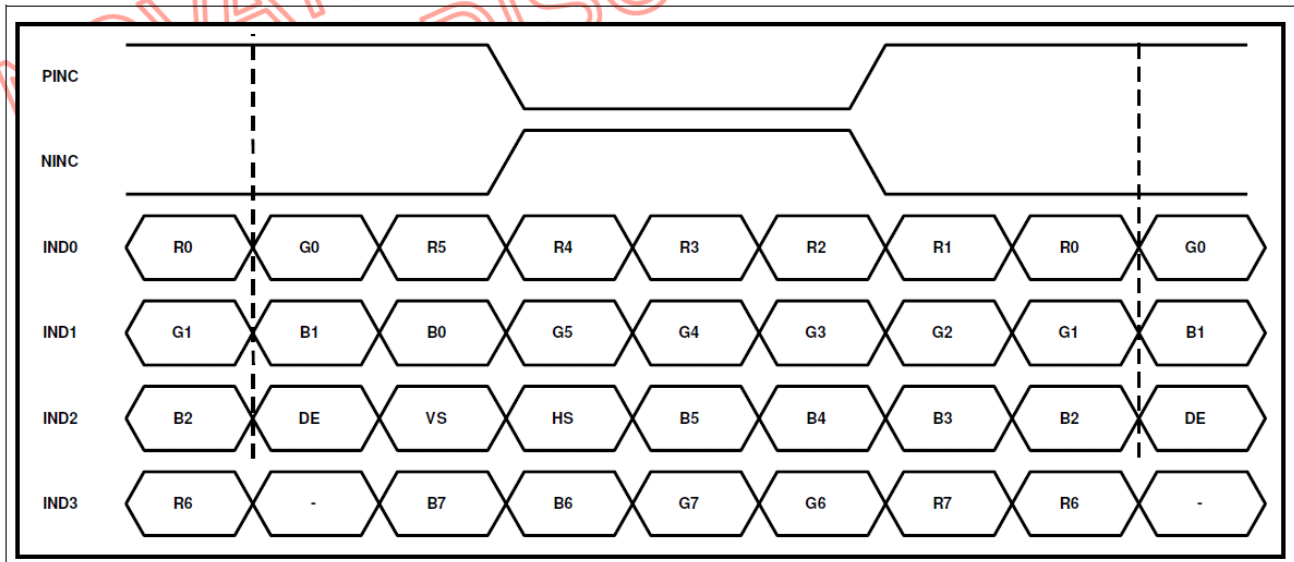


Document Title	HSD070PFW1-A Tentative Product Information	Page No.	17/27
Document No.		Revision	

6.4 Interface Timing (DE mode)


Item	Symbol	Min.	Typ.	Max.	Unit
Frame Rate	--	55	60	65	Hz
Frame Period	t1	612	625	638	line
Vertical Display Time	t2	600	600	600	line
Vertical Blanking Time	t3	12	25	38	line
1 Line Scanning Time	t4	1160	1200	1240	clock
Horizontal Display Time	t5	1024	1024	1024	clock
Horizontal Blanking Time	t6	136	176	216	clock
Clock Rate	t7	39	(45)	51.42	MHz

Timing Diagram of Interface Signal (DE mode)

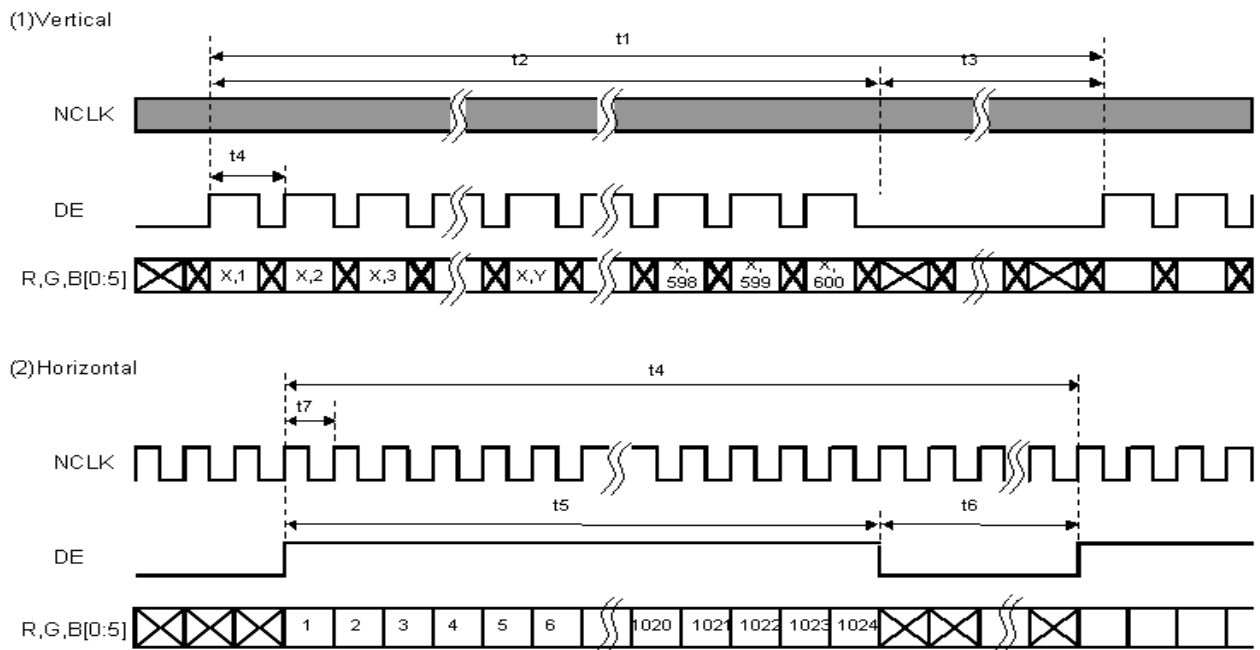

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	18/27
Document No.		Revision	

6.5 Power On / Off Sequence

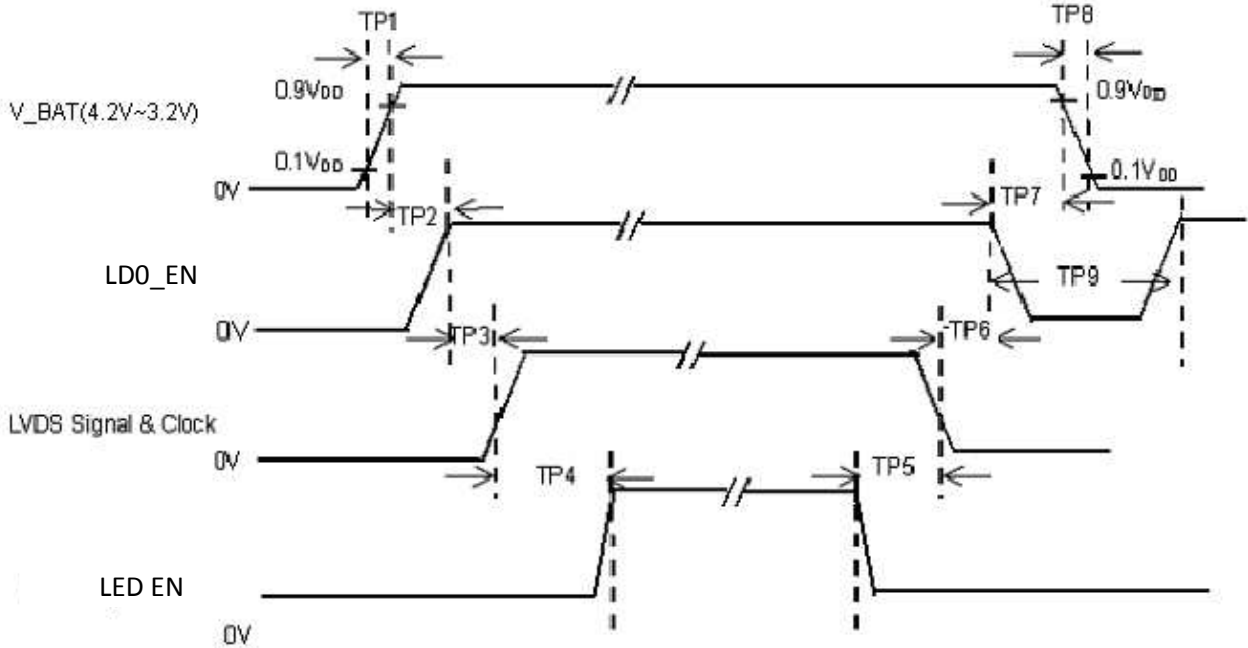

Item	Min.	Typ.	Max.	Unit	Remark
TP1	0.5	--	10	msec	
TP2	10	--	--	msec	
TP3	30	40	90	msec	
TP4	200	--	--	msec	
TP5	110	--	--	msec	
TP6	0	16	80	msec	
TP7	0	--	--	msec	Must exceed 0
TP8	--	10	30	msec	
TP9	1000	--	--	msec	

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	19/27
Document No.		Revision	

Note:(1) The supply voltage of the external system for the module input should be the same as the definition of V_{DD} .

- (2) Apply the lamp volatge within the LCD operation range. When the back-light turns on before the LCD operation or the LCD truns off before the back-light turns off, the display may momentarily become white.
- (3) In case of V_{DD} = off level, please keep the level of input signal on the low or keep a high impedance.
- (4) TP4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.


6.6 Backlight Unit

Parameter	Symbol	Min	Typ	Max	Units	Condition
LED Current	I_F	--	17.0	--	mA	$T_a=25^{\circ}C$
LED Voltage	V_F	3.2	3.3	3.5	Volt	$T_a=25^{\circ}C$
LED Power consumption	P_{LED}	--	1.178	--	Watt	$T_a=25^{\circ}C$ Note (1)
LED Life-Time	N/A	10,000	--	--	Hour	$T_a=25^{\circ}C$ $I_F=20mA$ Note (2)

Note (1): Calculator value for reference $P=I_F \times V_F \times N$ (LED Qty')

Note (2): The LED lifetime defines as the estimated time to 50% degradation of final luminous.

Note (3): LED Light Bar Circuit

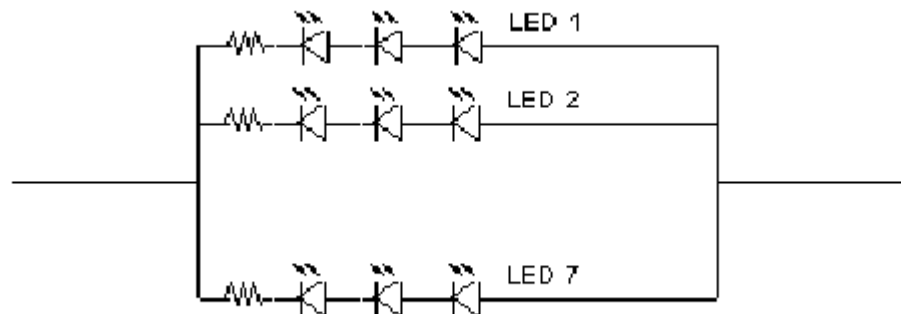

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	20/27
Document No.		Revision	

6.7 LED Driver

6.7.1 Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit	Note
LED Power Supply voltage	V_BAT	-0.3	6	Volt	
LED_EN Voltage	V _{EN} , LED_EN	-0.3	6	Volt	

6.7.2 DC Electrical Characteristics


Parameter	Symbol	Min	Typ	Max	Units	Remark
LED Power Supply Voltage	V_BAT	3.2	--	4.2	Volt	
LED_EN High Threshold	V _{LED_ENH}	1.4	--	V_BAT	Volt	
LED_EN Low Threshold	V _{LED_ENL}	--	--	0.5	Volt	

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	21/27
Document No.		Revision	

7.0 Reliability test items

No.	Item	Conditions	Remark
1	High Temperature Storage	Ta=+85°C, 240hrs	
2	Low Temperature Storage	Ta=-40°C, 240hrs	
3	High Temperature Operation	Ta=+65°C, 500hrs	
4	Low Temperature Operation	Ta=-20°C, 500hrs	
5	Thermal Cycling Test (non operation)	-20°C(30min)→+65°C(30min),100 cycles	
6	Vibration	Sine Wave 1.5G, 5~500Hz, XYZ 30min/each direction	
7	Shock	Half-Sine, 200G, 2ms, ±XYZ, 1time	

Storage / Operating temperature

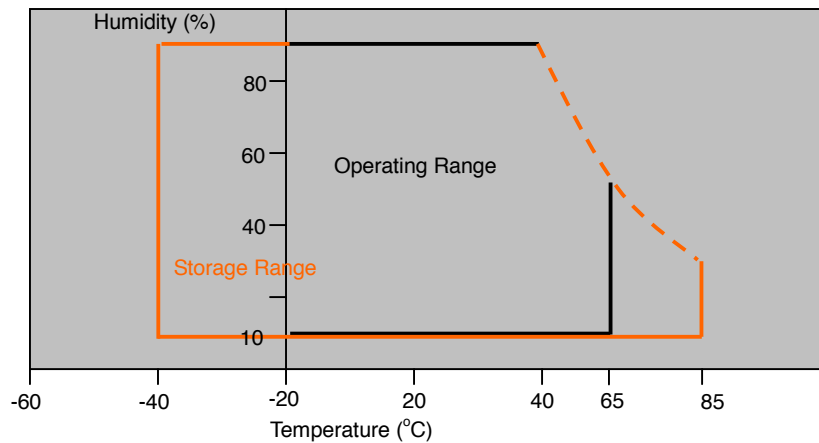


Note .Max wet bulb temp.=39°C

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	22/27
Document No.		Revision	

8.0 OUTLINE DIMENSION


8.0 Front View Outline Dimension

Unit : mm

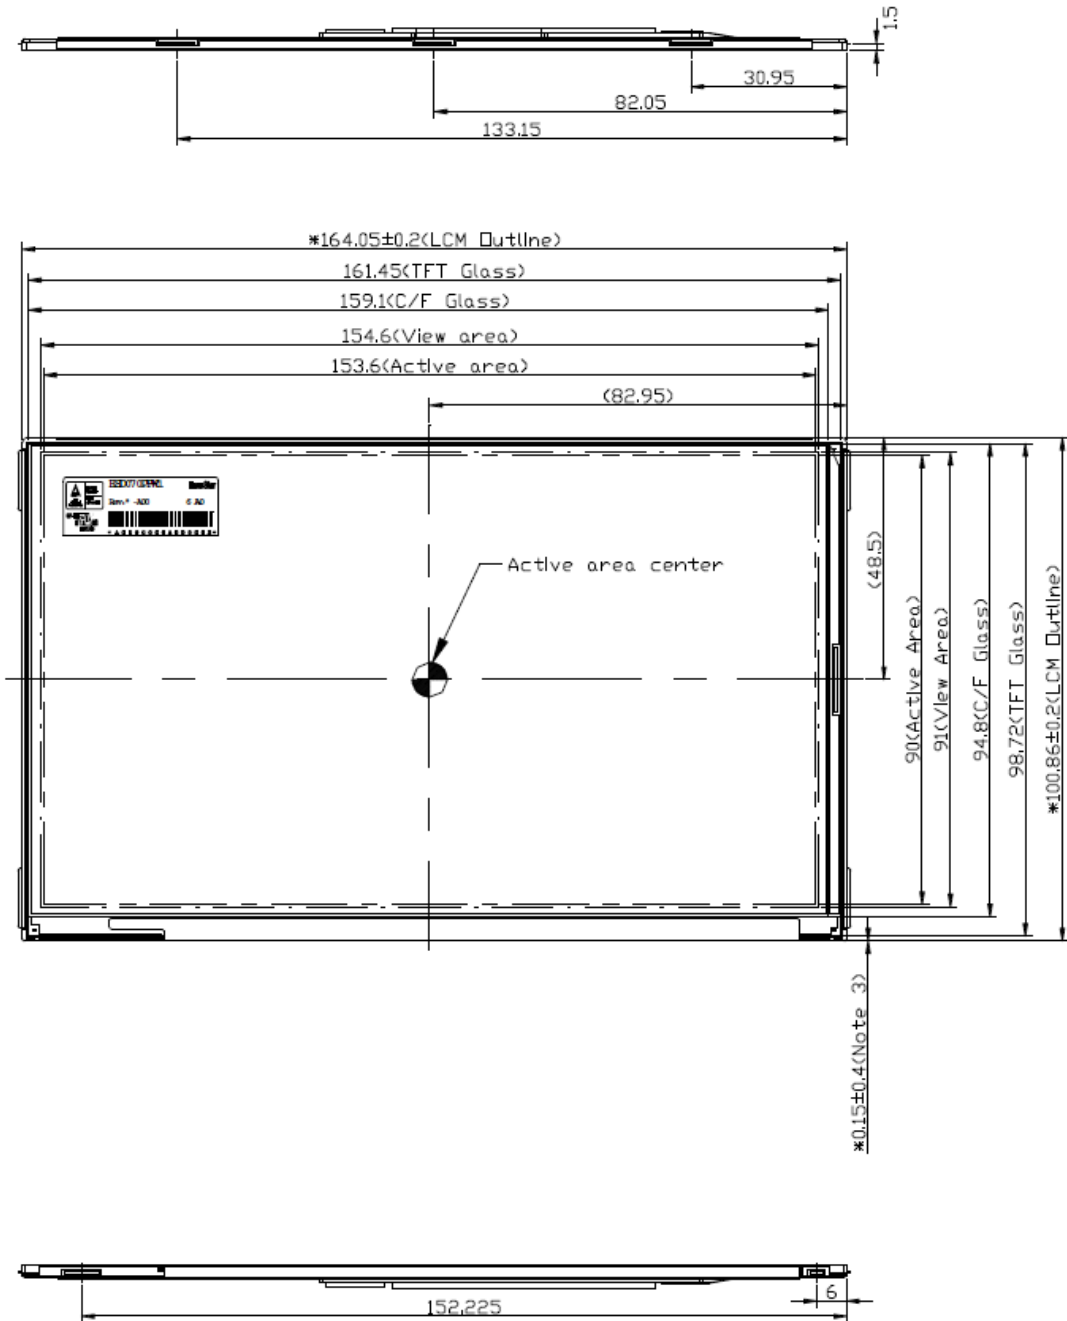

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	23/27
Document No.		Revision	

8.1 Front View Outline Dimension

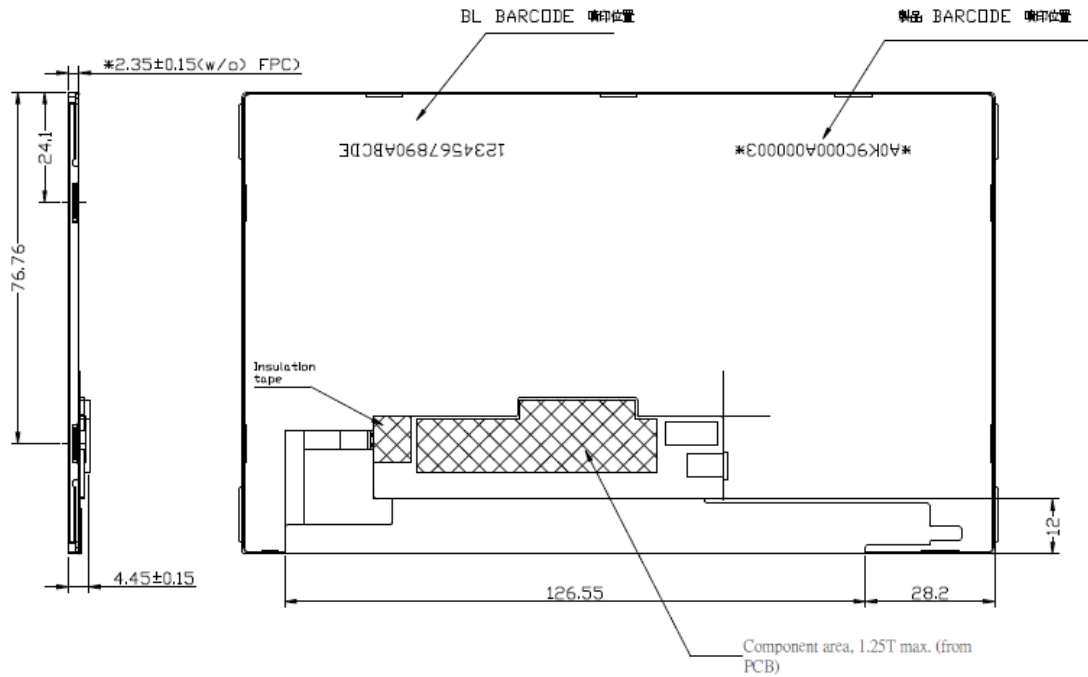

- NOTES :
1. " * " important dimension
 2. General tolerance : ±0.2mm
 3. FPC=0.1mm,EMI tape=0.05mm

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	24/27
Document No.		Revision	

9.0 LOT MARK

9.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

Code 1,2,3,4,5,6: HannStar internal flow control code.

Code 7: production location.

Code 8: production year.

Code 9: production month.

Code 10,11,12,13,14,15: serial number.

Note (1) Production Year


Year	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
Mark	6	7	8	9	0	1	2	3	4	5

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

9.2 Location of Lot Mark

- (1) Location : The label is attached to the backside of the LCD module. See Product back view. (Section 8.0 : OUTLINE DIMENSION)
- (2) Detail of the Mark : As attached below
- (3) This is subject to change without prior notice.

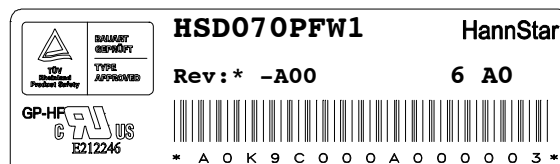


Document Title	HSD070PFW1-A Tentative Product Information	Page No.	25/27
Document No.		Revision	

10.0 PACKAGE SPECIFICATION

10.1 Packing form

LCM Model	LCM Qty. in the box	Inner Box Size (mm)	Notice
HSD070PFW1-A**	60pcs/box	456x350x187 ^(H)	

10.2 Packing assembly drawings

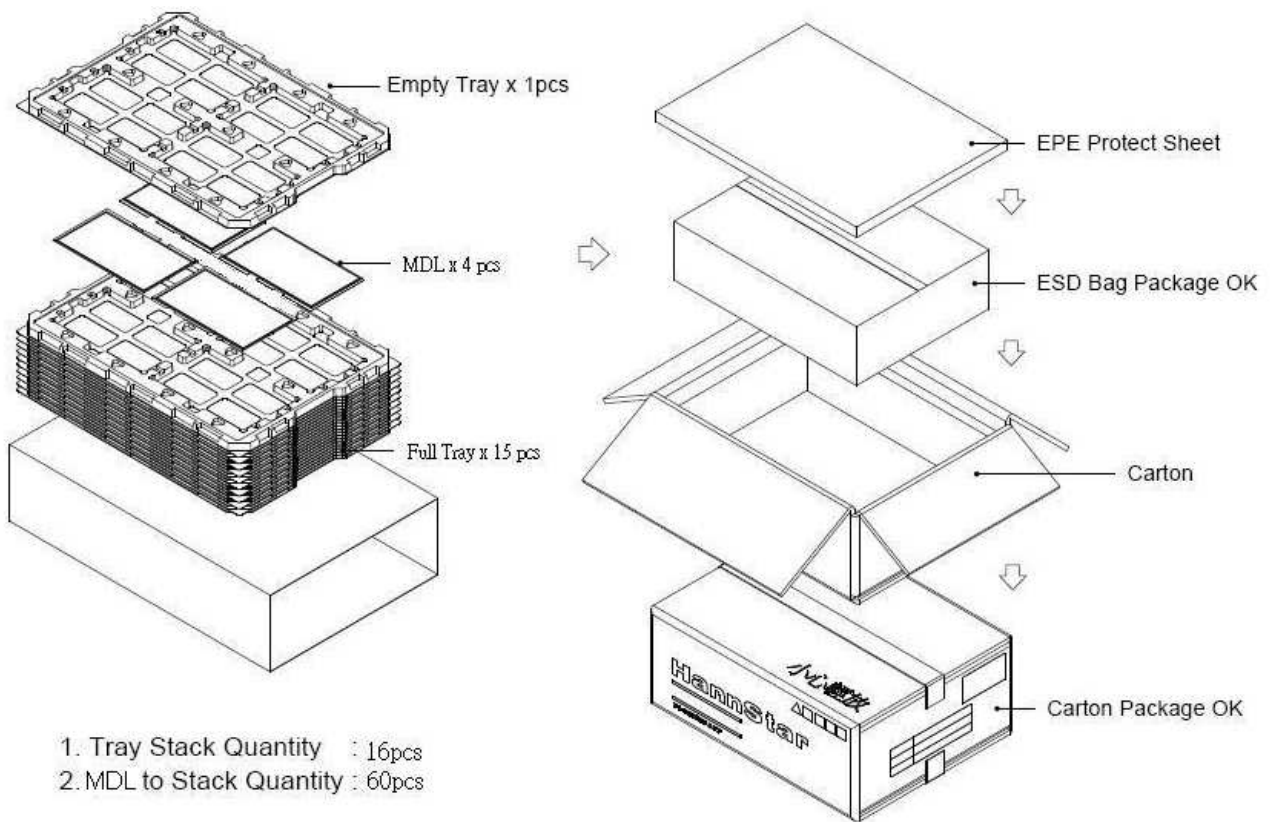

HSD070PFW1-A**	Material	Notice
Box	Corrugated Paper Board	AB Flute
Partition/Pad	Corrugated Paper Board	B Flute
Pad	Corrugated Paper Board	B Flute
Tray	PET	--
EPE	PE	--

Document Title	HSD070PFW1-A Tentative Product Information	Page No.	26/27
Document No.		Revision	

11.0 GENERAL PRECAUTION

11.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

11.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. HannStar does not warrant the module, if customers disassemble or modify the module.

11.3 Breakage of LCD Panel

11.3.1. If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

11.3.2. If liquid crystal contacts mouth or eyes, rinse out with water immediately.

11.3.3. If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

11.3.4. Handle carefully with chips of glass that may cause injury, when the glass is broken.

11.4 Electric Shock

11.4.1. Disconnect power supply before handling LCD module.

11.4.2. Do not pull or fold the LED cable.

11.4.3. Do not touch the parts inside LCD modules and the fluorescent LED's connector or cables in order to prevent electric shock.

11.5 Absolute Maximum Ratings and Power Protection Circuit

11.5.1. Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature, etc., otherwise LCD module may be damaged.

11.5.2. Please do not leave LCD module in the environment of high humidity and high temperature for a long time.


11.5.3. It's recommended to employ protection circuit for power supply.

11.6 Operation

11.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead.

11.6.2 Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.

11.6.3 When the surface is dusty, please wipe gently with absorbent cotton or other soft material.

 HannStar Display Corp.			
Document Title	HSD070PFW1-A Tentative Product Information	Page No.	27/27
Document No.		Revision	

11.6.4 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading.

11.6.5 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzine or other adequate solvent.

11.7 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.

11.8 Static Electricity

11.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.

11.8.2 Because LCD module use CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge. Please be careful with electrostatic discharge. Persons who handle the module should be grounded through adequate methods.

11.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

11.10 Disposal

When disposing LCD module, obey the local environmental regulations.